

DAS DOC NCCF EDUCATION BUILDING WINDOW

REPLACEMENT IOWA DAS

ROCKWELL CITY, IA

OWNERS PROJECT NUMBER: 9496.00
RFP 949600-01



CMBA ARCHITECTS
505 GRAND AVE
SPENCER, IA 51301
(P) 712.262.3426

DATE
04/27/2026
PROJECT
9496.00

TITLE

DAS DOC NCCF EDUCATION BUILDING WINDOW REPLACEMENT
IOWA DAS
ROCKWELL CITY, IA

SHEET
T0.01

SHEET INDEX

GENERAL	TITLE
TO.01	TITLE
ARCHITECTURAL	
A1.00	SITE PLANS
A2.00	FLOOR PLANS
A3.00	EXTERIOR ELEVATIONS & RCP
A5.00	WINDOW AND DETAILS
A5.01	WINDOW DETAILS

ABBREVIATIONS

AB	AIR BARRIER	HVAC	HEATING, VENTILATING, AIR CONDITIONING
AFF	ABOVE FINISH FLOOR	INT.	INTERIOR
ACT	ACUSTICAL CEILING TILE	JST.	JOIST
ALT.	ALTERNATE	JT.	JOINT
ALUM.	ALUMINUM	KIT.	KITCHEN
APPROX.	APPROXIMATE	LAV.	LAVATORY
ARCH.	ARCHITECT (DURAL)	MAX.	MAXIMUM
AVB	AIR AND VAPOR BARRIER	MB	MARKER BOARD
BD.	BOARD	MDF	MEDIUM DENSITY FIBERBOARD
BES	BUILDING ENVELOPE SEALANT	MECH.	MECHANICAL
BG	BUMPER GUARD	MFR	MANUFACTURER
BGW	BELOW GRADE WATERPROOFING	MIN.	MINIMUM
	MEMBRANE	MISC.	MISCELLANEOUS
B.O.	BOTTOM OF	NTL	NOT IN CONTRACT
BRG.	BEARING	NIC	NOMINAL
CC	CUBICLE CURTAIN	NOM.	NOMINAL
CFCI	CONTRACTOR FURNISHED-CONTRACTOR INSTALLED	NTS	NOT TO SCALE
CG	CORNER GUARD	OFOI	OWNER FURNISHED-OWNER INSTALLED
CJ	CONTROL JOINT	OFCI	OWNER FURNISHED-CONTRACTOR INSTALLED
CL	CENTERLINE	ORD	OVERFLOW ROOF DRAIN
CLG.	CEILING	PL	PLASTIC LAMINATE
CMU	CONCRETE MASONRY UNIT	PNL	PANEL
COL.	COLUMN	PT.	PAINT
CONC.	CONCRETE	R/RAD.	RADIUS
CONST.	CONSTRUCTION	RAF	RANGED ACCESS FLOOR
CONT.	CONTINUOUS	RD	ROOF DRAIN
CORR.	CORRIDOR	REF.	REFERENCE, REFER TO
CPT.	CARPET	REFR.	REFRIGERATOR
CR	CHAIR RAIL	REINF.	REINFORCE (DING)
CT	CERAMIC TILE	REQD.	REQUIRED
DIA.	DIAMETER	REV	REVISION (S) REVISED
DIM.	DIMENSION	RF	RESILIENT FLOORING
DN.	DOWN	RM.	ROOM
DS	DOWNSPOUT	RO	ROUGH OPENING
DTL.	DETAIL	RP	RESIN PANEL
DVB	DECK VAPOR BARRIER	RTU	ROOF TOP UNIT
DWG.	DRAWING	SAB	SOUND ATTENUATING BATTS
EA.	EACH	SCHED.	SCHEDULE
EG	END GUARD	SF	SQUARE FEET
EJ	EXPANSION JOINT	SIM.	SIMILAR
ELEC.	ELECTRICAL	SPEC	SPECIFICATION
ELEV.	ELEVATOR	SS	SOLID SURFACE
EPT	EPOXY PAINT	STD.	STANDARD
EQ.	EQUAL	STL.	STEEL
EQUIP.	EQUIPMENT	SSTL	STAINLESS STEEL
EW	EACH WAY	STOR.	STORAGE
EXIST.	EXISTING	STRUC.	STRUCTURAL
EXP.	EXPOSED	SUSP.	SUSPENDED
EXT.	EXTERIOR	T&B	TACK BOARD
FAF	FLUID APPLIED FLOORING	TERR.	TERRAZZO
FD	FLOOR DRAIN	T.O.	TOP OF
FE	FIRE EXTINGUISHER	T.O.B.	TOP OF BEAM
FEC	FIRE EXTINGUISHER CABINET	T.O.C.	TOP OF CONCRETE
FIN.	FINISHED	T.O.F.	TOP OF FOOTING
FLR.	FLOOR	T.O.W.	TOP OF WALL
FND.	FOUNDATION	TWP.	THROUGH-WALL PENETRATION
FRP	FIBERGLASS REINFORCED PANEL	TYP.	TYPICAL
FRT	FIRE RETARDANT TREATED	UVB	UNDER-SLAB VAPOR BARRIER
FTG.	FOOTING	VARS	VARIABLES
FV	FIELD VERIFY	VB	VAPOR BARRIER
GA.	GAUGE	VERT.	VERTICAL
GALV.	GALVANIZED	WC	WALL COVERING
GC	GENERAL CONTRACTOR	WD	WOOD
GFRG	GLASS FIBER REINFORCED GYPSUM	WDF	WOOD FLOORING
GL	GLASS	WDB	WOOD BASE
GYP.	GYPSUM	WP	WALL PROTECTION
GWB	GYPSUM WALL BOARD	WT	WINDOW TREATMENT
HM	HOLLOW METAL		
HORIZ.	HORIZONTAL		
HR	HANDRAIL		

GRAPHIC SYMBOLS

SITE SPOT ELEVATION

NEW FINISH SPOT GRADE
NEW AND EXISTING FINISH SPOT GRADE
TOP OF CURB BOT. OF CURB GRADE

107.53
N: 1107.23
E: 1107.88
TO: 1107.23
BC: 1107.88

NEW / EXISTING WALL CONSTRUCTION

EXISTING (SCREENED)
NEW (SCREENED)

COLUMN GRID LINE

NEW (A)
EXISTING (A)

ROOM NAME AND NUMBER

ROOM NAME
101 - ROOM NUMBER
150 SF - ROOM SQUARE FOOTAGE

BUILDING SECTION / WALL SECTION

SECTION DIRECTION
DETAIL NUMBER
SHEET NUMBER

DOOR NUMBER

5 DIGIT (N/A) - ROOM NUMBER
4 DIGIT (N/A) - ALPHABET CHARACTERS USED TO DISTINGUISH BETWEEN MULTIPLE DOORS THAT ARE ASSOCIATED WITH PARTICULAR ROOMS

DETAILS

DETAIL NUMBER
SHEET NUMBER

WINDOW TYPE

SPOT ELEVATION
8'-0"

KEY NOTES

INDICATES A NOTE FOR A SPECIFIC ITEM
ALL KEY NOTES ARE COMPILED UNDER THE TITLE BAR "KEY NOTES"

EXTERIOR ELEVATION

ELEVATION DIRECTION
ELEVATION NUMBER
SHEET NUMBER

INTERIOR ELEVATION

ELEVATION DIRECTION
ELEVATION NUMBER
SHEET NUMBER

REVISION MARKER

TOILET ACCESSORIES TAG


WALL TAG

ASSEMBLY TYPE TAG

MATERIAL INDICATIONS

EARTH	WOOD STUDS	GRAVEL / SAND FILL	FINISHED WOOD	METAL (LARGE SCALE)
METAL STUDS	PLYWOOD	CONCRETE	RIGID INSULATION	WOOD BLOCKING
METAL SECTION	INSULATION (BLANKET OR BATT)	BRICK	SEALANT	EXISTING CONSTRUCTION
CMU (STD. WT.)	GLASS FIBER REINFORCED GYPSUM BOARD	STONE	GYPSUM BOARD	ACUSTICAL CEILING
MINERAL WOOL	SPRAY FOAM	AIR SEAL		

PROJECT LOCATION

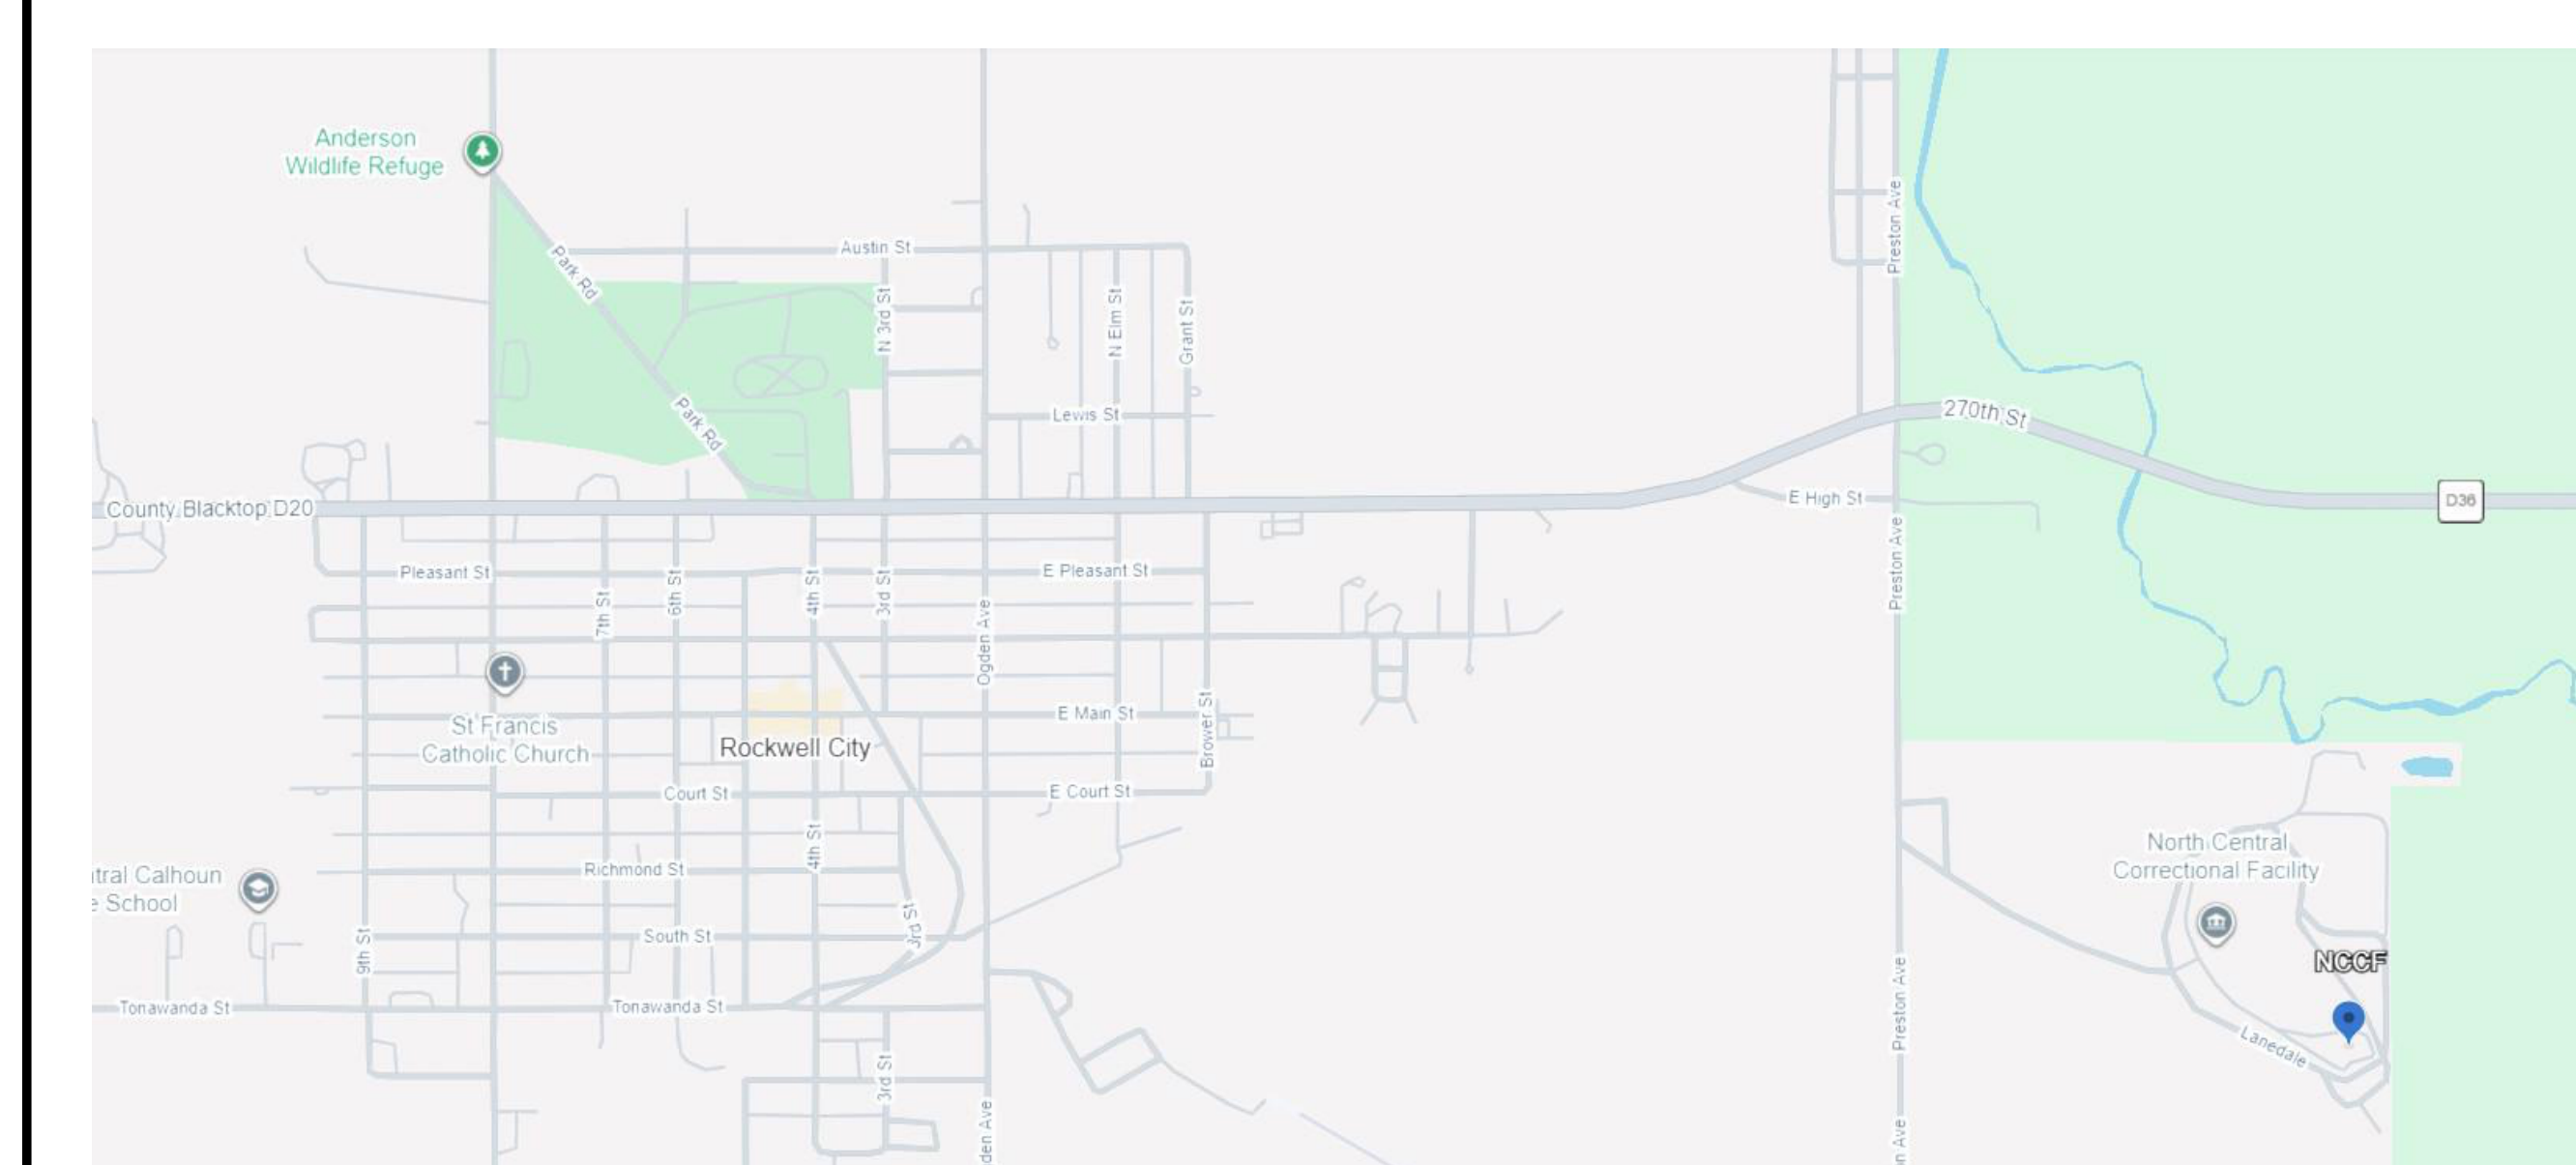

NOT TO SCALE

PROFESSIONAL SEALS

ARCHITECT

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and responsible charge. I am a duly Licensed Architect under the laws of the State of

Signature: *Adam Donovan Van Gorp* Date: 05/01/2026
Printed or typed name: **ADAM DONAVAN VAN GORP**
License Number: **07319**
My license renewal date is **JUNE 30TH, 2027**

Pages or sheets covered by this seal:
 ALL "T" & "A" SHEETS

PROJECT SUMMARY

REPLACEMENT OF WINDOWS ON THE NORTH CENTRAL CORRECTIONAL FACILITY INDICATED WINDOWS AS SHOWN ON THE DRAWINGS. REFERENCE FULL BUILDING DRAWINGS FOR CODE INFORMATION ADDRESSING THE EXISTING BUILDING.

STATE OF IOWA:

- 2024 IBC: ALL APPLICABLE CHAPTERS
- 2024 International Building Code as adopted by Iowa Administrative Rule chapters 661-201 and 661-301
- 2024 International Fire Code as adopted by Iowa Administrative Rule chapters 661-201
- 2012 International Energy Conservation Code as adopted by Iowa Administrative Rule chapters 661-303
- 2024 International Existing Building Code as adopted by Iowa Administrative Rule chapters 661-301 and 661-350
- 2012 NFPA 101 Life Safety Code as adopted by Iowa Administrative Rule chapter 661-205
- 2010 Americans with Disabilities Act as adopted by Iowa Administrative Rule chapter 661-302
- State Mechanical Code as adopted by the Department of Public Health Iowa Administrative Rule chapter 641-61
- State Plumbing Code as adopted by the Department of Public Health Iowa Administrative Rule chapter 641-25
- State Electrical Code as adopted by the State Electrical Licensing Board Iowa Administrative Rule chapter 661-504
- ANSI 117.1, 2009, ALL APPLICABLE CHAPTERS

OWNER

Iowa Department of Administrative Services
Owner's Representative:
Jennie Elliott
State Design & Construction Resources Bureau
109 S.E. 13th Street
Des Moines, IA 50319
Office: 515-746-3244

On Site Contact:
Plant Operations Manager:
Wade Hammen
313 Lendalee
Rockwell City, IA 50579
PH: 712-850-8540

ARCHITECT

CMBA Architects
505 Grand Avenue
Spencer, IA 51301
PH: 712-262-3426
Architect Responsible: Adam Van Gorp, AIA
Email: vangorp@cmbarchitects.com

BUILDING OFFICIAL:

The Iowa Department of Inspections, Appeals, and Licensing, Building & Construction Division

	IBC 2024	RED / ALLOWED	PROVIDED
USE AND OCCUPANCY	CHAPTER 3		E
CONSTRUCTION TYPE	SECTION 602 / TABLE 601		VB
AUTOMATIC SPRINKLER SYSTEM	SECTION 903	YES	NO
BUILDING HEIGHT	TABLE 504.3	55 MAX	Approx. 35'
BUILDING STORIES	TABLE 504.3	2 STORIES	3
LARGEST FLOOR AREA / STORY / 1ST FLOOR AREA	TABLE 506.2		

LEVEL 1 ALTERATION PER IBC

REVISIONS

NO.	DESCRIPTION	DATE

© COPYRIGHT. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of construction of the project or structure. Unauthorized copying, distribution or construction use without written permission of Carson Ross Brygger & Associates is prohibited by copyright law.



1 SITE PLAN
1" = 20'-0"

GENERAL NOTES

- A** CONTRACTOR TO COORDINATE IN ADVANCE WITH OWNER FOR ALL GATE PASSING.
- B** SEE SPECIFICATIONS FOR DAILY TOOL INVENTORY REQUIREMENTS.
- C** CONTRACTOR IS RESPONSIBLE FOR HAULING MATERIALS INCLUDING CONSTRUCTION WASTE IN AND OUT OF THE OUTERMOST FENCED AREA EACH DAY. MAY BE SUBJECT TO INSPECTION.
- D** PROTECT UNDERGROUND UTILITY LINES IDENTIFIED ON THE SITE PLAN. VERIFY LOCATION WITH OWNER.
- E** ALL CONTRACTORS PERSONNEL ARE TO HAVE BACKGROUND CHECKS PRE-APPROVED AND COMPLETE PREA TRAINING BEFORE BEING ALLOWED ON SITE FOR WORK.
- F** CONTRACTOR TO COORDINATE IN ADVANCE WITH NCCF STAFF FOR ALL GATE PASSING. GATE LOCATIONS ARE IDENTIFIED IN THE DOCUMENTS. KEEP GATES CLEAR AT ALL TIMES EXCEPT FOR COORDINATED PASSING.
- G** ALL WORK AREAS ARE TO BE THOROUGHLY CLEANED AT THE END OF EACH DAY.
- H** SEE SPECIFICATION FOR DAILY TOOL INVENTORY REQUIREMENTS. A STANDARDIZED LIST OF DAILY TOOLS ENTERING AND EXITING IS PREFERRED. ALL CONSTRUCTION EQUIPMENT MUST BE REMOVED FROM THE SITE DAILY TO THE DESIGNATED STAGING AREA IN THE PARKING LOT WITH THE EXCEPTION OF A JOB BOX THAT CAN REMAIN SECURED ON THE ROOF AREA.
- I** SEE SPECIFICATIONS FOR SITE ACCESS, STORAGE, WASTE REMOVAL, AND WORK HOURS.
- J** PROTECT GRASS AREAS FROM EQUIPMENT AND LIFTS. SEE DRAWING FOR PROTECTED UNDERGROUND UTILITY LINES. DAMAGE IS THE RESPONSIBILITY OF THE CONTRACTOR TO REPAIR.

KEYNOTES

- ① BUILDING LOCATION
- ② CONTRACTOR PARKING
- ③ SALLY PORT - SITE ACCESS ONLY THROUGH THIS GATE

LEGEND

- UTILITY AREA - PRESSURE SENSITIVE
- GATE
- FENCE


REVISIONS

NO.	DESCRIPTION	DATE

IF THIS DRAWING IS NOT 30"x42" IT IS NOT TO SCALE

© COPYRIGHT. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of reconstruction of this project or work item. Unauthorized copying, disclosure or construction use without written permission of Carson Ross Brygger & Associates is prohibited by copyright law.


FILE: \\sawtooth\projects\2025\9496.00 DAS DOC NCCF Education Building Window Replacement\CONSTRUCTION\DOC\9496.00_SitePlan.dwg
 DATE: 04/27/2026 10:44 AM

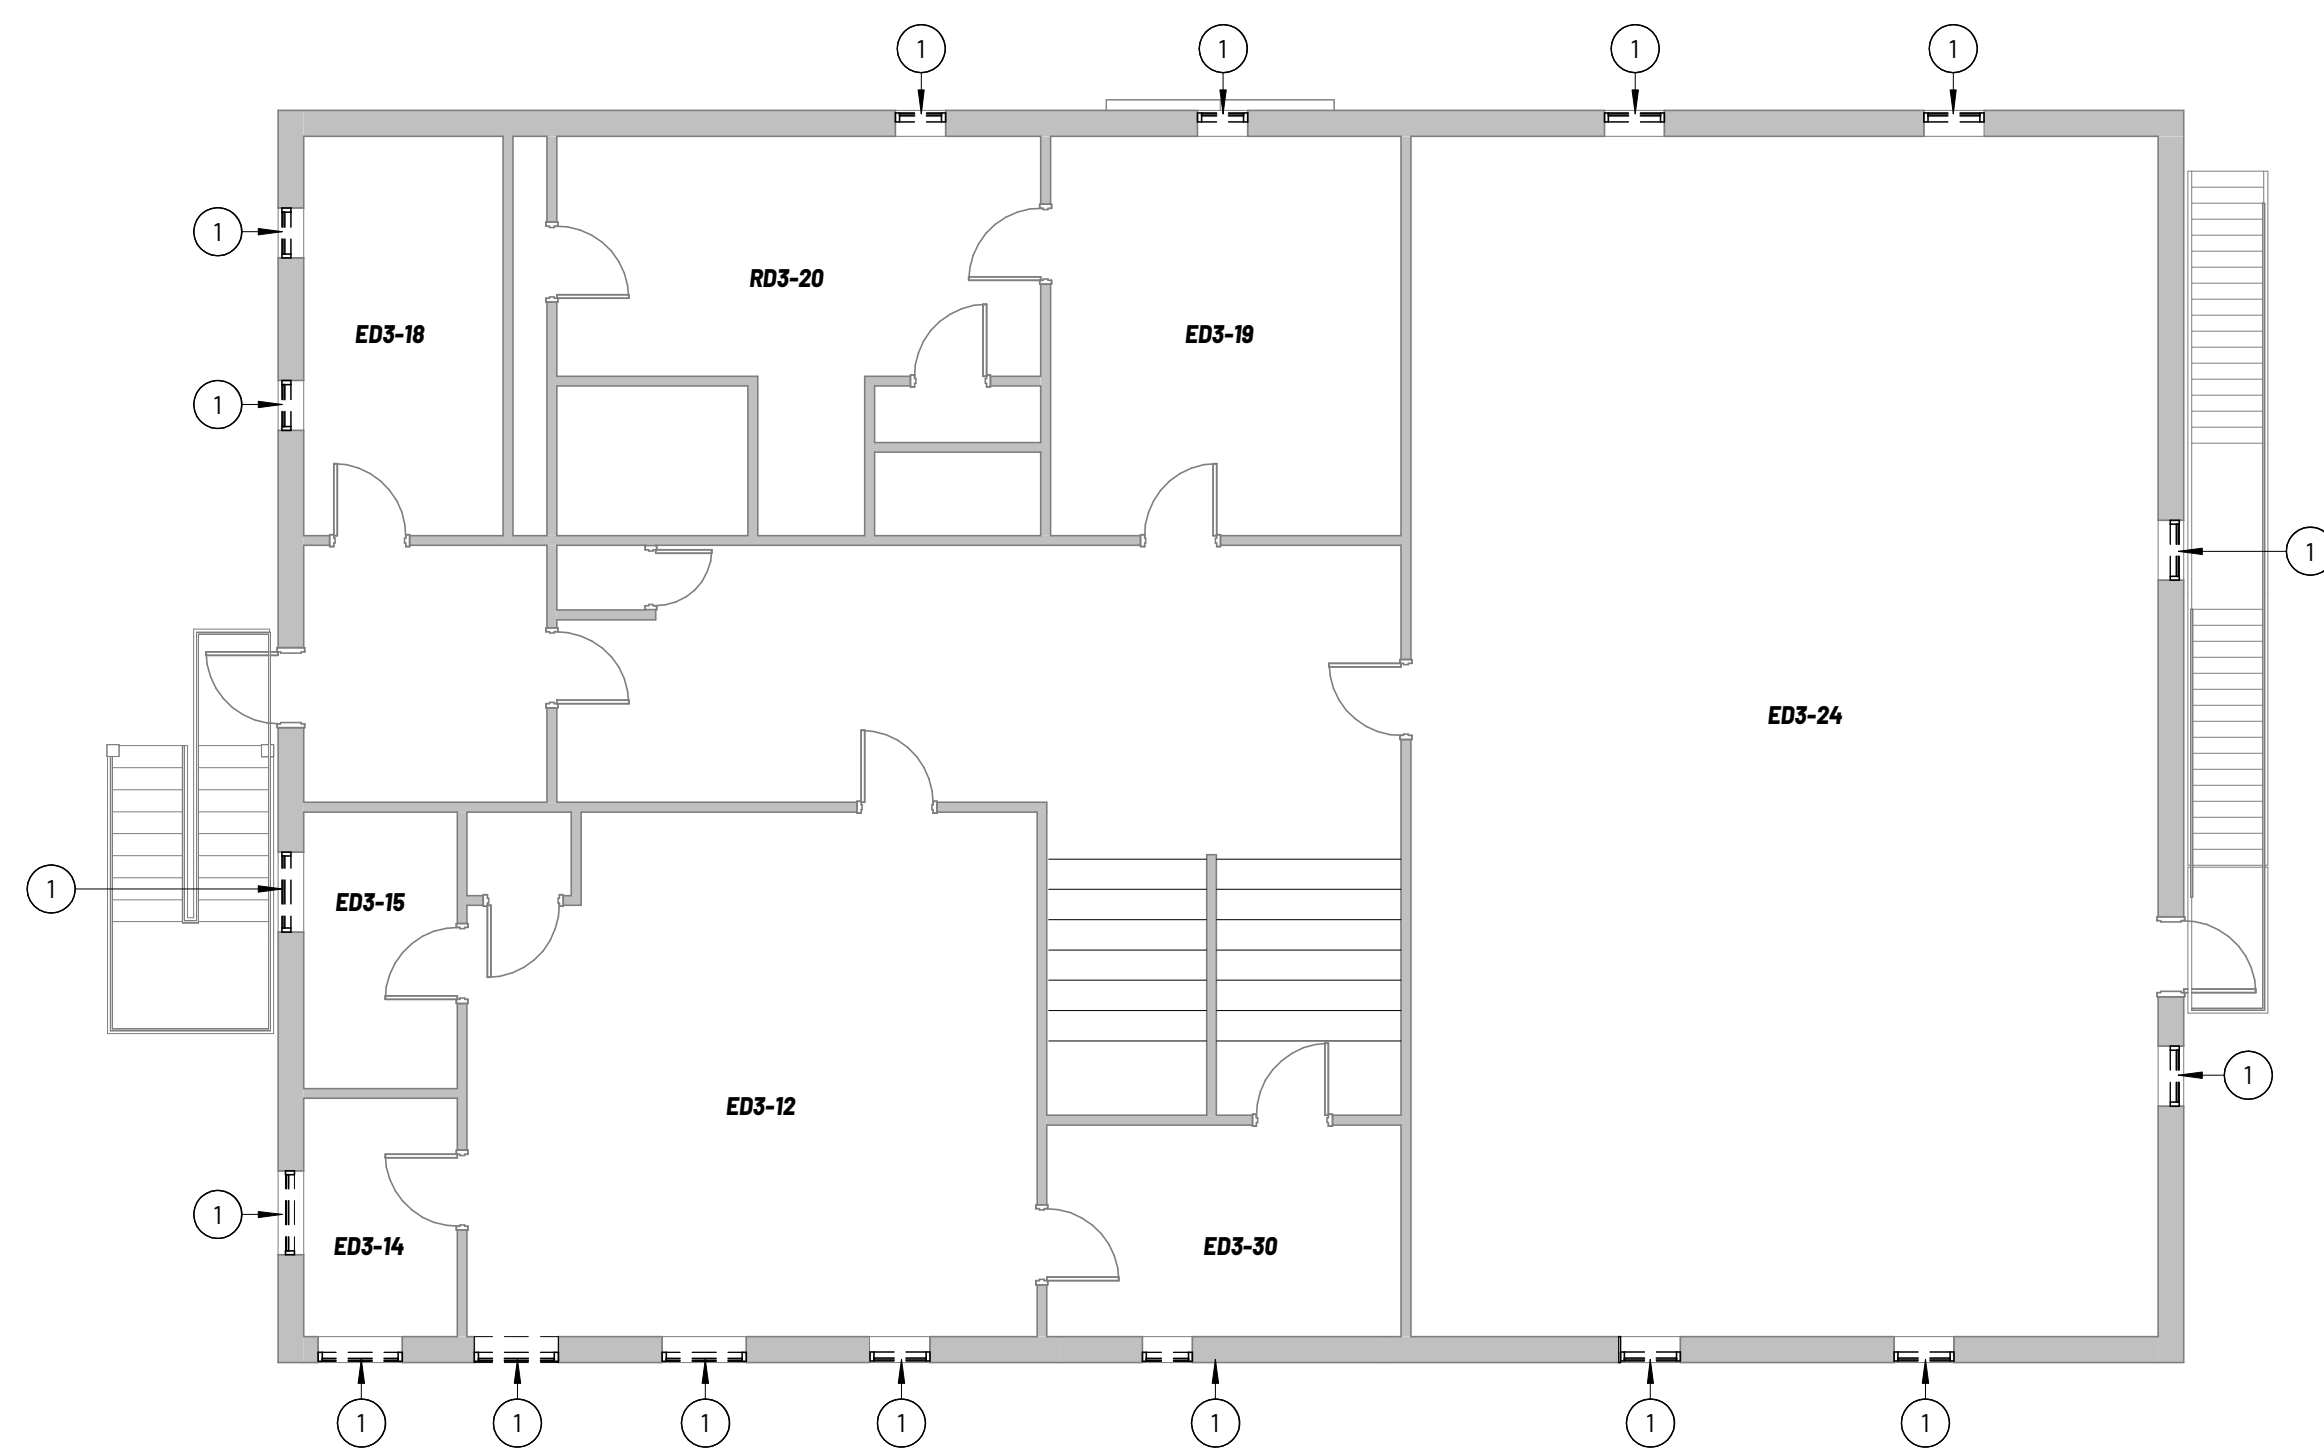


1 Floor 03 - DEMO
1/8" = 1'-0"




4 FLOOR 3 - RCP
1/8" = 1'-0"

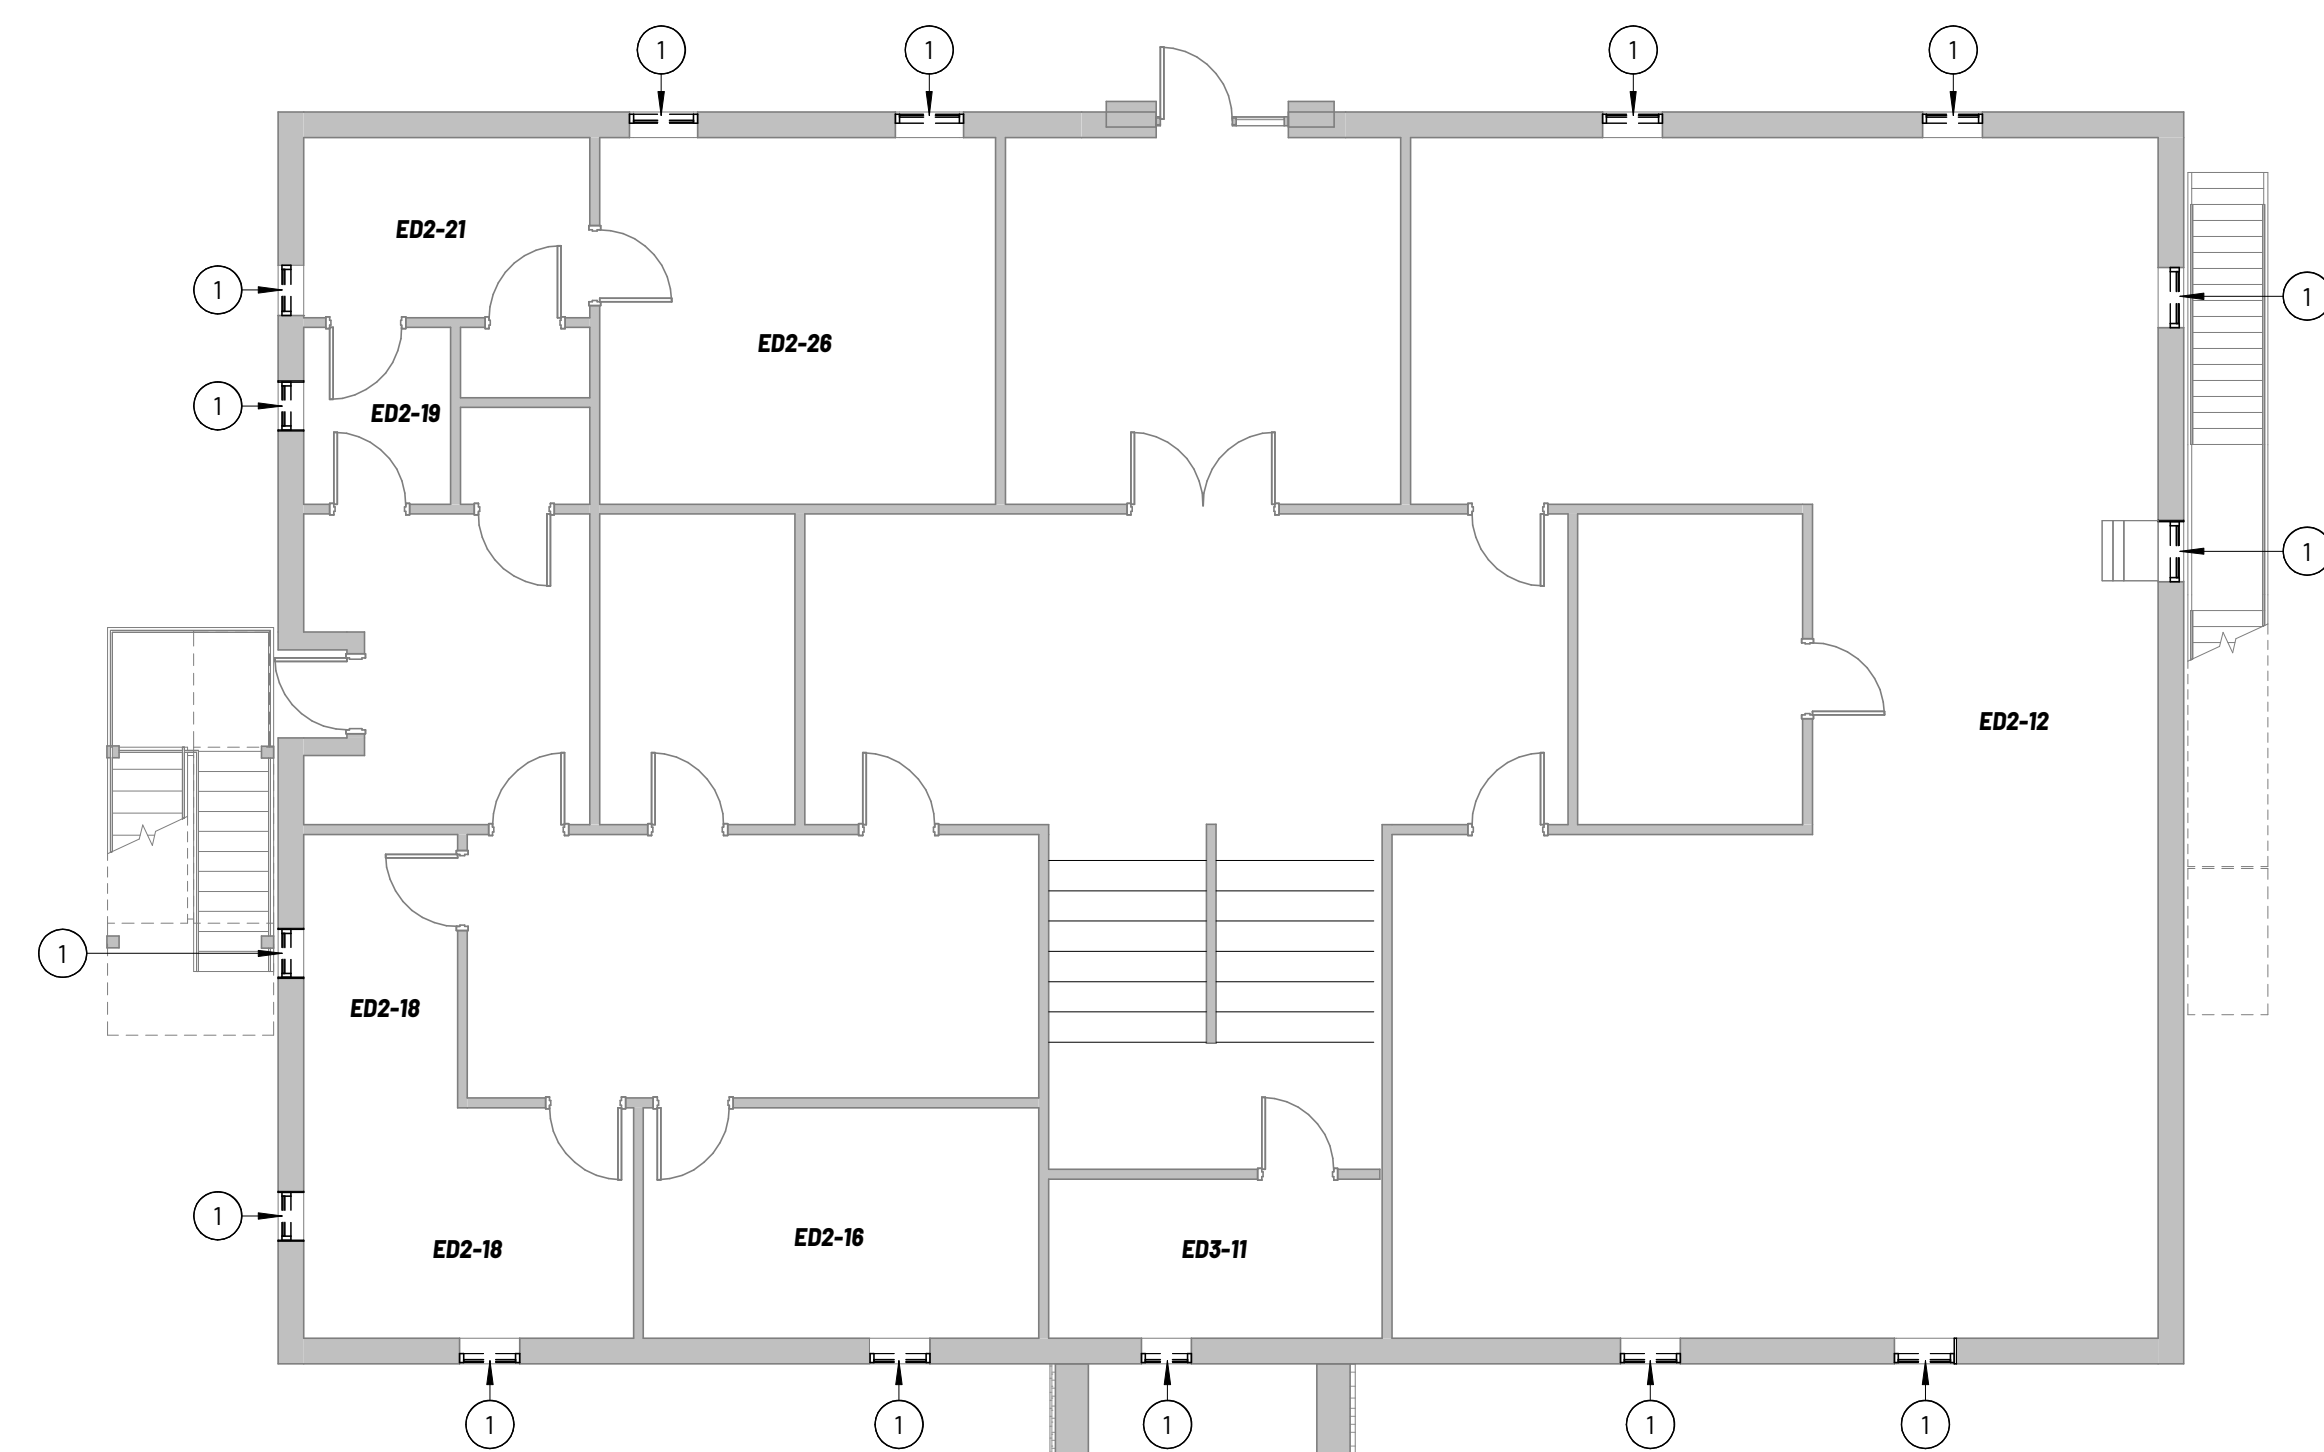


2 FLOOR 02 - DEMO
1/8" = 1'-0"

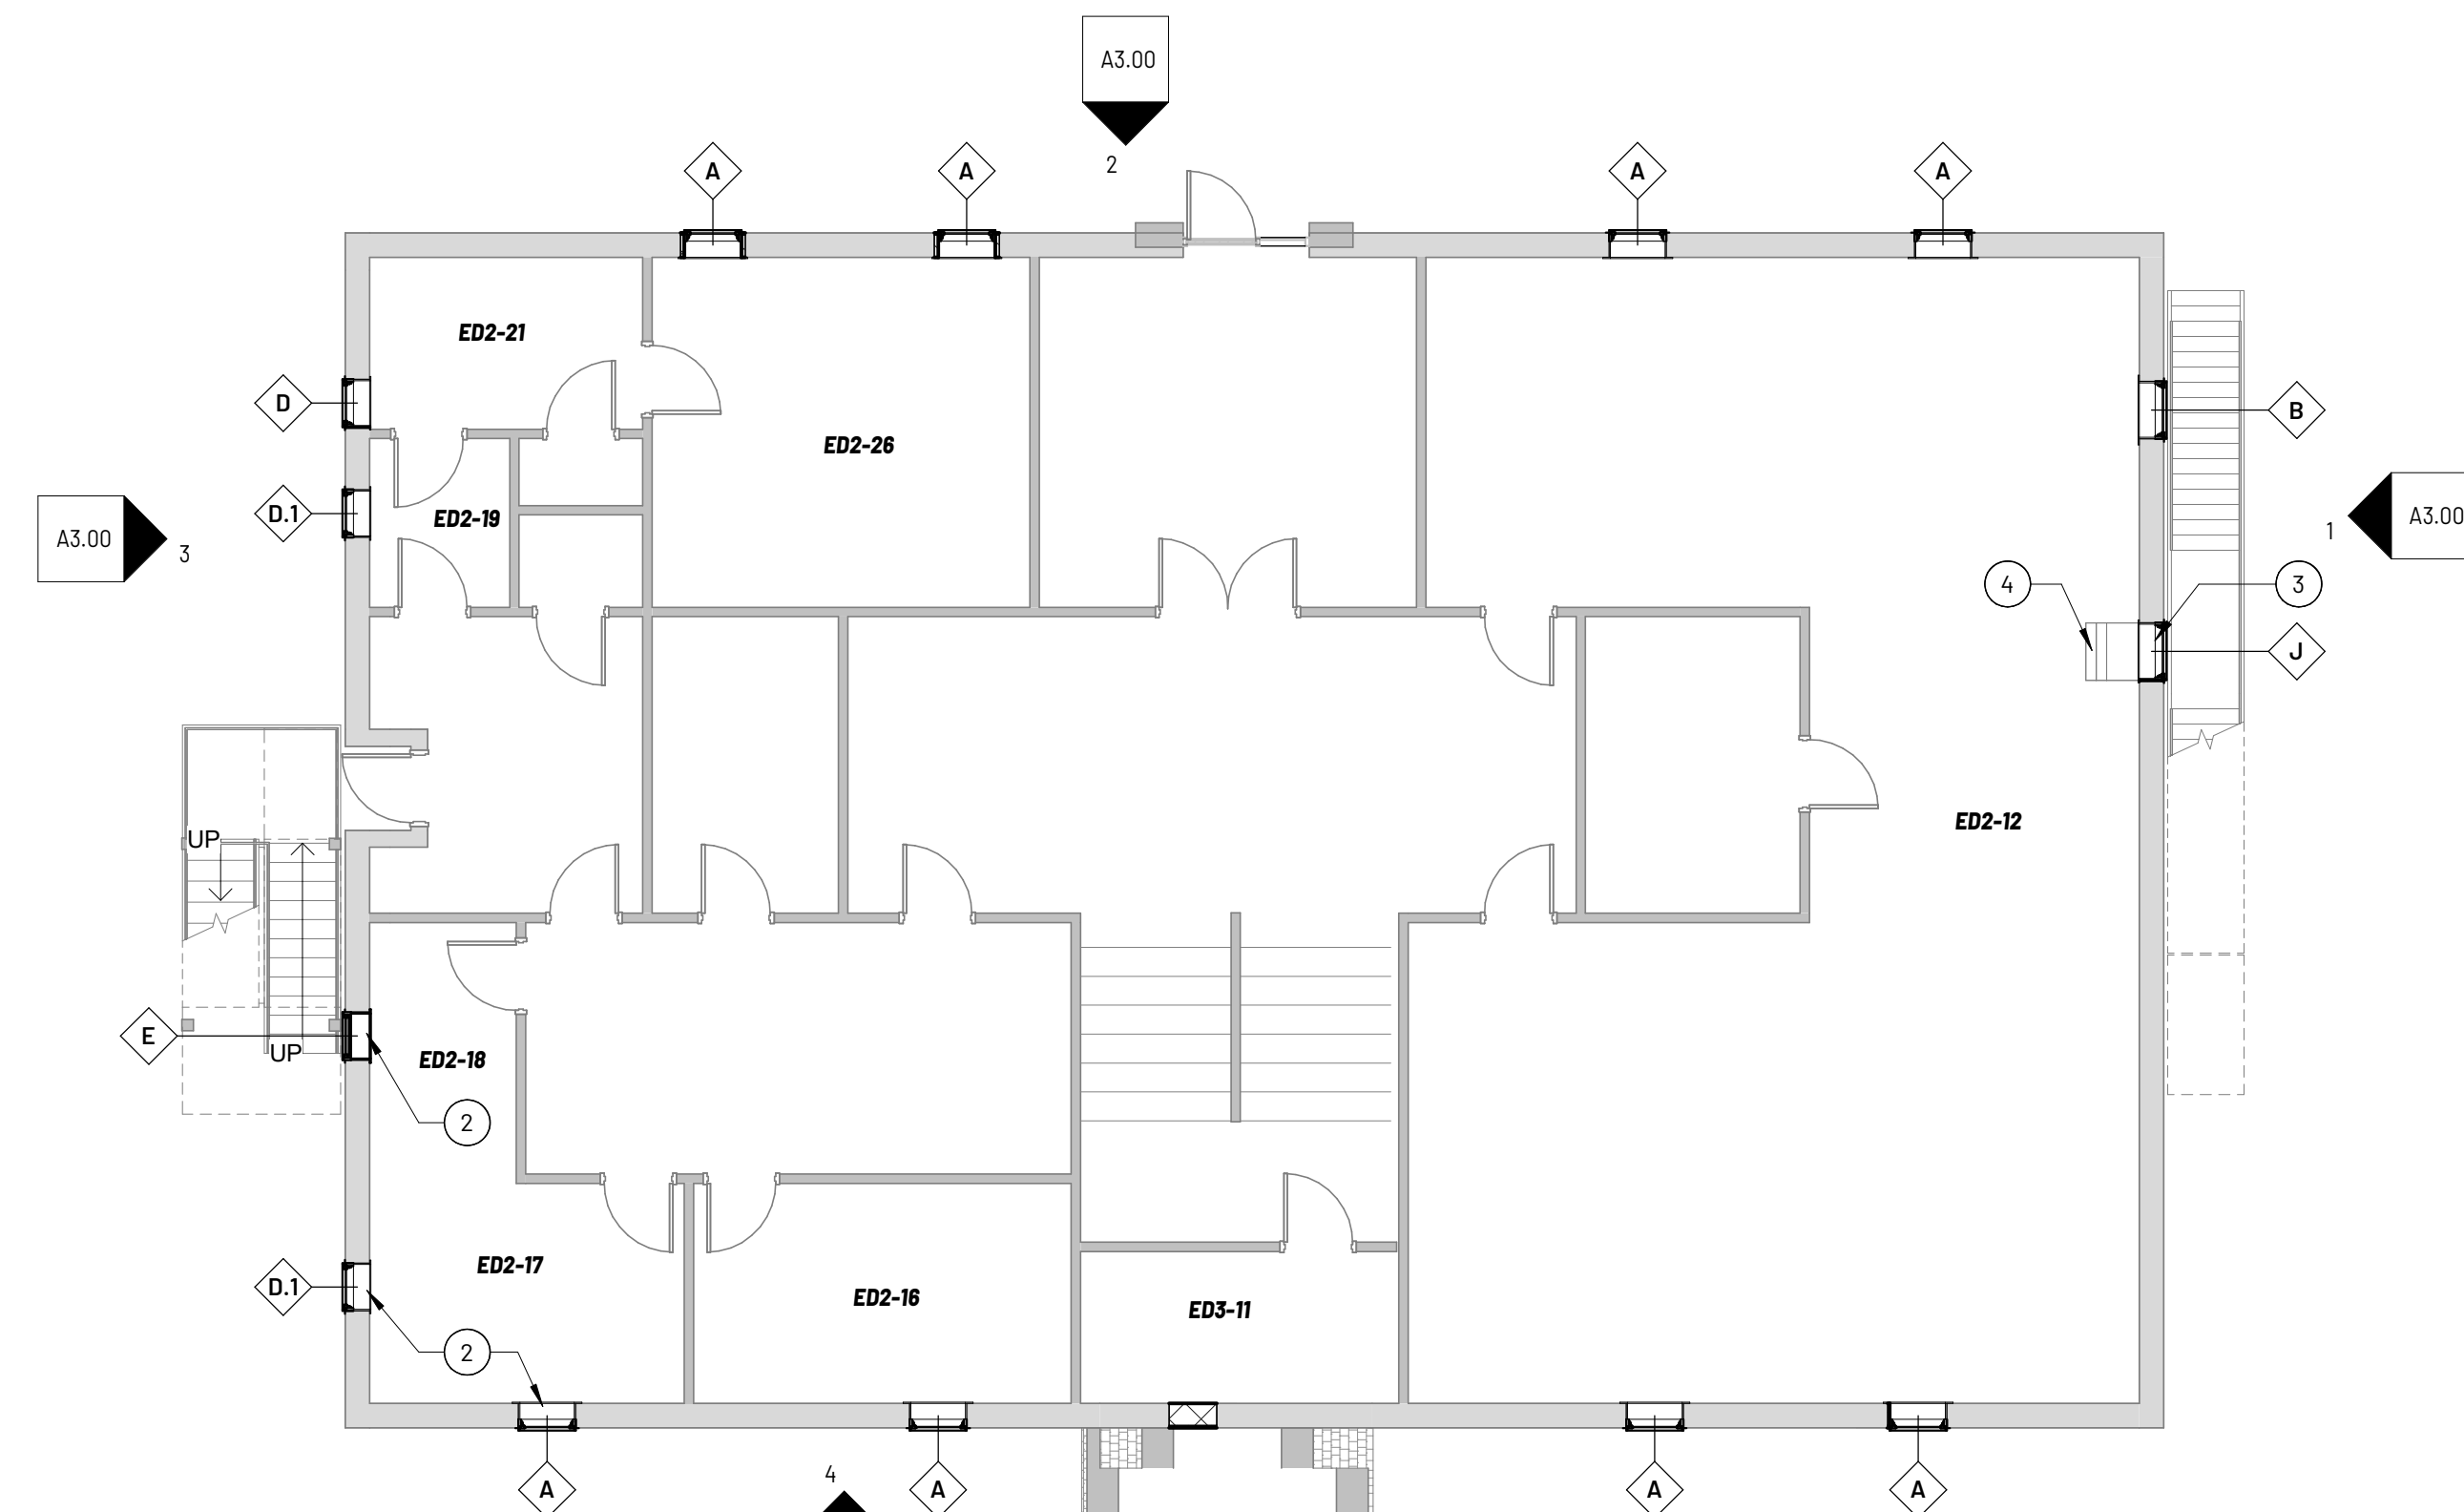

5 Floor 02
1/8" = 1'-0"

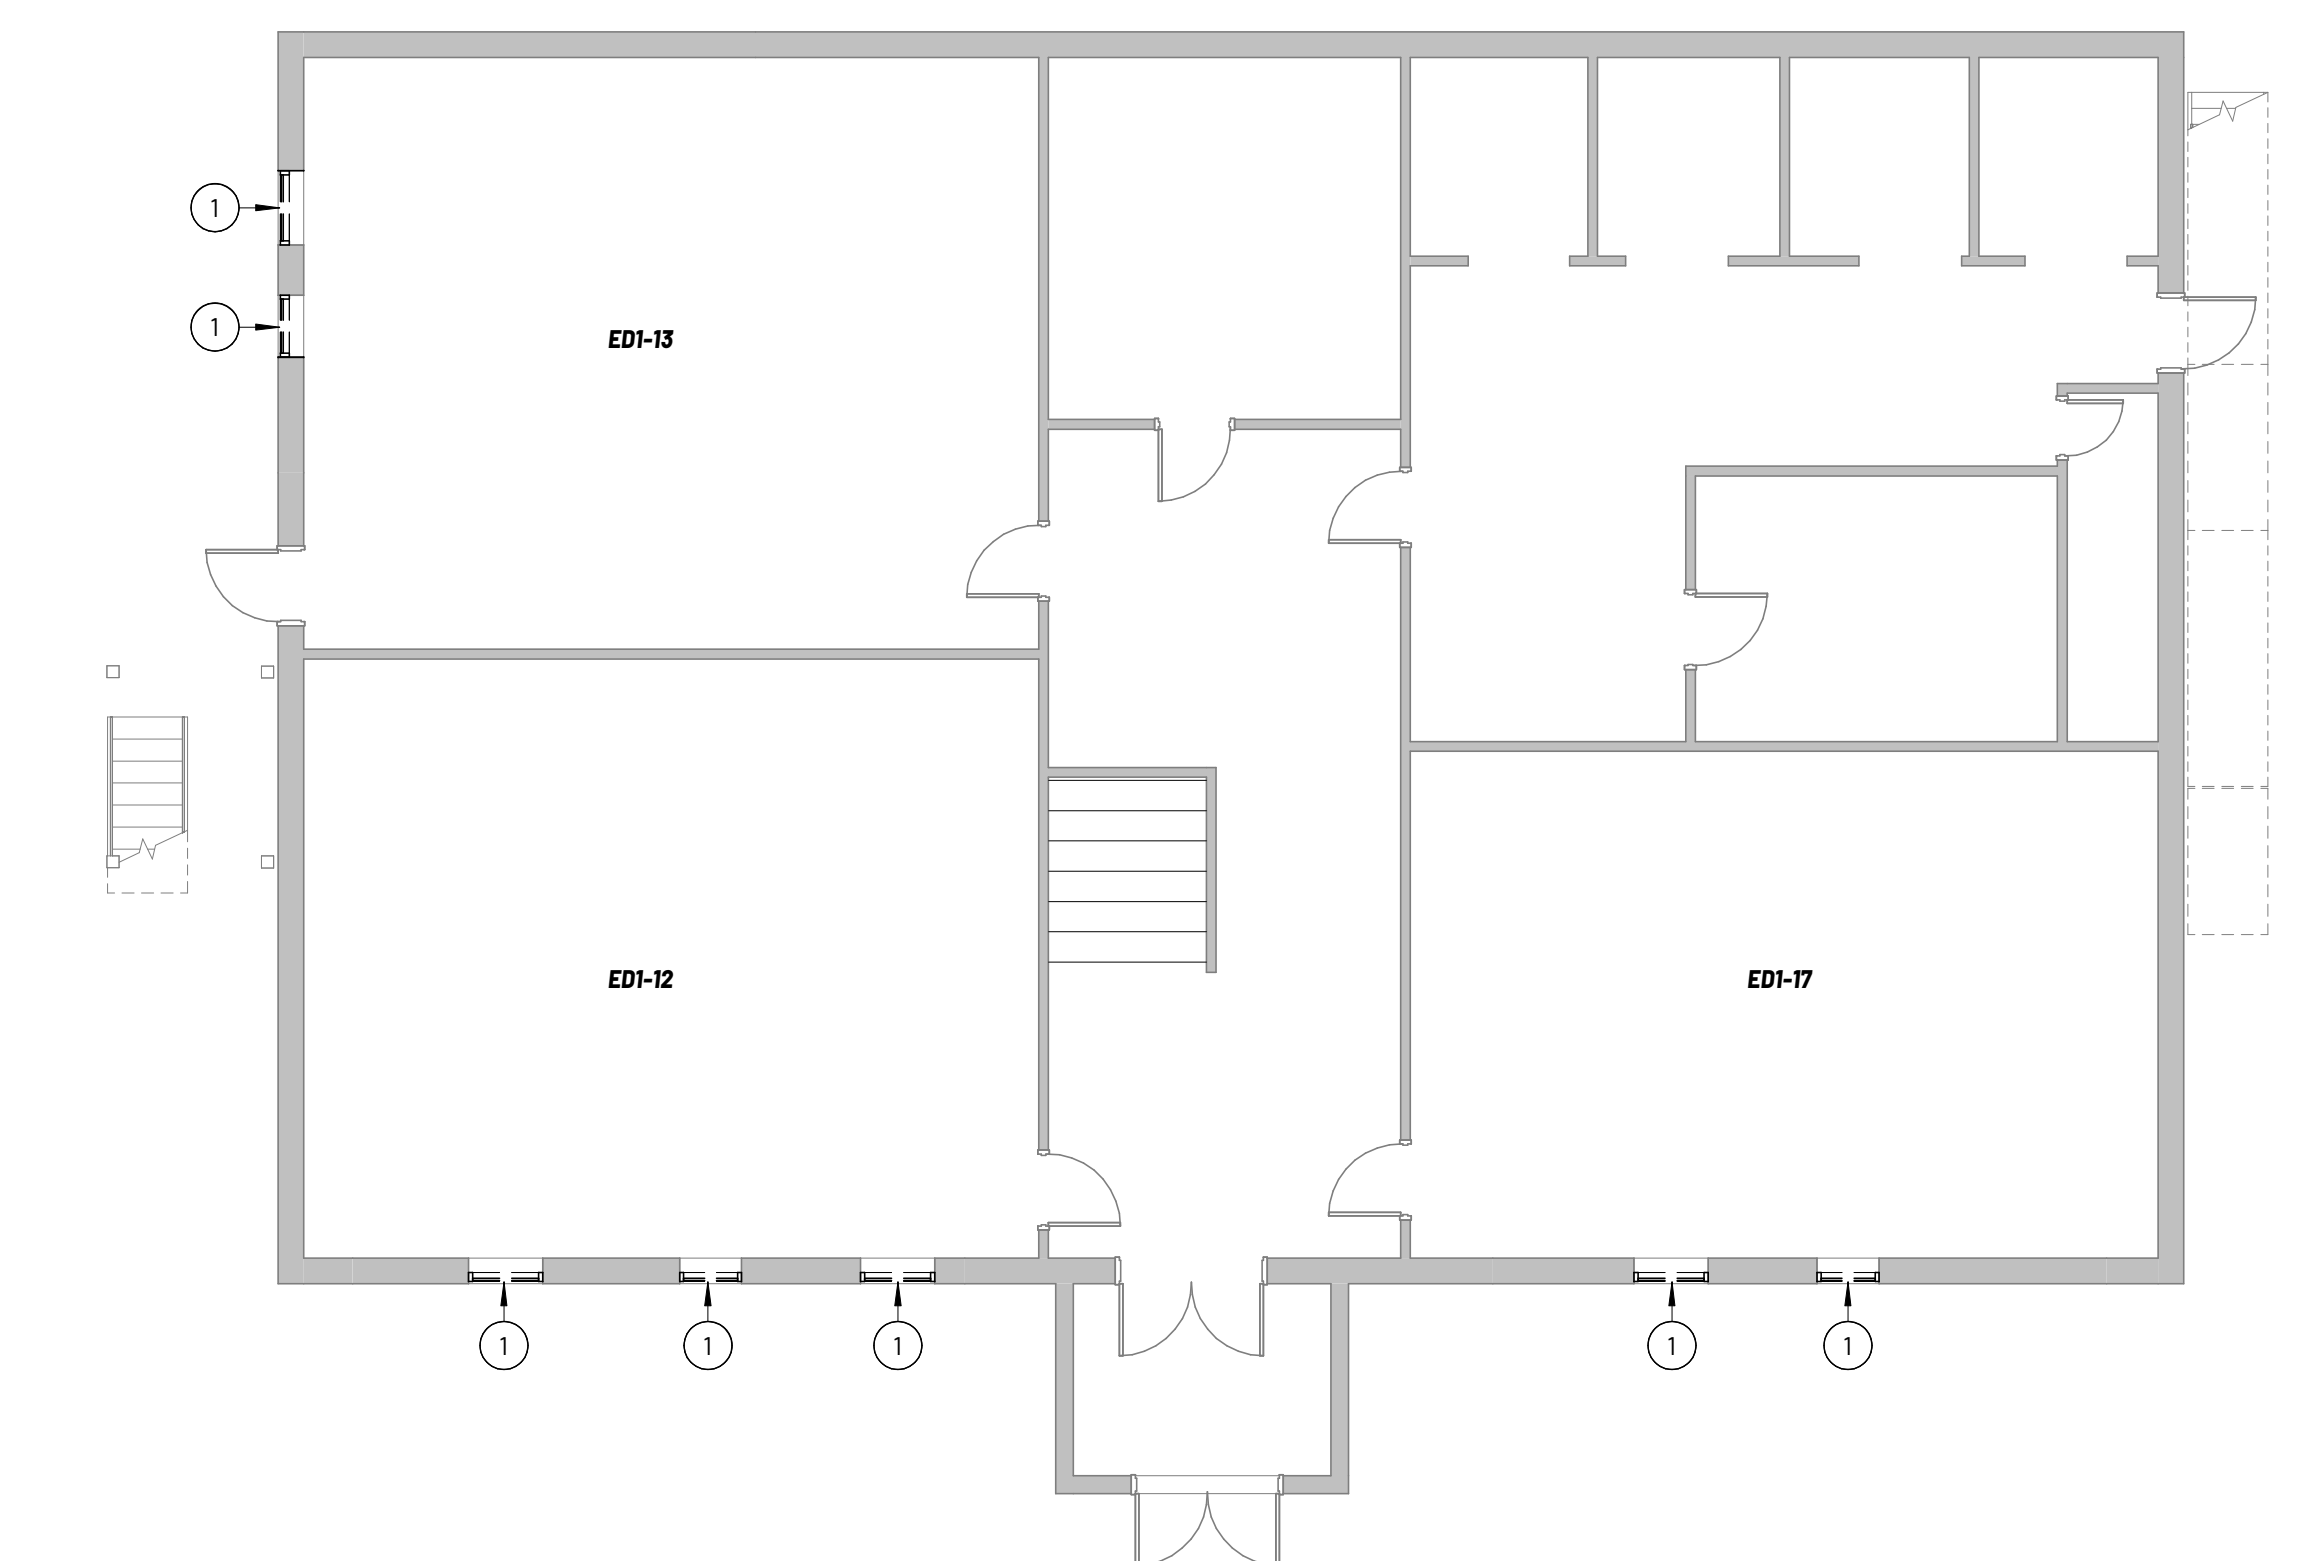

3 Floor 01 - DEMO
1/8" = 1'-0"

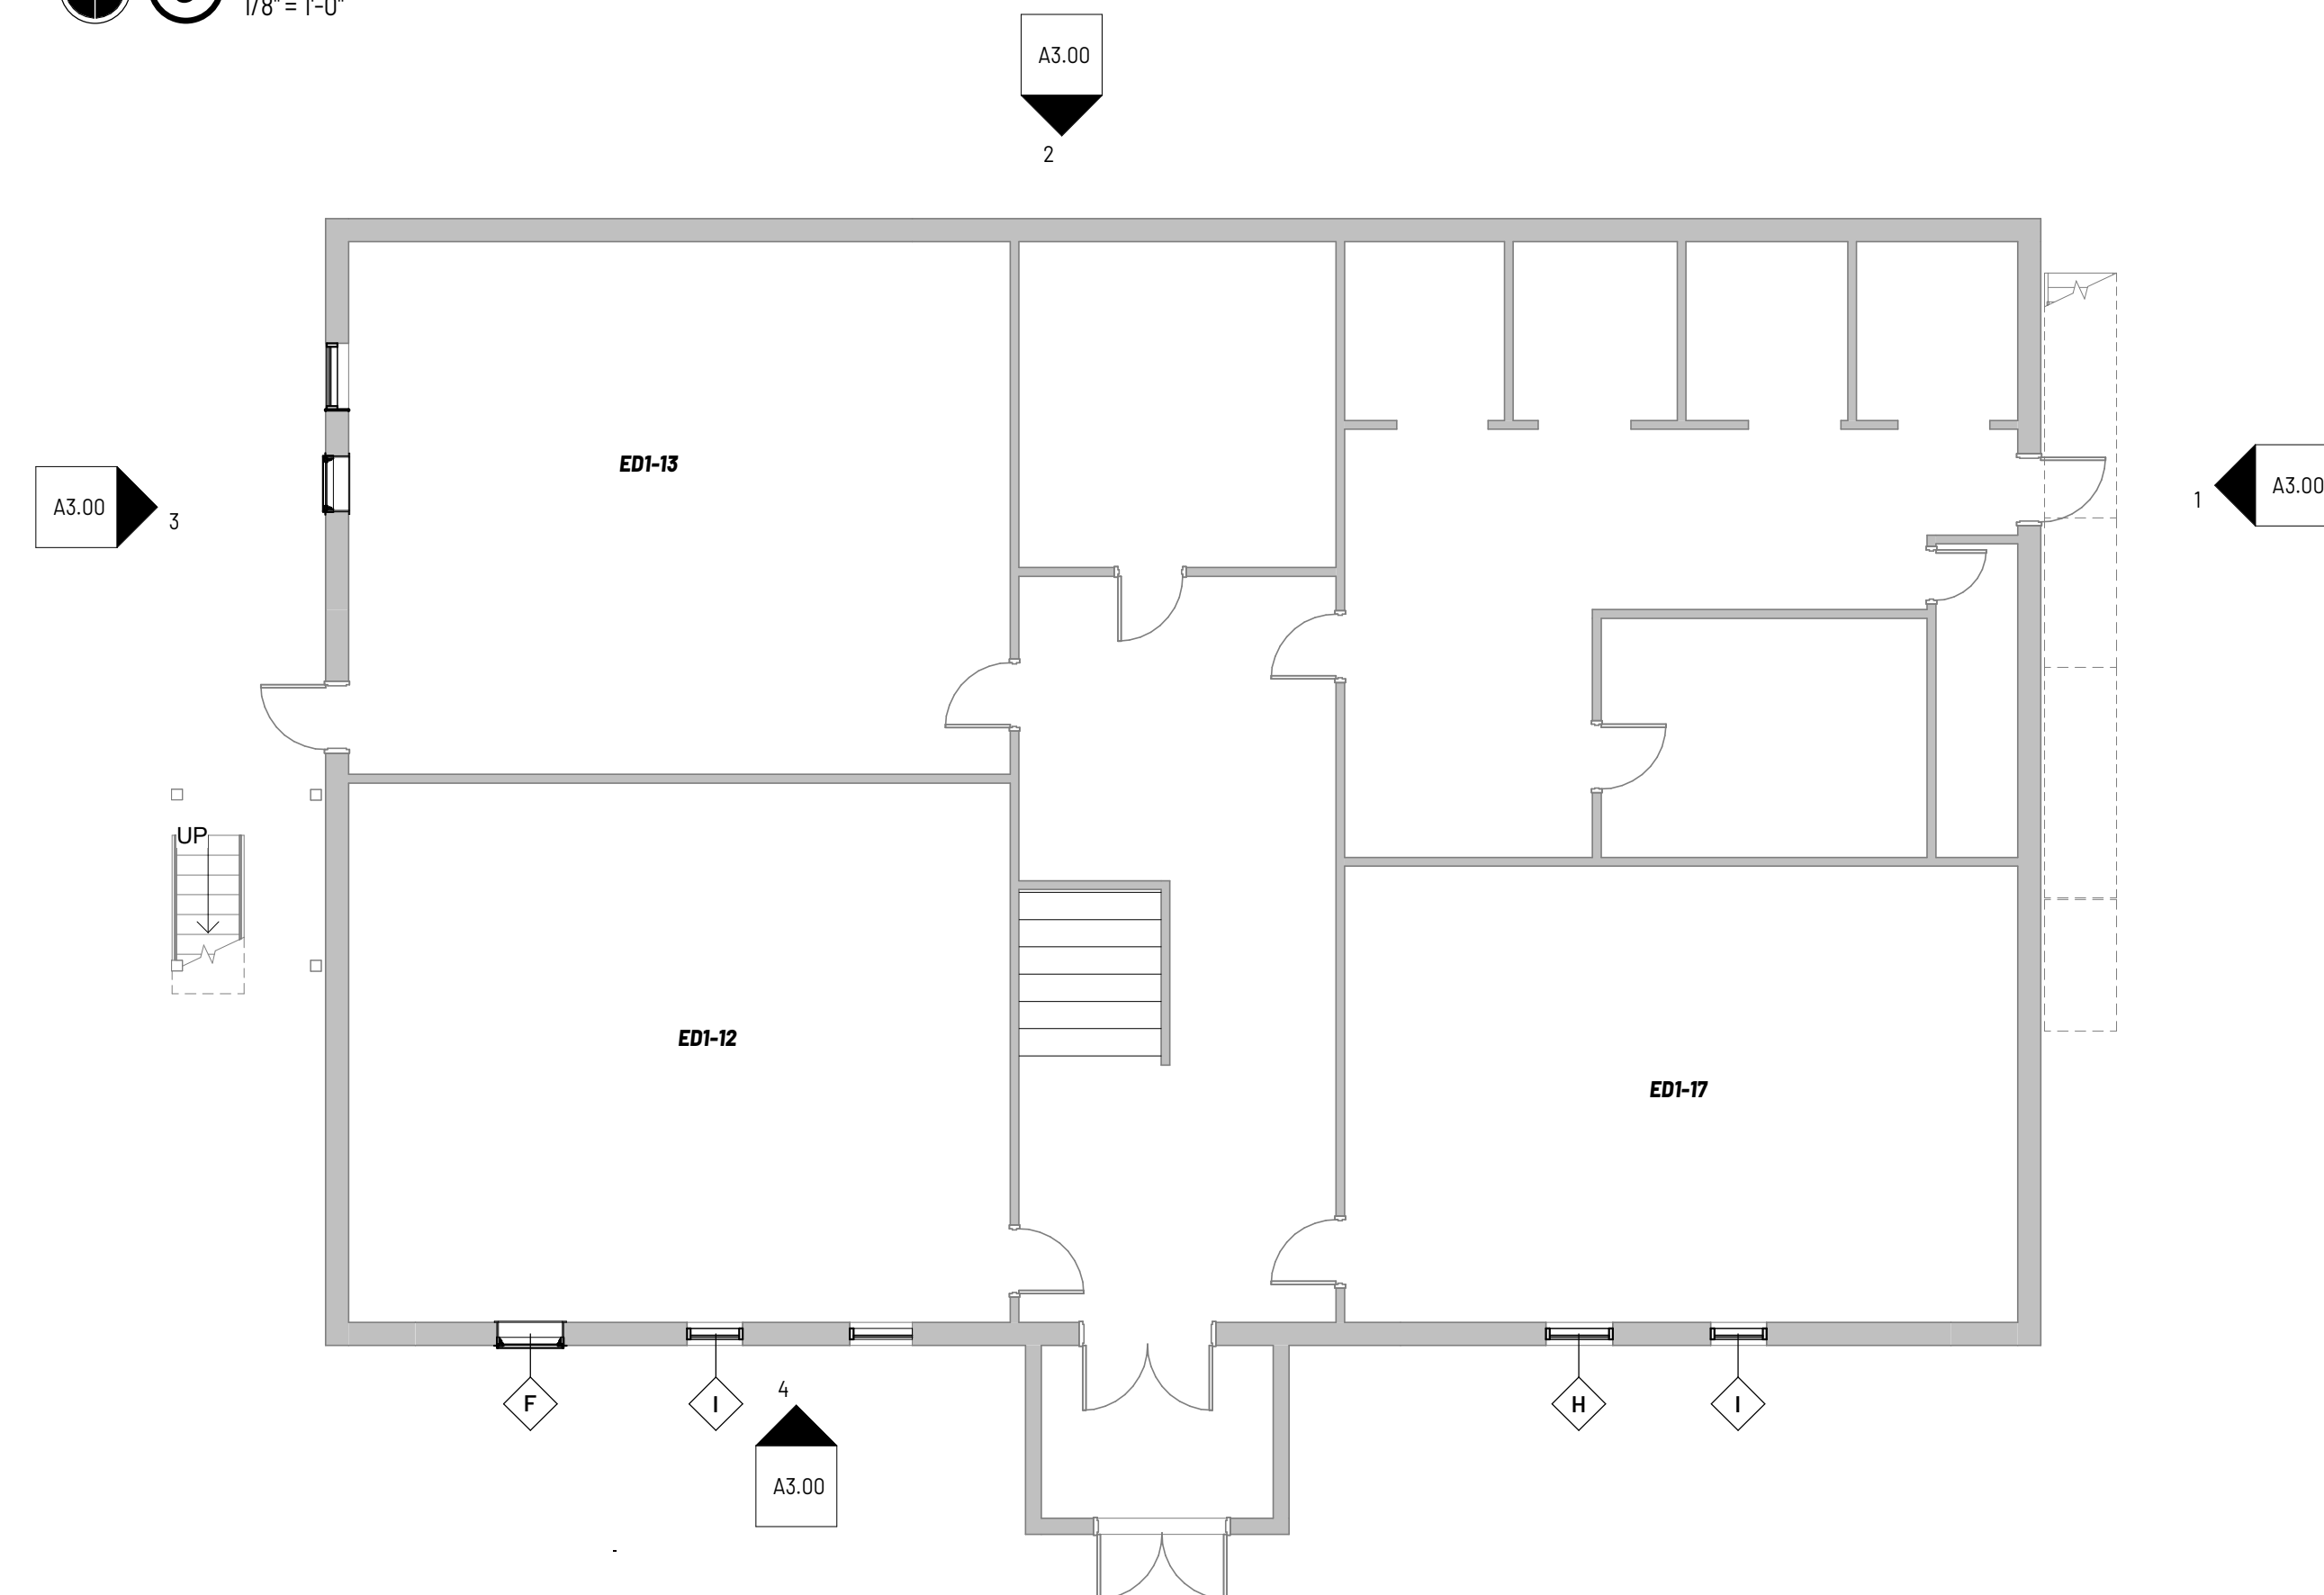

6 Floor 01
1/8" = 1'-0"

DEMO PLAN GENERAL NOTES

- A** DASHED LINES INDICATE DEMOLITION, NOT ALL ITEMS NOTED FOR CLARITY.
- B** EACH CONTRACTOR TO CAREFULLY EXAMINE EXISTING CONDITIONS PRIOR TO TIME OF BID.
- C** CONTRACTOR SHALL INFILL, OR PATCH AND REPAIR ANY OPENING IN EXISTING WALLS AS REQUIRED TO MAINTAIN EXISTING OR NEW RATED CONSTRUCTION.
- D** PATCH AND REPAIR EXISTING SURFACES, INDICATED TO REMAIN, DAMAGED DURING DEMOLITION. PREPARE FOR INSTALLATION OF NEW FINISHES AS SPECIFIED.
- E** PROTECT EXISTING FINISHES TO REMAIN.
- F** FINISHES AND OTHER ITEMS INDICATED FOR DEMOLITION SHALL BE ADEQUATELY REMOVED TO PROVIDE A SUITABLE SUBSTRATE FOR THE INSTALLATION OF PROPOSED MATERIALS AND FINISHES. MAINTAIN WEATHER TIGHT CONDITIONS ON ALL EXISTING SPACES THROUGHOUT CONSTRUCTION.
- G** OWNER WILL REMOVE ALL WINDOW COVERINGS
- H** OWNER WILL MOVE FURNITURE AND EQUIPMENT TO MAKE WAY FOR WORK TO BE PERFORMED
- I** COORDINATE PHASING OF DEMOLITION WITH OWNER ROOM BY ROOM REMOVE AND REPLACE ANY ROTTEN / COMPROMISED SUBSTRATES OR FRAMING.
- J** OWNER WILL REMOVE WINDOW AC UNITS AND FANS. OWNER WILL REINSTALL WINDOW AC AND FANS.

FLOOR PLAN GENERAL NOTES

- A** SEE SHEET TO.01 FOR ALL NOTES AND ABBREVIATIONS
- B** CONTRACTORS SHALL FIELD VERIFY ALL DIMENSIONS AND NOTIFY ARCHITECT OF ANY DISCREPANCIES PRIOR TO BEGINNING THE AFFECTED WORK.
- C** DO NOT SCALE DRAWINGS, FOLLOW DIMENSIONS.
- D** PATCH AND REPAIR EXISTING WALLS, FLOORS, CEILINGS, ETC., THAT ARE SHOWN TO REMAIN BUT ARE DAMAGED DUE TO CONSTRUCTION WORK. THIS SHALL INCLUDE REPAIRING FINISHES DAMAGED BY THE REMOVAL OR INSTALLATION OF NEW MECHANICAL, ELECTRICAL, OR FIRE PROTECTION WORK OR DEVICES.
- E** COORDINATE PHASING OF PLACING WINDOWS WITH OWNER ROOM BY ROOM.

KEYNOTES

- ① DEMO WINDOW AND ALL TRIM ITEMS
- ② PATCH AREA AROUND WINDOW - SEE ELEVATION 6/A3.00
- ③ WINDOW TO HAVE LEVER HANDLES FOR QUICK EXITING (TILT-AND-TURN) WINDOW TO SWING INWARD.
- ④ REMOVE AND REINSTALL STAIR AS REQUIRED TO INSTALL WINDOW.


REVISIONS

NO.	DESCRIPTION	DATE


IF THIS DRAWING IS NOT 30"x42" IT IS NOT TO SCALE

© COPYRIGHTED. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of reconstruction of this project or workbooks. Unauthorized copying, disclosure or construction use without written permission of Carson Moss Briggler & Associates is prohibited by copyright law.


FILED IN: 20260427 09:54 AM 0000 NCCF Education Building Window Replacement (02/25/26) DAS.DOC NCCF Window Replacement (02/25/26) 1/26/26 10:00 AM

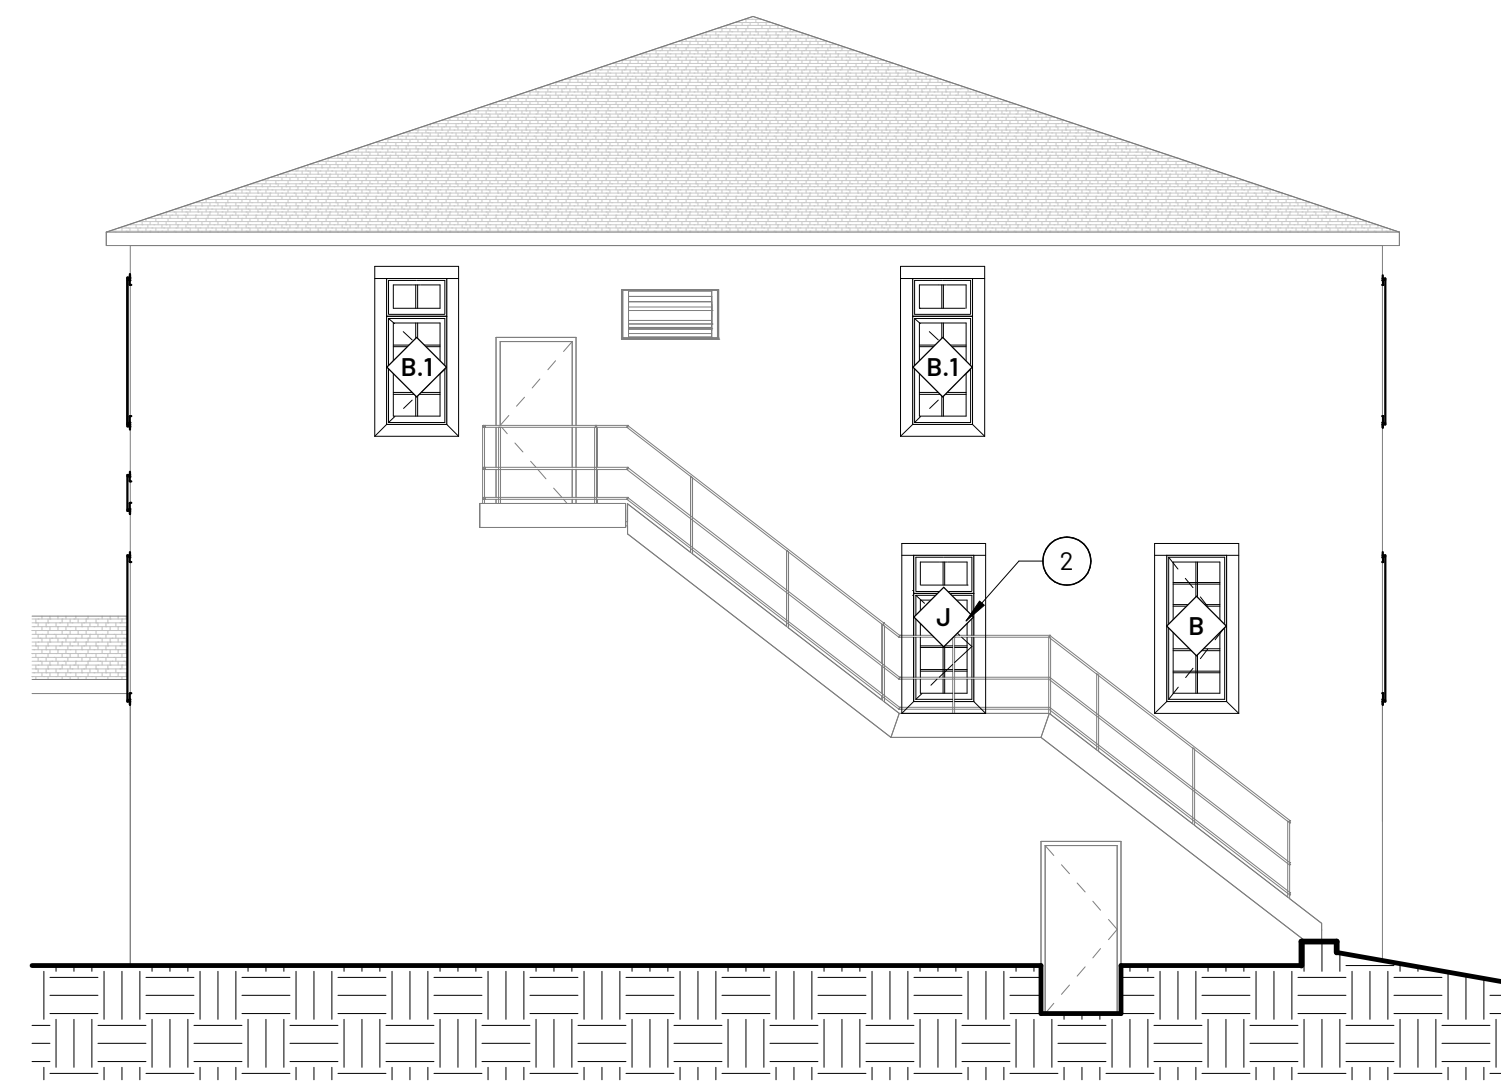


1 East
1/8" = 1'-0"

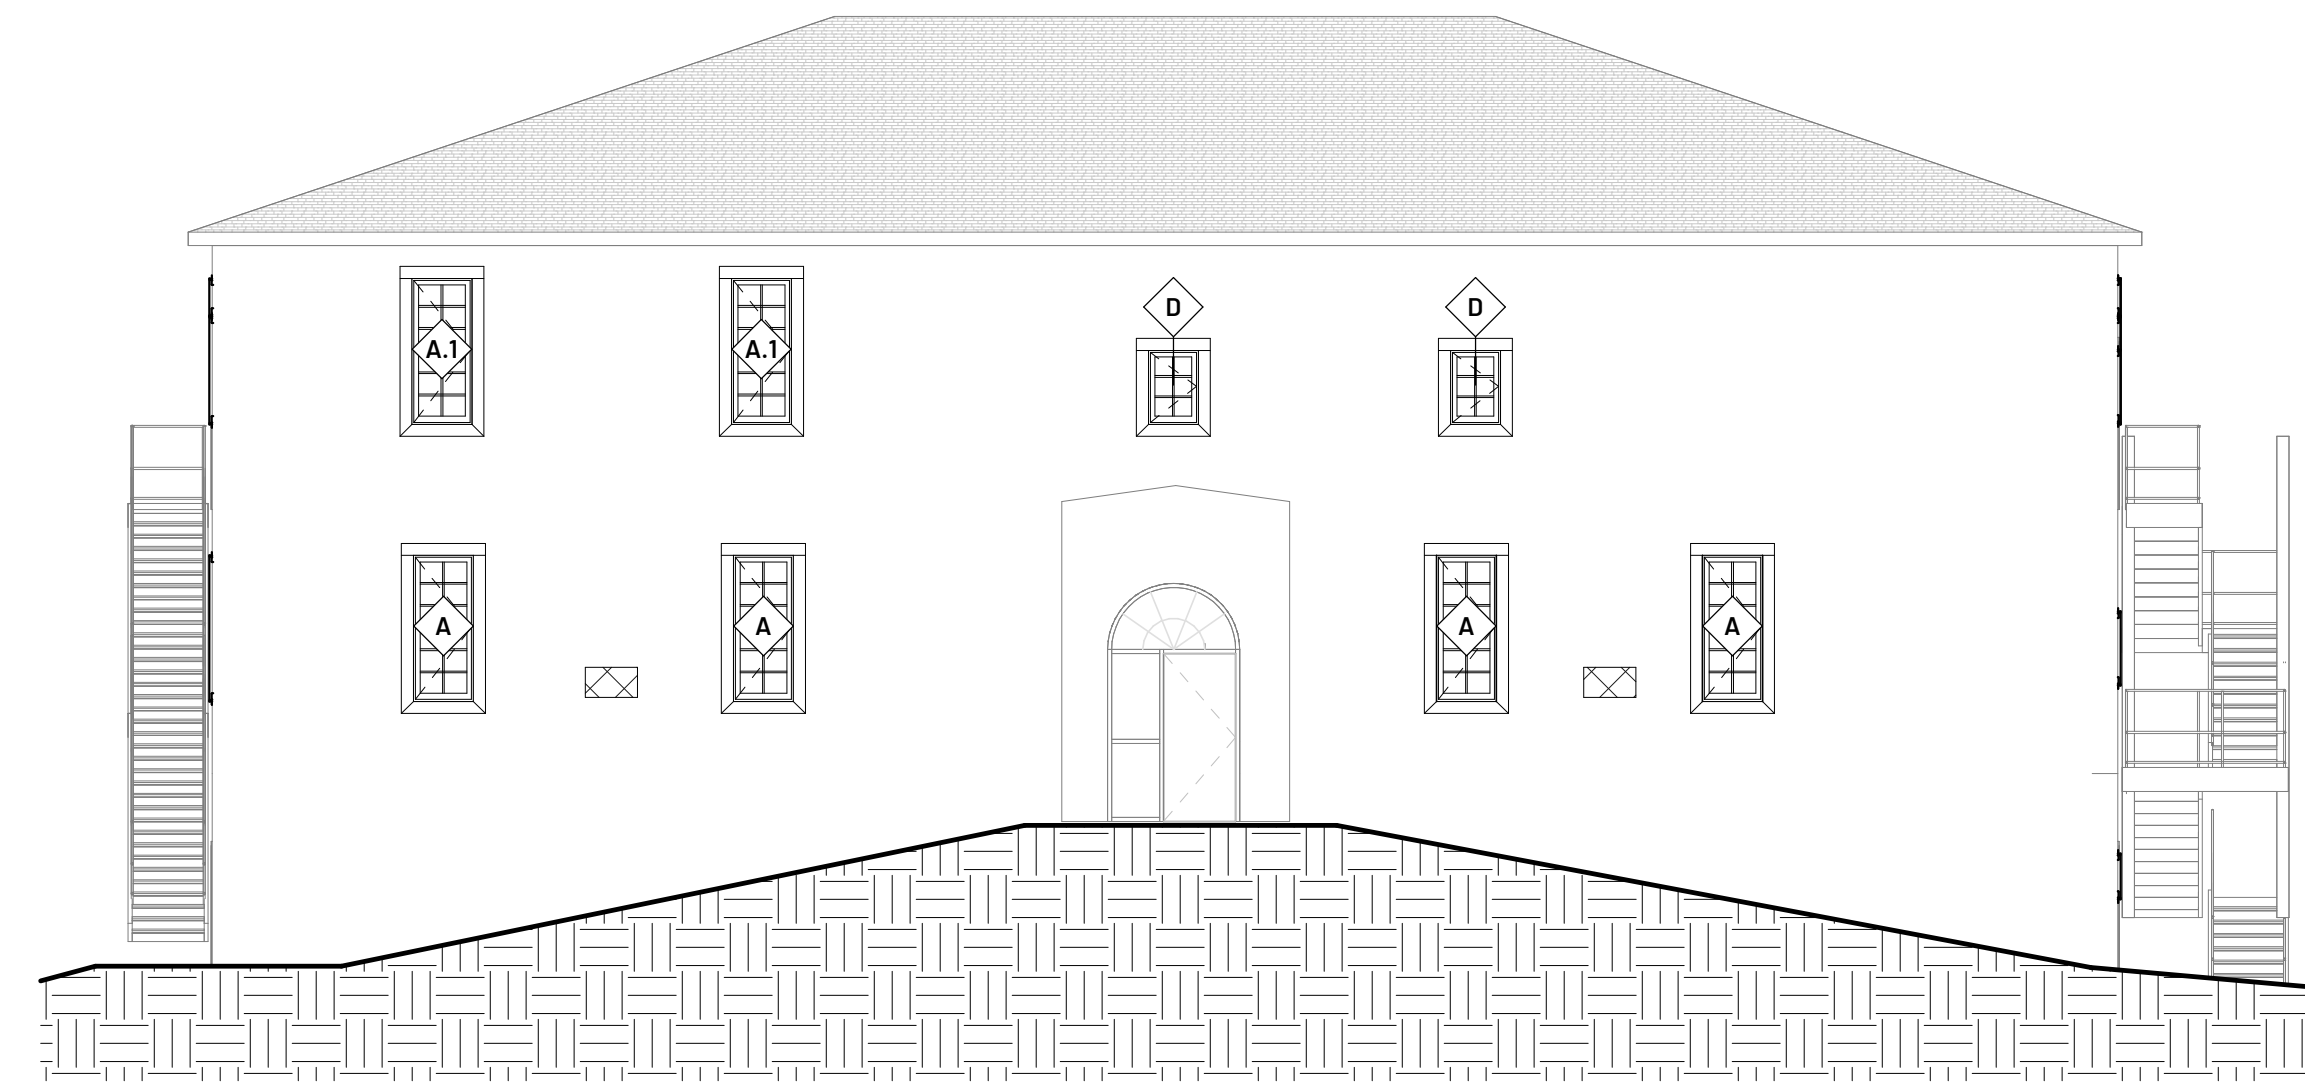

2 North
1/8" = 1'-0"

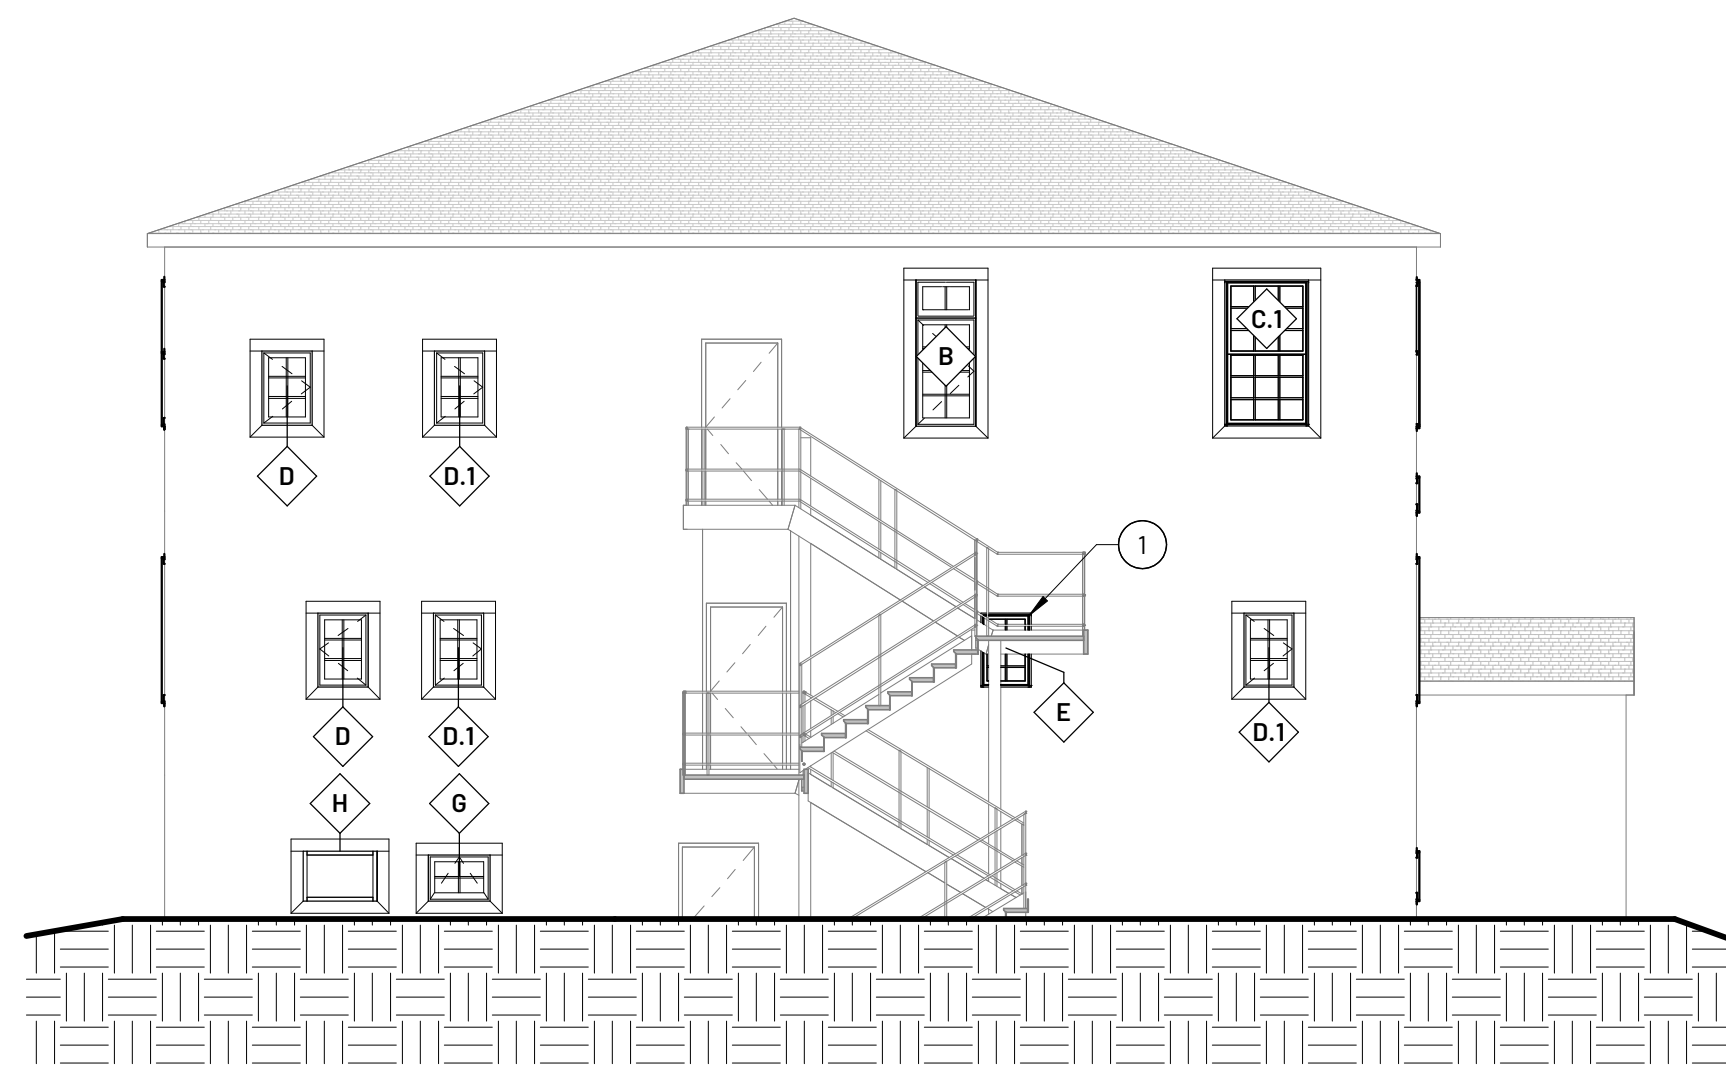

3 West
1/8" = 1'-0"

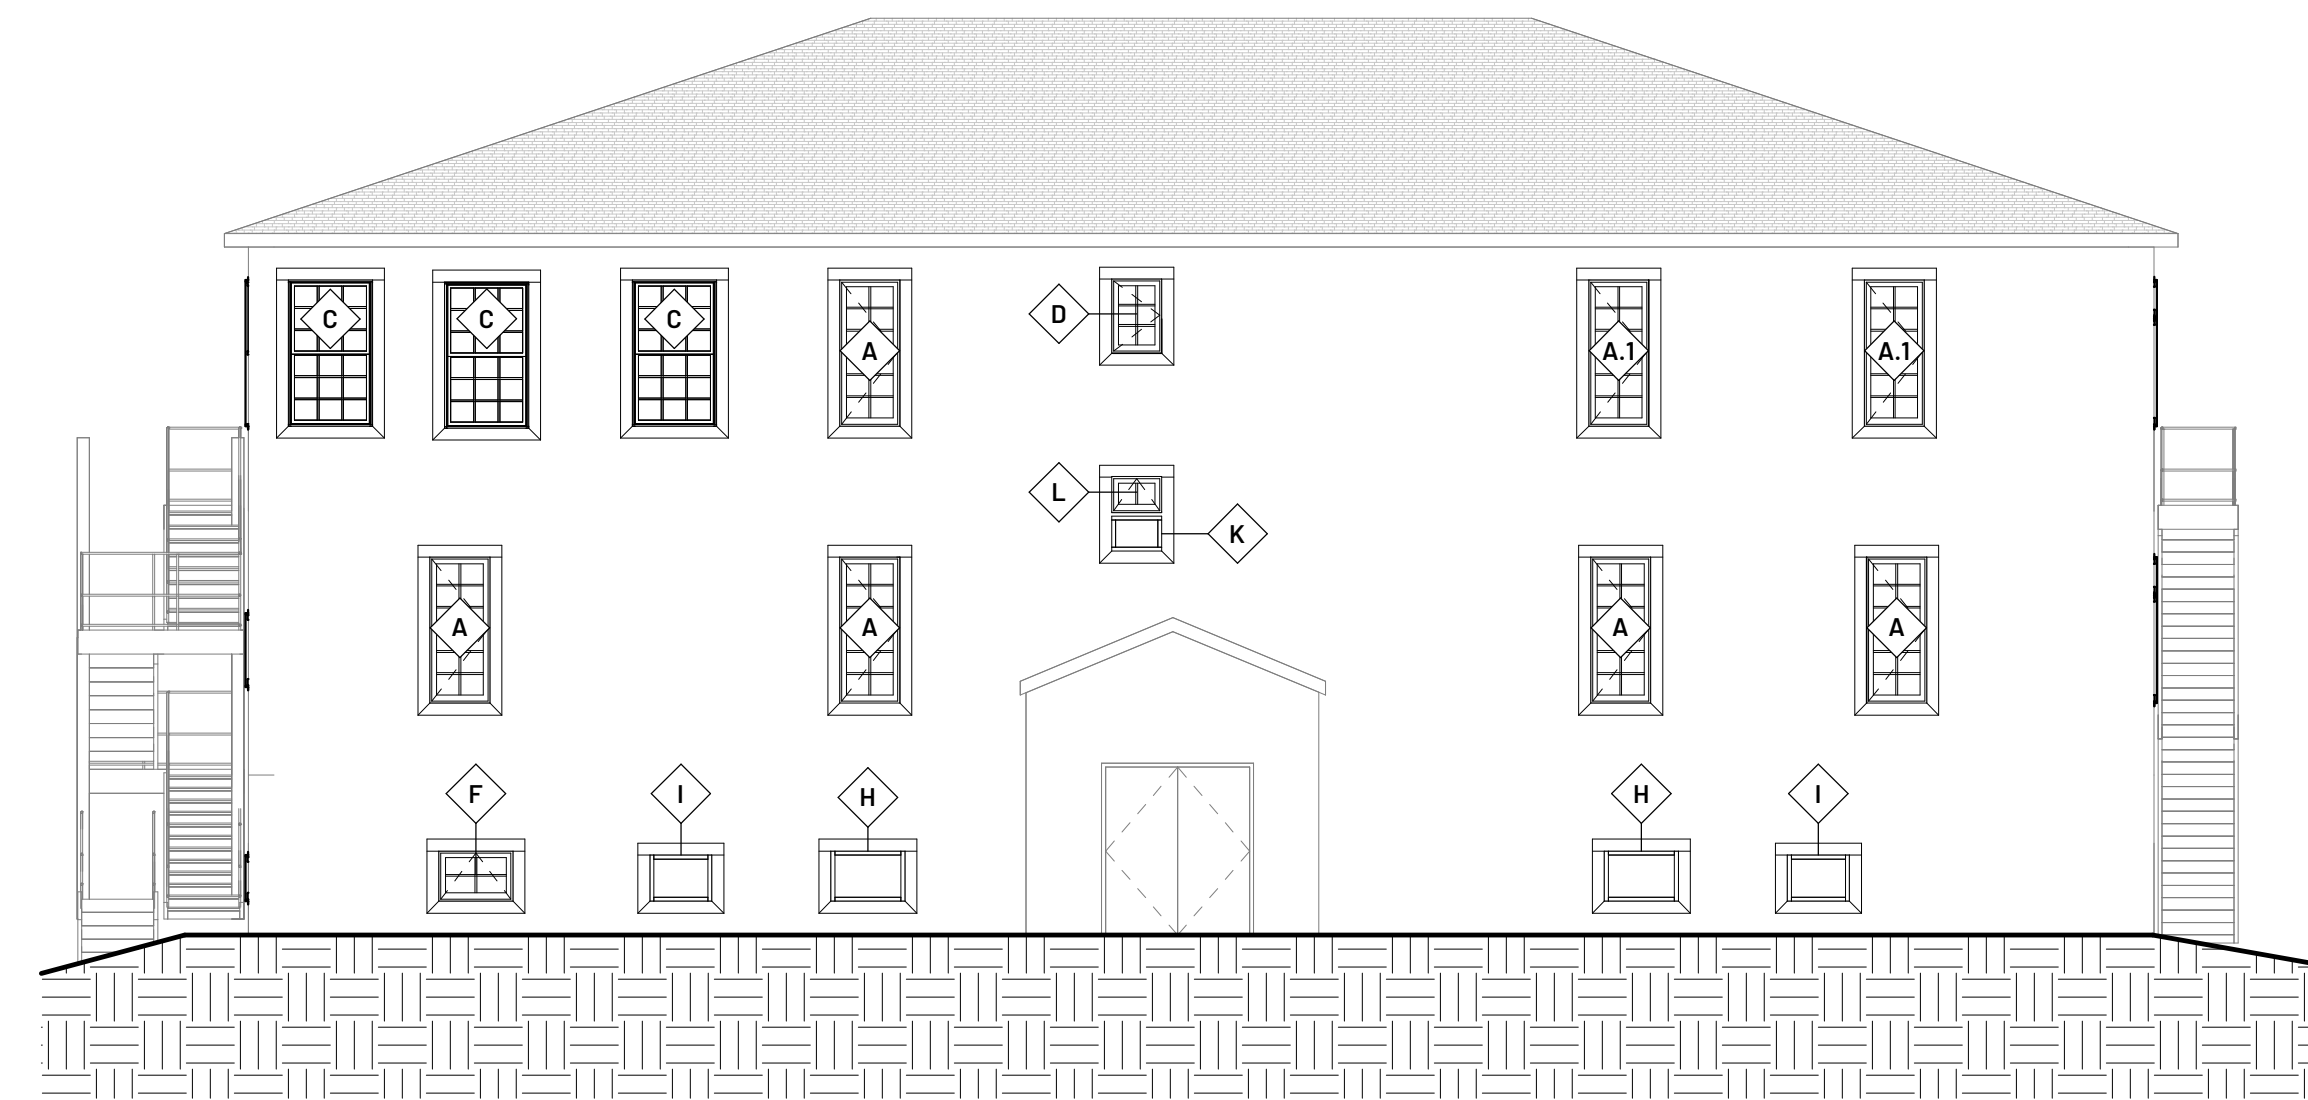

4 South
1/8" = 1'-0"



GENERAL NOTES


- A** MECHANICAL AND ELECTRICAL EQUIPMENT AND COMPONENTS ARE ILLUSTRATED FOR CONTEXT AND COORDINATION PURPOSES ONLY. SEE MECHANICAL AND ELECTRICAL DOCUMENTS.
- B** PROVIDE PROPER ANCHORAGE OF ALL WALL-ATTACHED ITEMS MAINTAINING THE CONTINUITY OF THE COMPLETE AIR/MOISTURE BARRIER.
- C** ALL EXTERIOR WALL ASSEMBLIES SHALL BE PROPERLY FLASHED AND SEALED WEATHER-TIGHT.
- D** ENSURE ALL WEEPS, THRU-WALL FLASHING AND OTHER DRAINAGE CAVITIES REMAIN OPEN TO ALL LOW CONDENSATION AND MOISTURE TO ESCAPE. SEALANT SHALL BE APPLIED TO THE UNDERSIDE OF ALL FLASHING AND DRIPS.
- E** EIFS TRIM TO BE PAINTED TO MATCH THE ADJACENT EXISTING EIFS COLOR.
- F** EXTERIOR STAIRS TO REMAIN CLEAR AT ALL TIMES FOR EXITING PURPOSES.

KEYNOTES


- 1** PREP WINDOW WITHOUT NAILING FLANGE AS NEEDED.
- 2** WINDOW TO HAVE LEVER HANDLES FOR QUICK EXITING (TILT-AND-TURN) WINDOW TO SWING INWARD.
- 3** COMPOSITE TRIM
- 4** SOLID SURFACE SILL
- 5** BISCUIT JOIN AND GLUE JOINTS TOGETHER

LEGEND


-  EXISTING WALL MOUNTED AIR CONDITIONER TO REMAIN
-  REMOVE AND REPLACE DAMAGED WALL PLASTER.
- REPLACE WITH GYPSUM BOARD.
- TEXTURE TO MATCH EXISTING WALL.
- PRIME ONLY, OWNER WILL PAINT

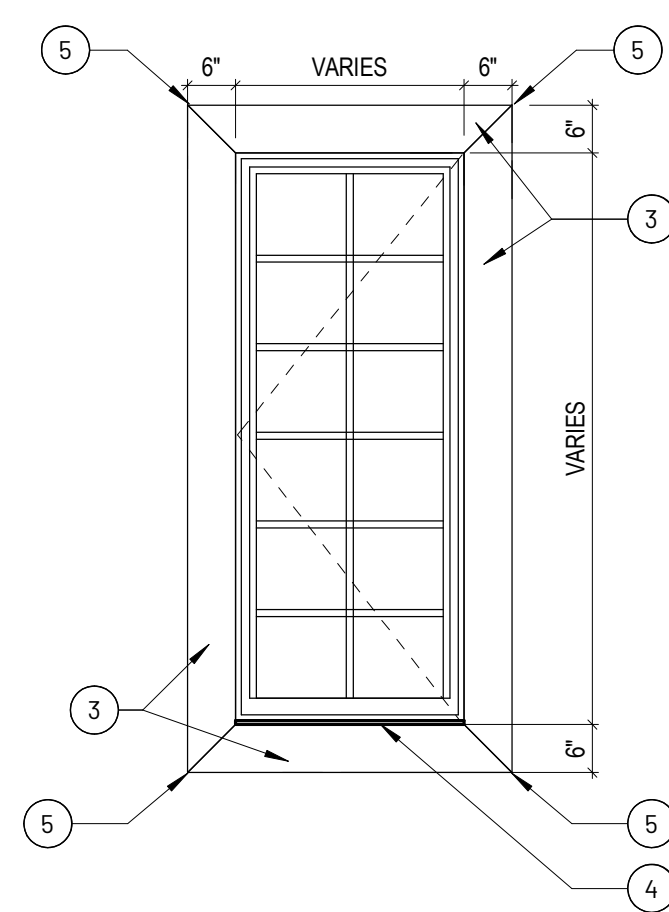

5 TYP. INTERIOR TRIM
1/2" = 1'-0"

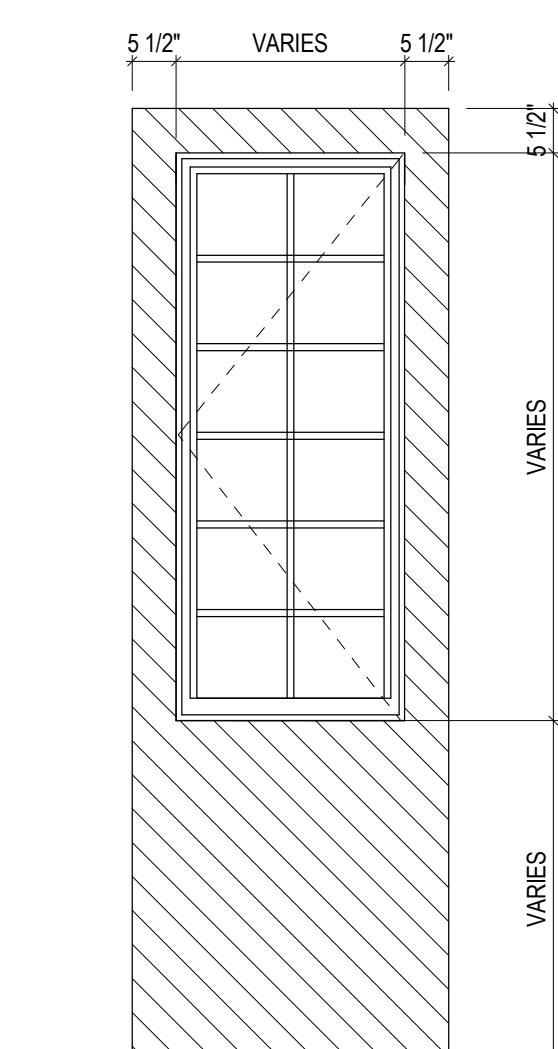

6 TYP. INTERIOR PATCH
1/2" = 1'-0"

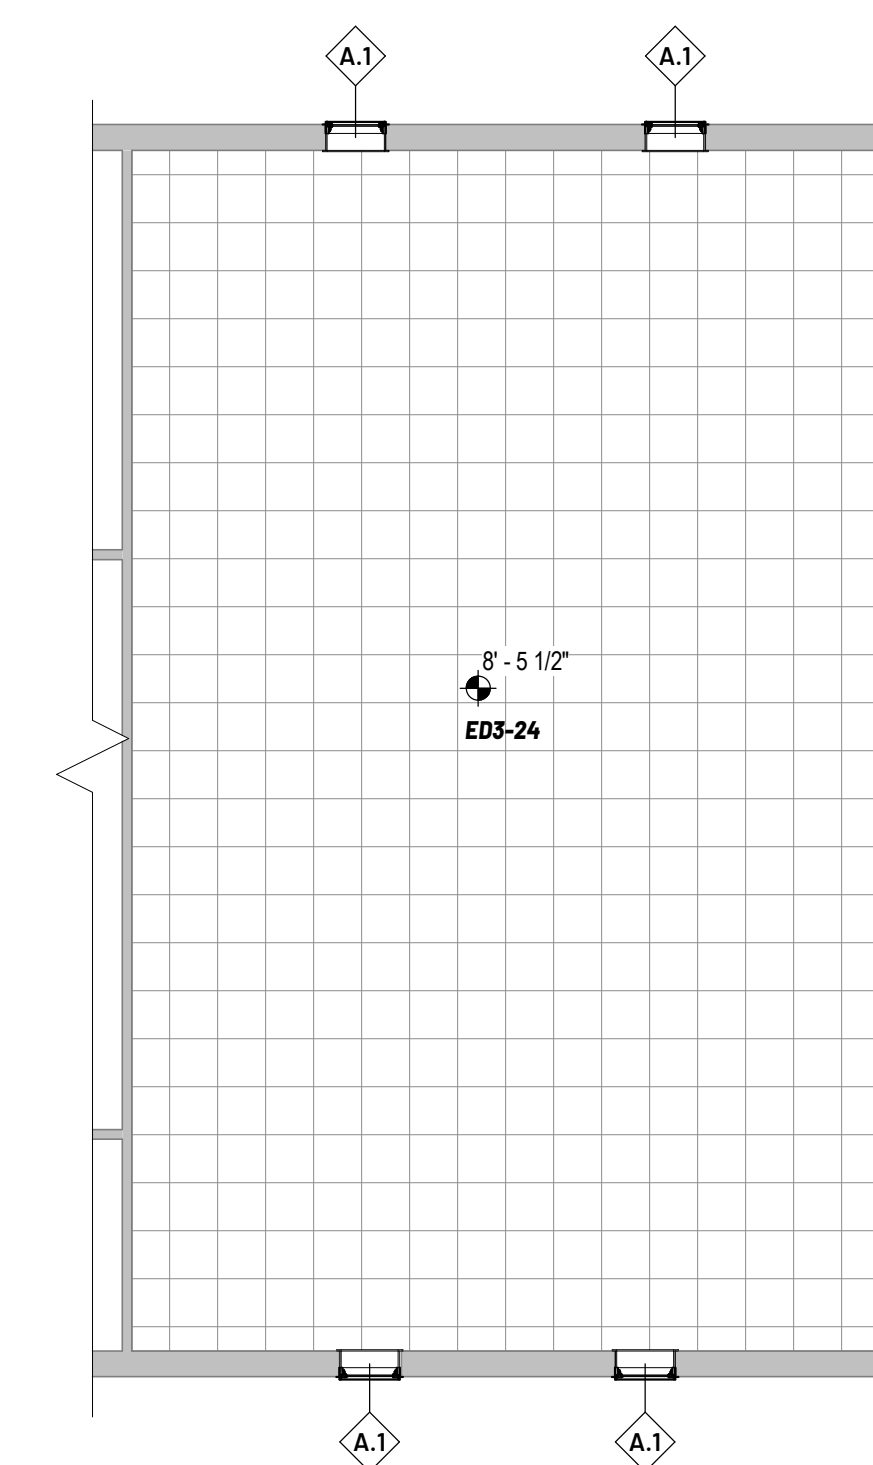

7 FLOOR 3 - RCP
1/8" = 1'-0"

REVISIONS

NO.	DESCRIPTION	DATE


IF THIS DRAWING IS NOT 30"x42" IT IS NOT TO SCALE

©2019/2020. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of reconstruction of this project or work item. Unauthorized copying, disclosure or construction use without written permission of Carson Ross Brygger & Associates is prohibited by copyright law.




FILED IN: I:\Projects\2025\25000 - NCCF Education Building Window Replacement\25000 - NCCF Window Replacement\25000 - NCCF Window Replacement.dwg
DATE: 04/27/2026 10:48 AM


WINDOWS

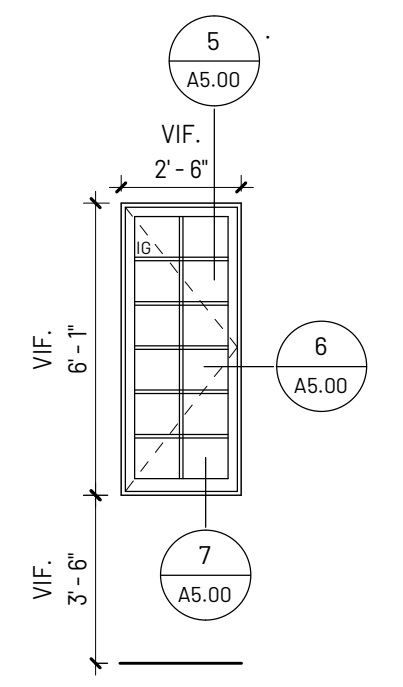


WINDOW A

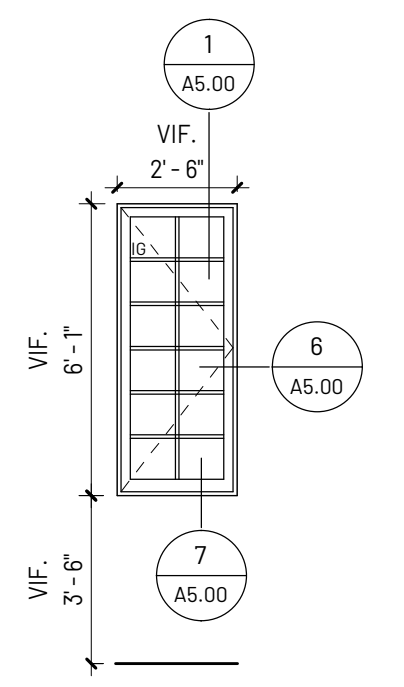


WINDOW A.1

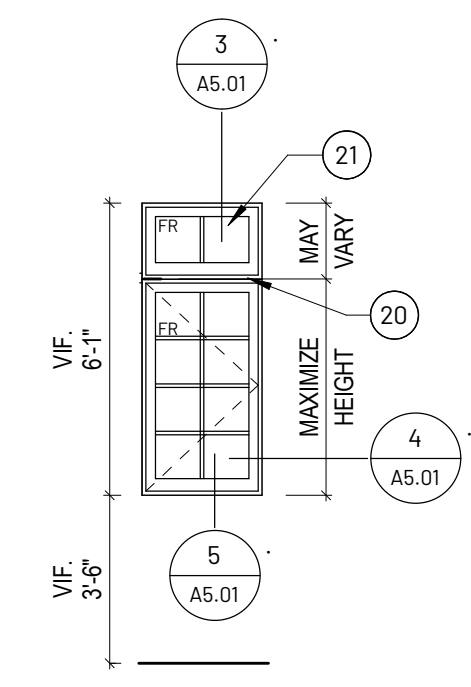


FIRE RATED WINDOW B

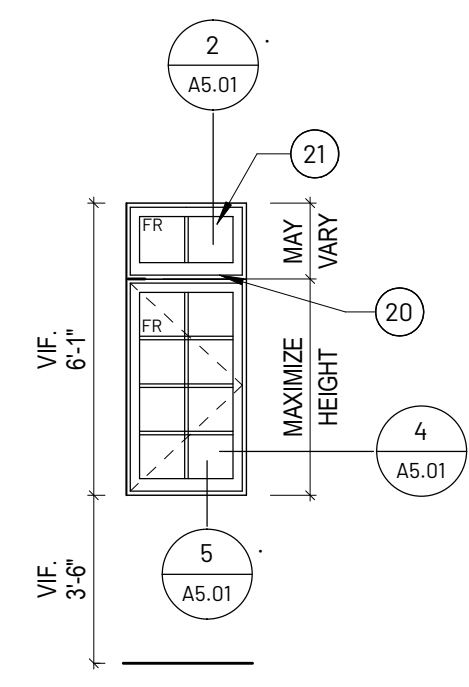


FIRE RATED WINDOW B.1

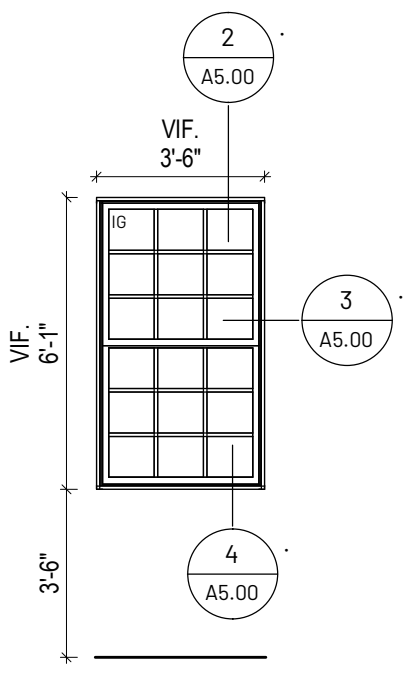


WINDOW C

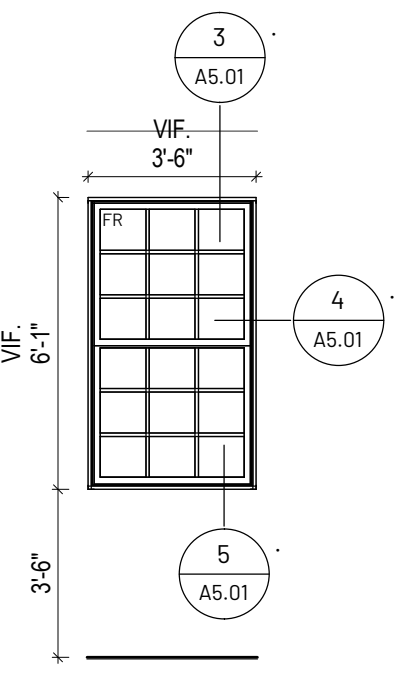


FIRE RATED WINDOW C.1

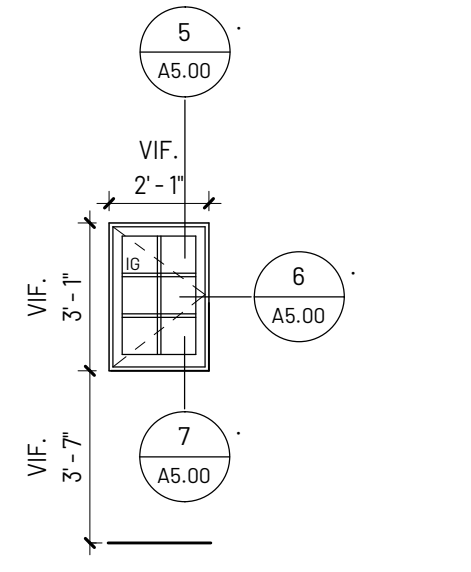


WINDOW D

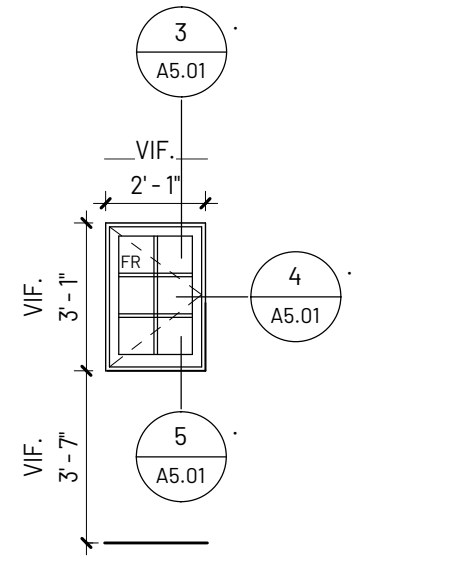


FIRE RATED WINDOW D.1

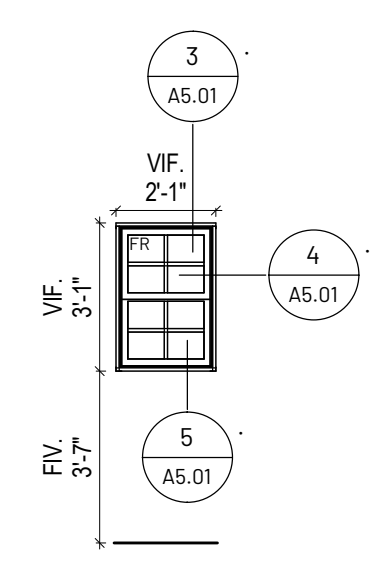


FIRE RATED WINDOW E

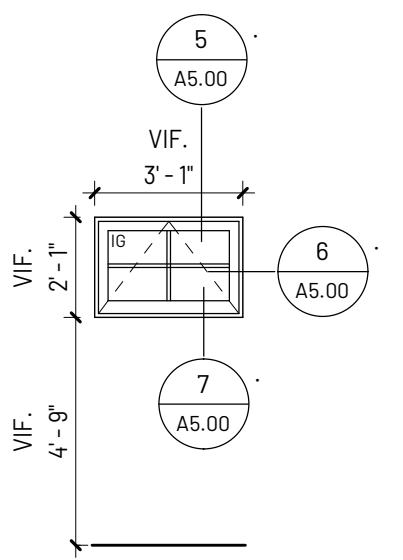


WINDOW F

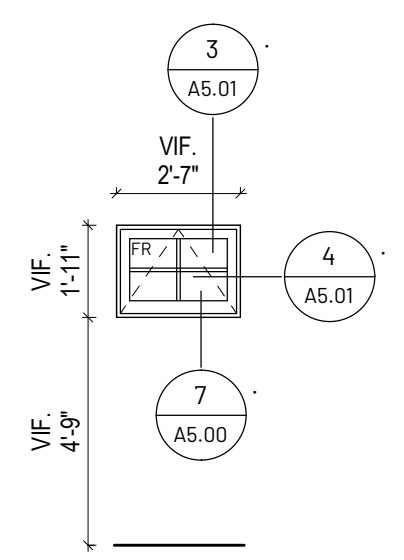


FIRE RATED WINDOW G

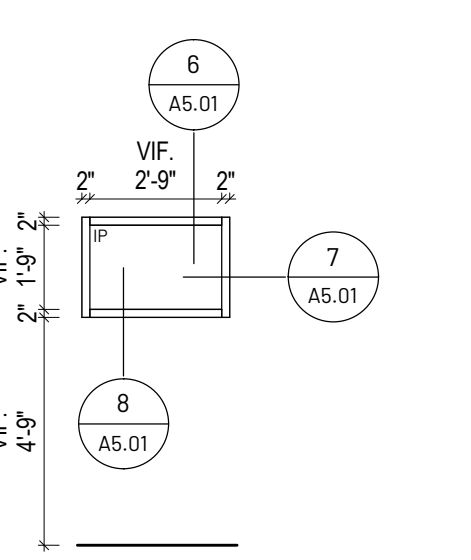


WINDOW H

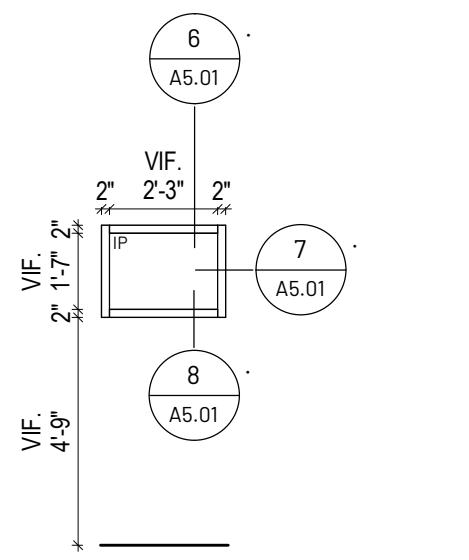


WINDOW I

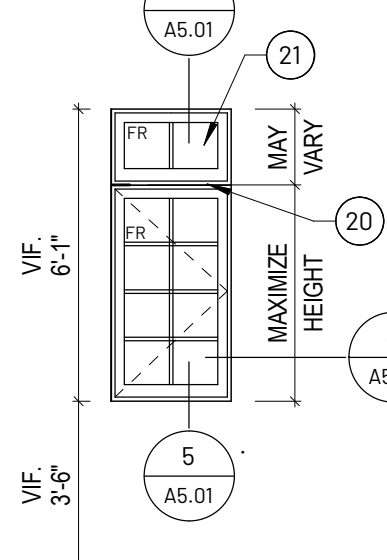


EGRES-FIRE RATED WINDOW J

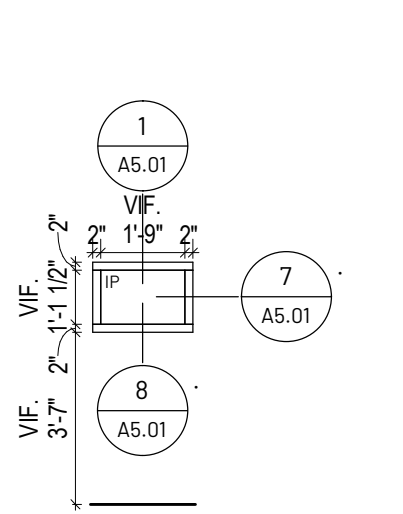


WINDOW K

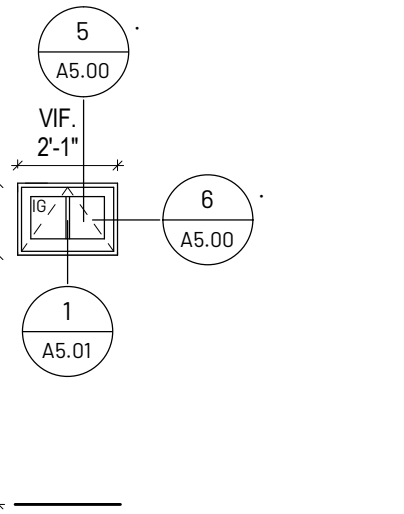


WINDOW L

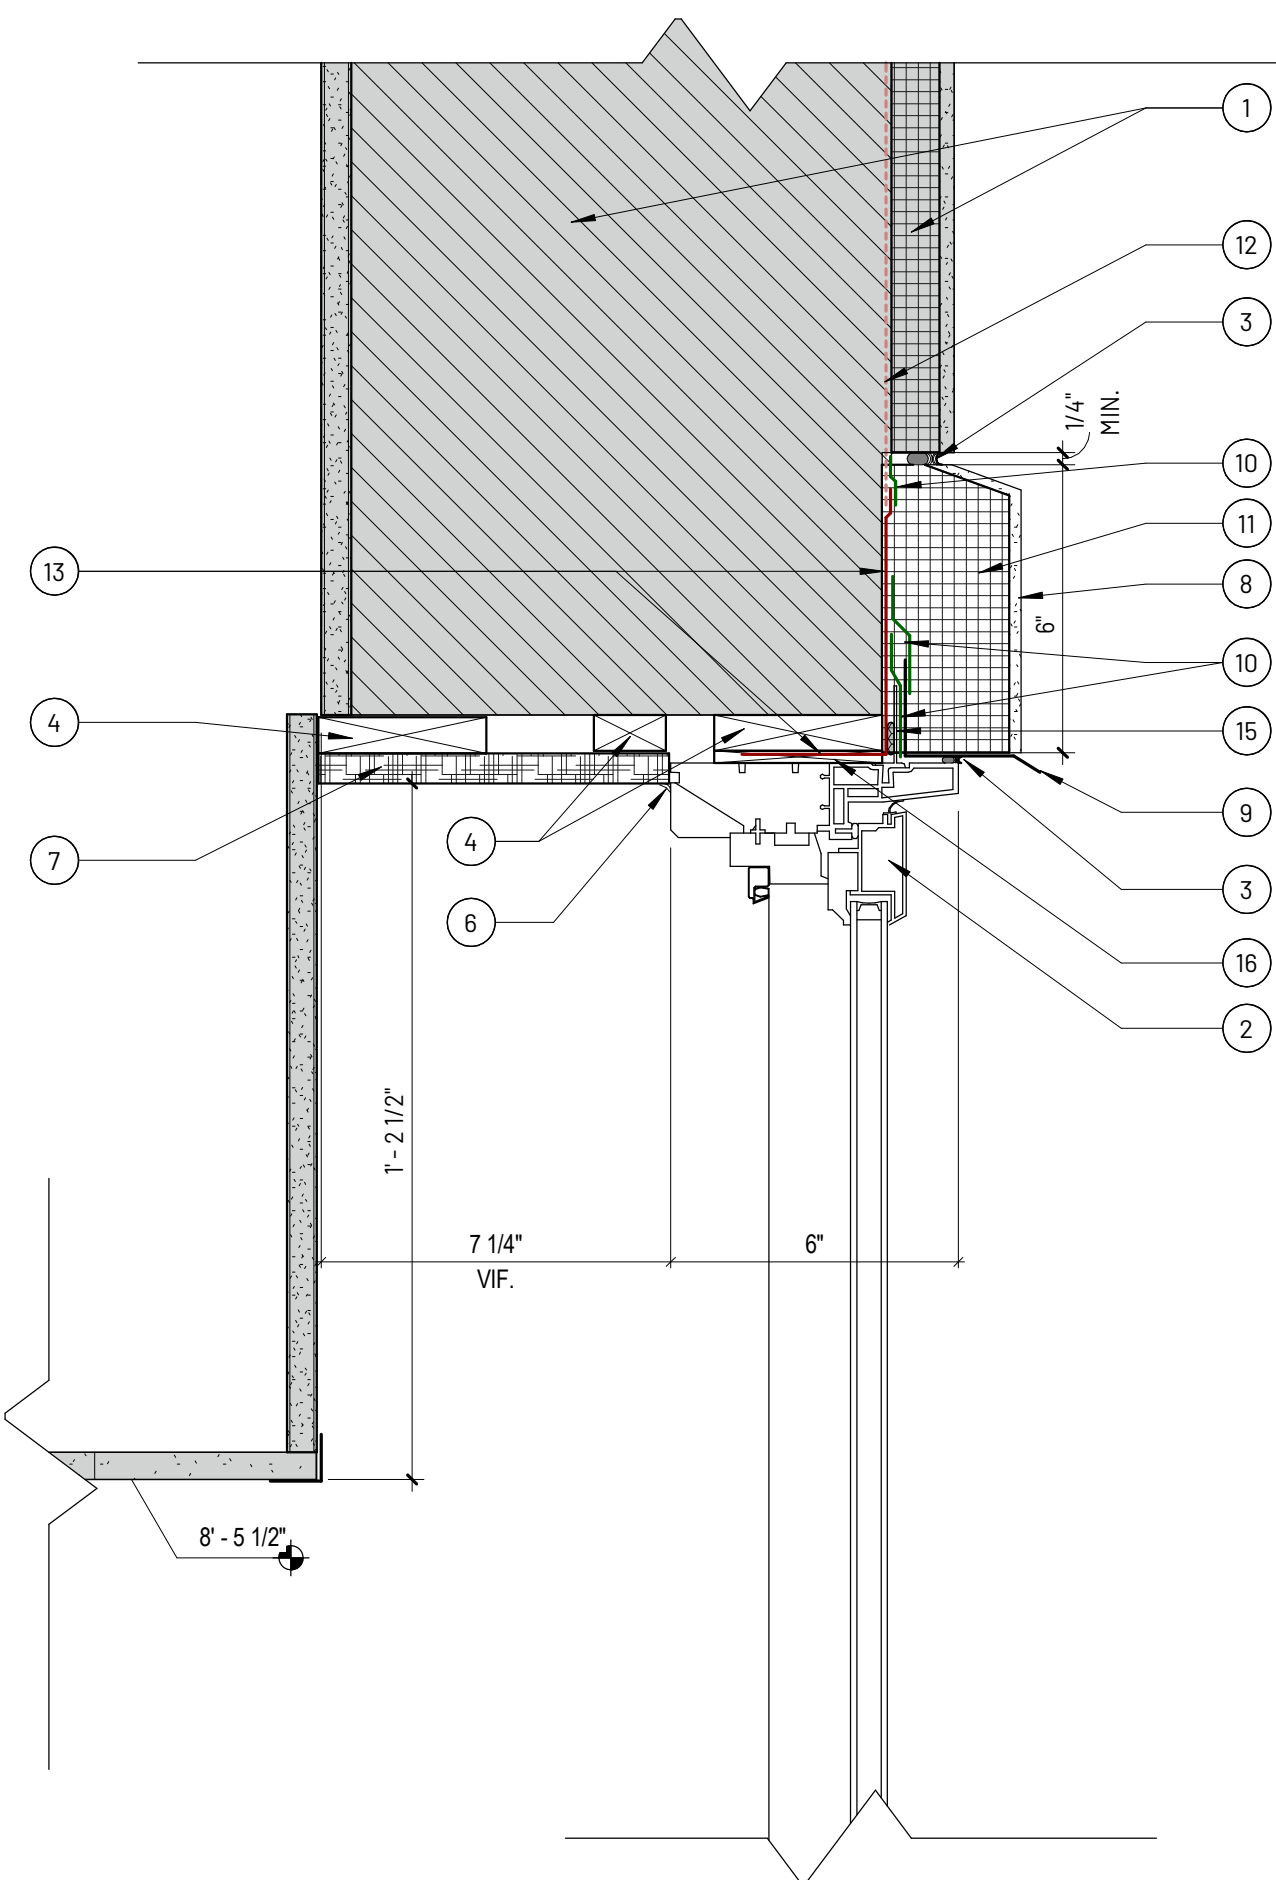


A.1 HEAD
3" = 1'-0"

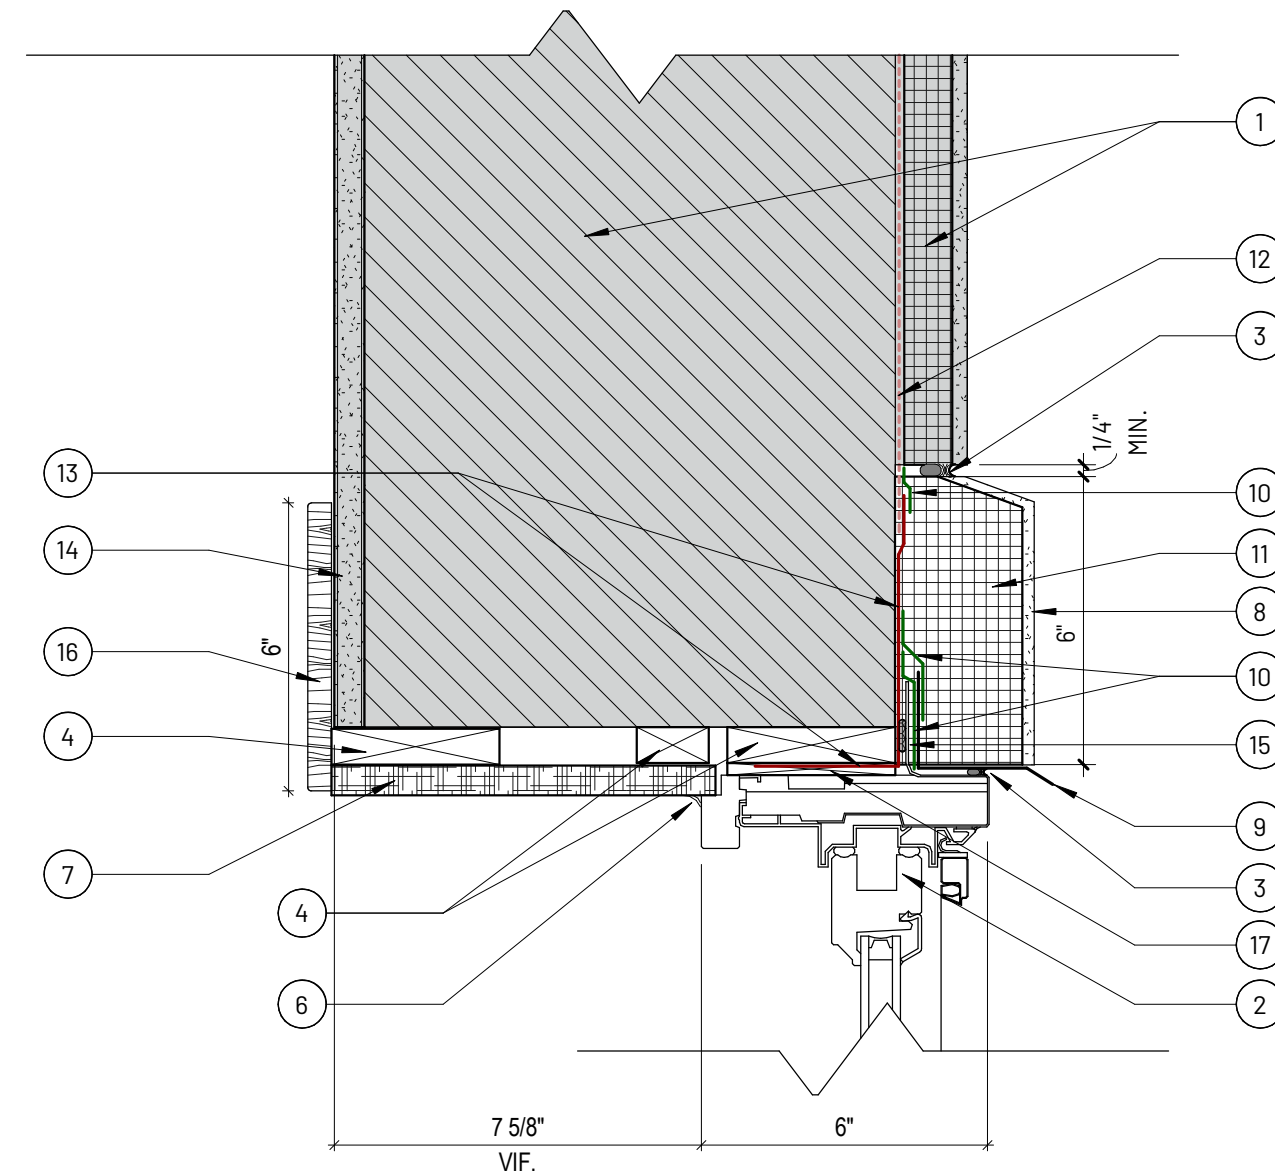


2 HEAD
3" = 1'-0"

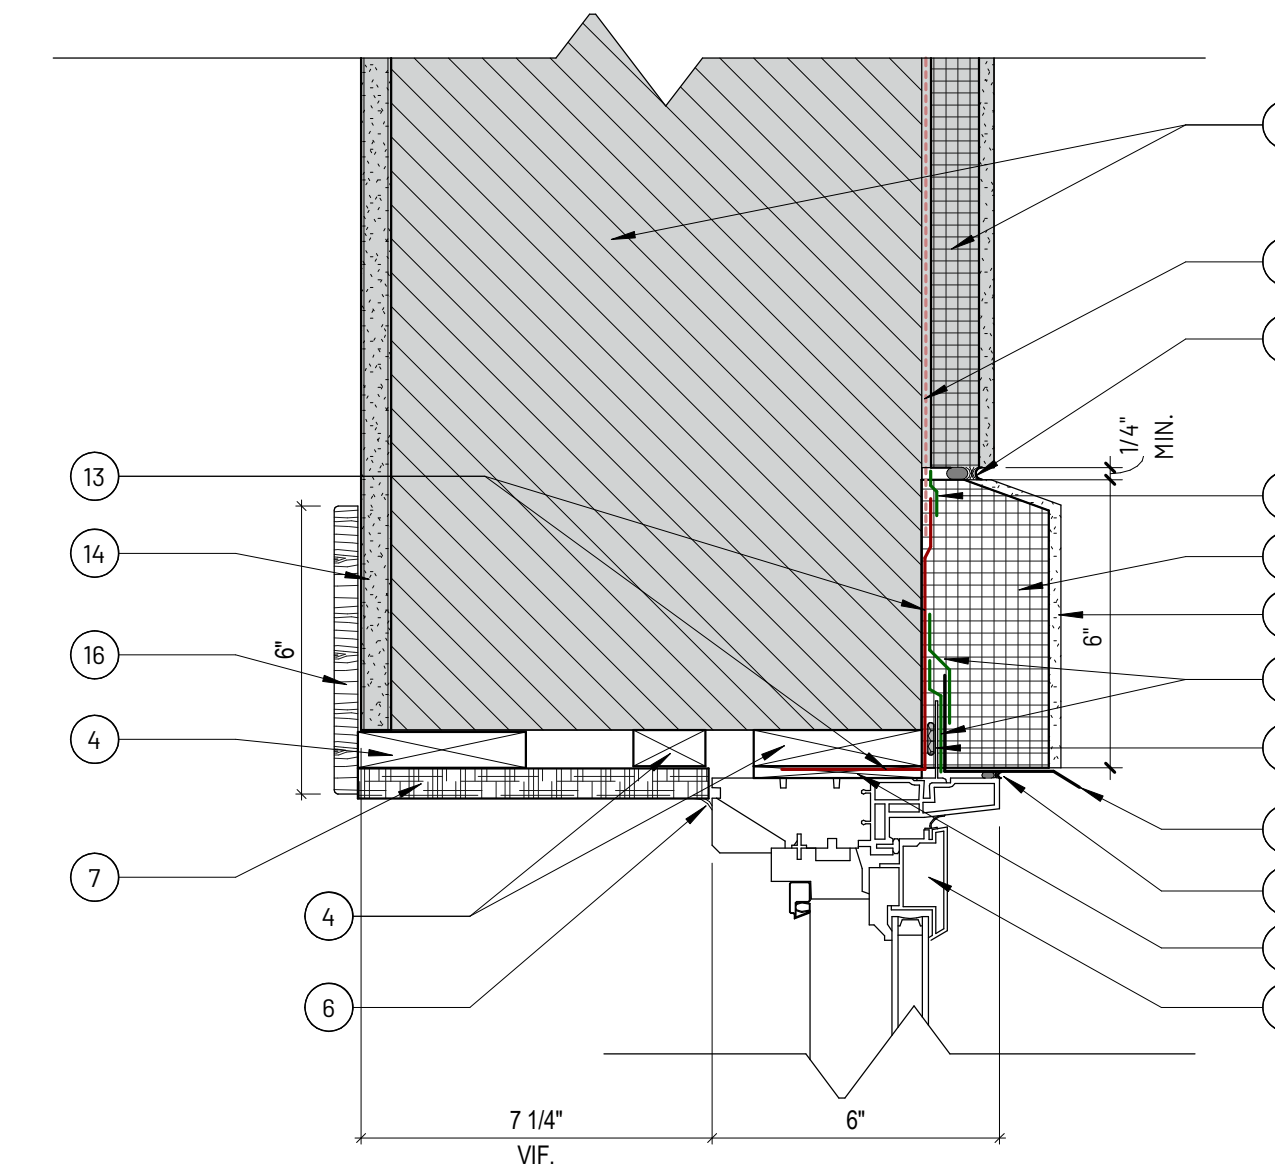


5 HEAD
3" = 1'-0"

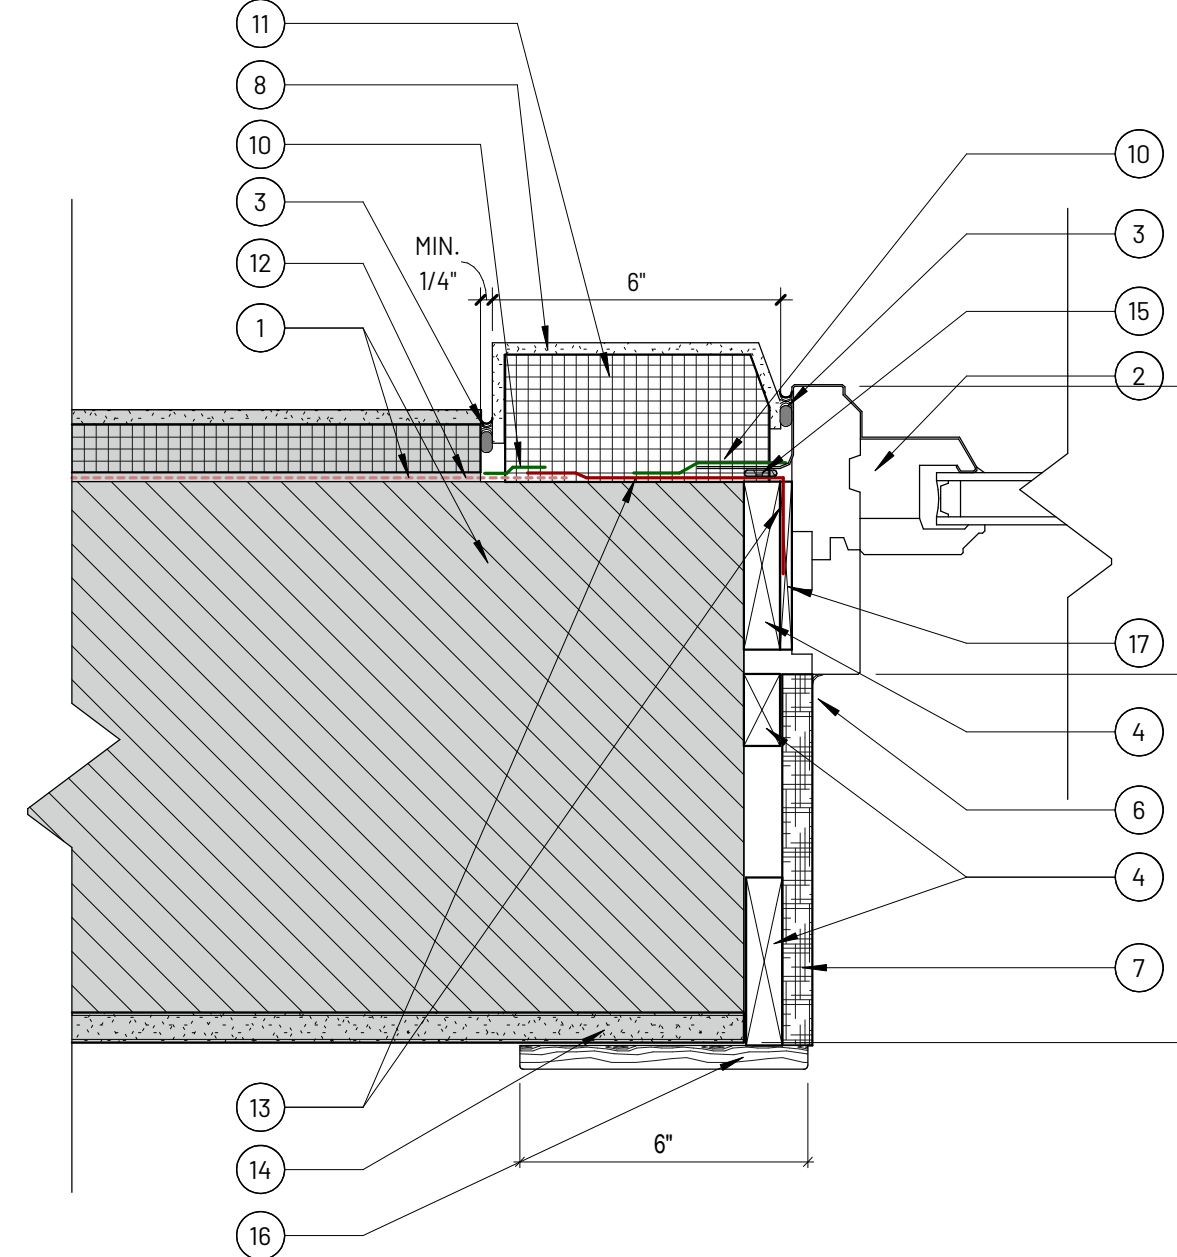


3 JAMB
3" = 1'-0"

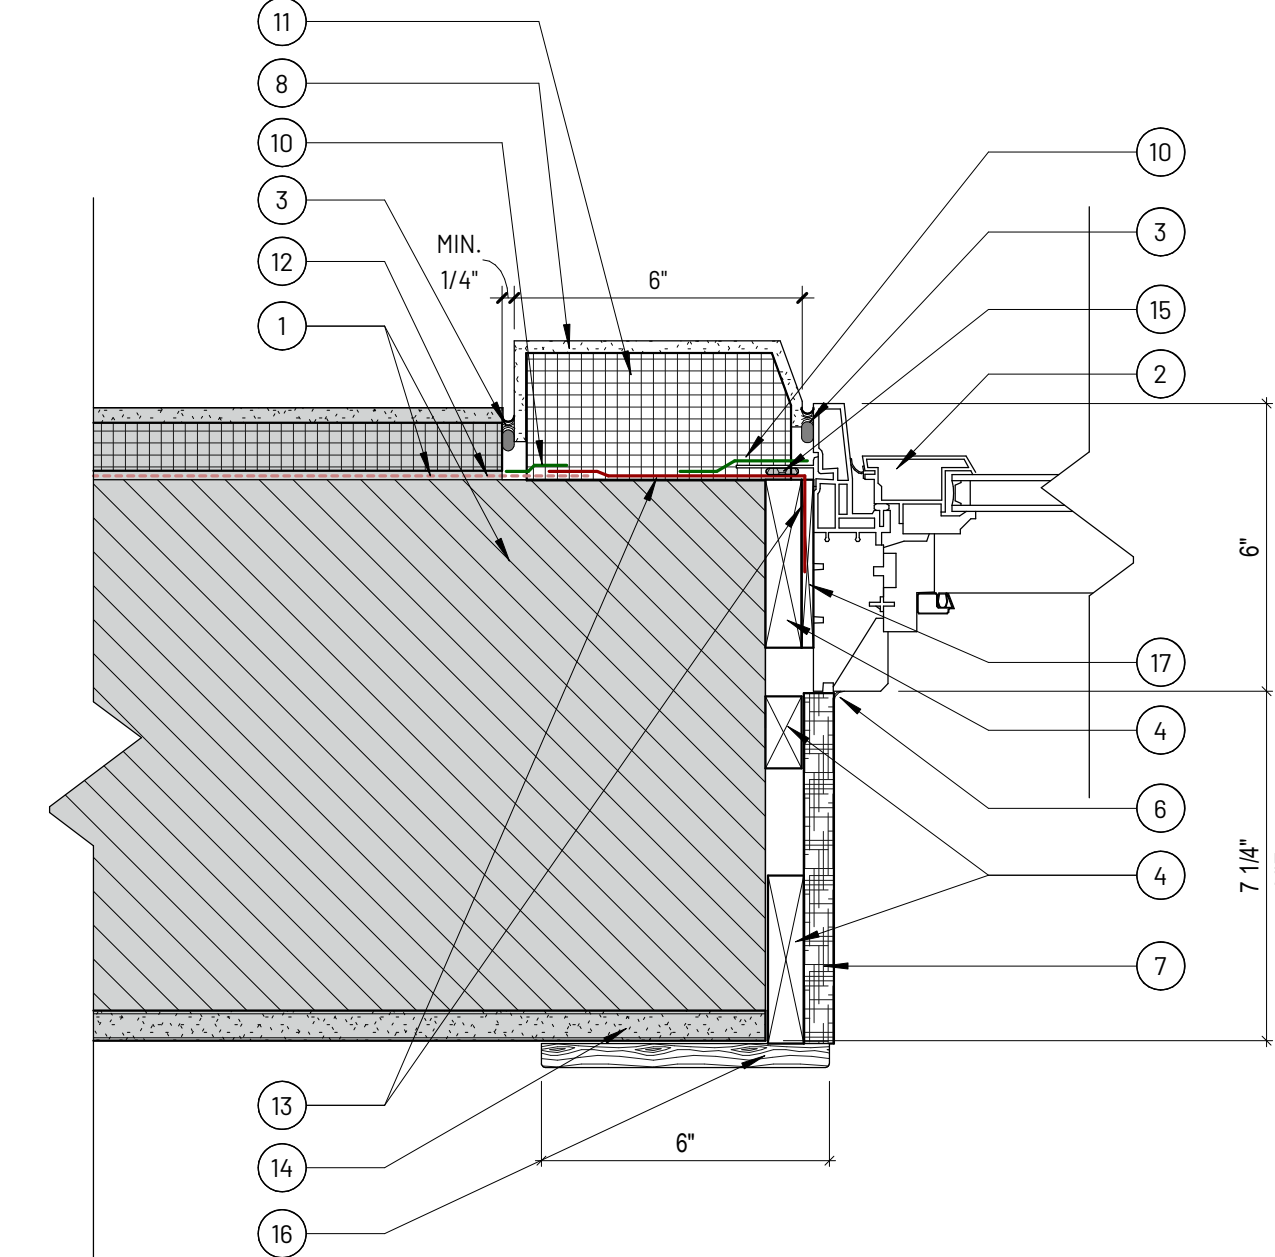

6 JAMB
3" = 1'-0"

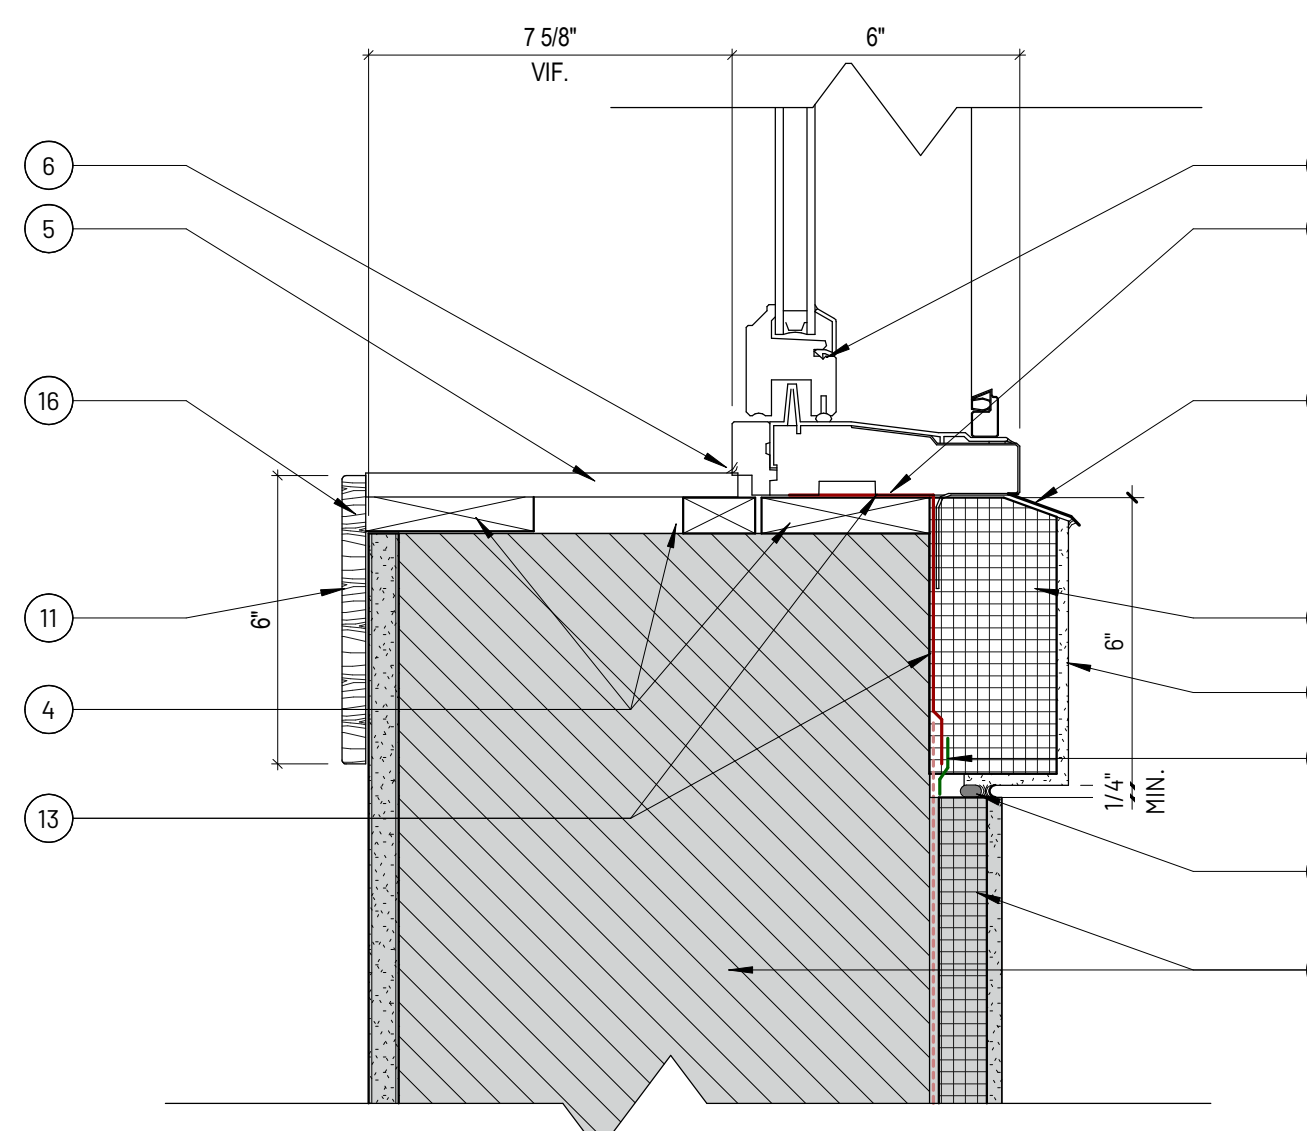

4 Detail 3
3" = 1'-0"

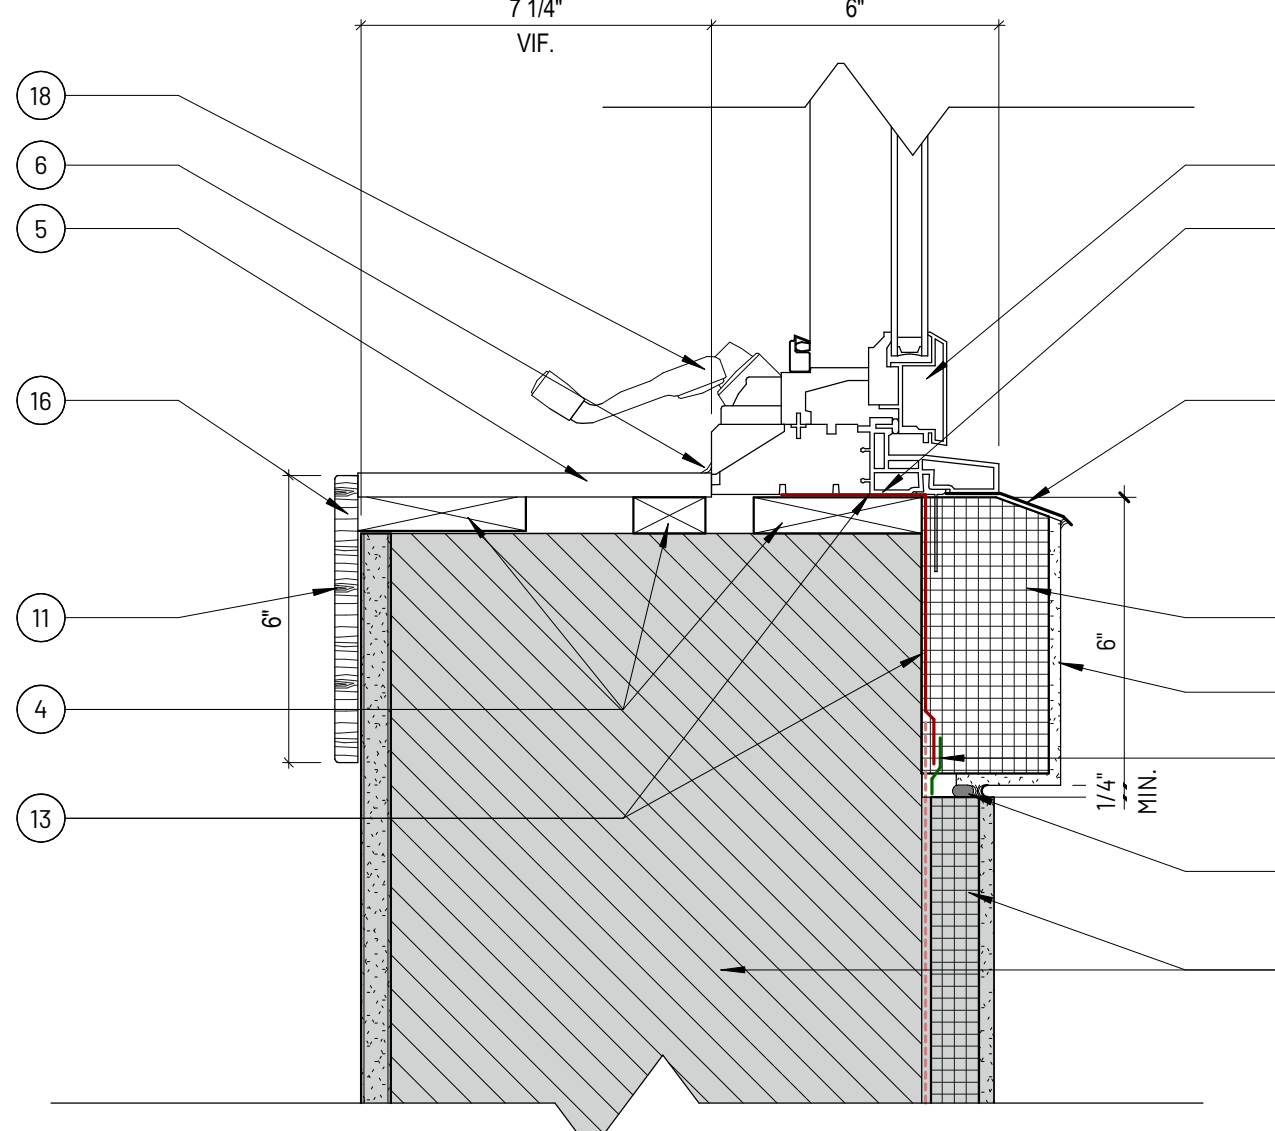

7 SILL
3" = 1'-0"

GENERAL NOTES

- A** ALL EXTERIOR BLOCKING TO BE MOISTURE TREATED EXTERIOR ROUGH OPENINGS, AND ANY WOOD IN CONTACT WITH CONCRETE.
- B** ENSURE ALL WEEPS, THRU WALL FLASHING AND OTHER DRAINAGE CAVITIES REMAIN OPEN TO ALLOW CONDENSATION AND MOISTURE TO ESCAPE. SEALANT SHALL BE APPLIED TO THE UNDERSIDE OF ALL FLASHING AND DRIPS.
- C** FIELD VERIFY EXISTING CONDITIONS IN CONJUNCTION WITH NEW CONSTRUCTION. NOTIFY ARCHITECT OF DISCREPANCIES.
- D** ALL EXTERIOR WALL TYPES ARE SHOWN IN GRAY FOR REFERENCE ONLY. VERIFY WALL MAKEUP AND DIMENSIONS IN FIELD.
- E** SHIM WINDOWS WITH EITHER CEDAR WOOD, TREATED WOOD, OR PLASTIC SHIMS.
- F** FOAM IN PLACE ALL VOIDS AROUND WINDOW TO PROVIDE A CONTINUOUS INSULATION BARRIER BETWEEN THE WINDOW AND THE WALL.
- G** ALL BLOCKING TO BE MECHANICALLY FASTENED AND SET IN ADHESIVE.
- H** VERIFY ALL OPENING SIZES IN FIELD. SIZES MAY VARY. WHEN SIZING WINDOWS ACCOUNT FOR BLOCKING AND SHIMMING.
- I** ALL WINDOW GRIDS WILL BE BID AS ALTERNATE 1.

KEYNOTES

- 1 EXISTING WALL
- 2 WINDOW AS SCHEDULED - VERIFY ALL SIZES IN FIELD.
- 3 BACKER ROD AND SEALANT
- 4 BLOCKING AS REQUIRED - TREATED
- 5 SOLID SURFACE SILL
- 6 SEALANT
- 7 COMPOSITE EXTENSION JAMB - VERIFY WALL DEPTH IN FIELD
- 8 EIFS SYSTEM
- 9 PREFINISHED ALUMINUM FLASHING - COLOR TO MATCH WINDOW FRAME
- 10 FLASHING TAPE
- 11 INSULATION 6" X 3"
- 12 EXISTING WEATHER BARRIER
- 13 WEATHER BARRIER - TO WRAP INTO OPENING
- 14 PLASTER FINISH - PATCH BACK AS NEEDED
- 15 WINDOW NAILING FLANGE - SET IN SEALANT AND MECHANICALLY FASTENED
- 16 COMPOSITE WINDOW TRIM
- 17 SHIM AS REQUIRED
- 18 WINDOW HARDWARE
- 19 ALUMINUM BREAK METAL WRAP - COLOR TO MATCH WINDOW FRAME
- 20 MULLED WINDOW JOINT
- 21 MAXIMIZE LOWER WINDOW SIZE - REMOVE UPPER WINDOW IF POSSIBLE.

LEGEND

- IP - INSULATED PANEL - PROVIDE TWO PANELS PER WINDOW
- RF - INSULATED FIRE RATED GLAZING
- IG - INSULATED GLAZING


REVISIONS

NO.	DESCRIPTION	DATE


IF THIS DRAWING IS NOT 30"x42" IT IS NOT TO SCALE

© COPYRIGHT. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of reconstruction of this project or windows. Unauthorized copying, disclosure or construction use without written permission of Carson Ross Brygger & Associates is prohibited by copyright law.




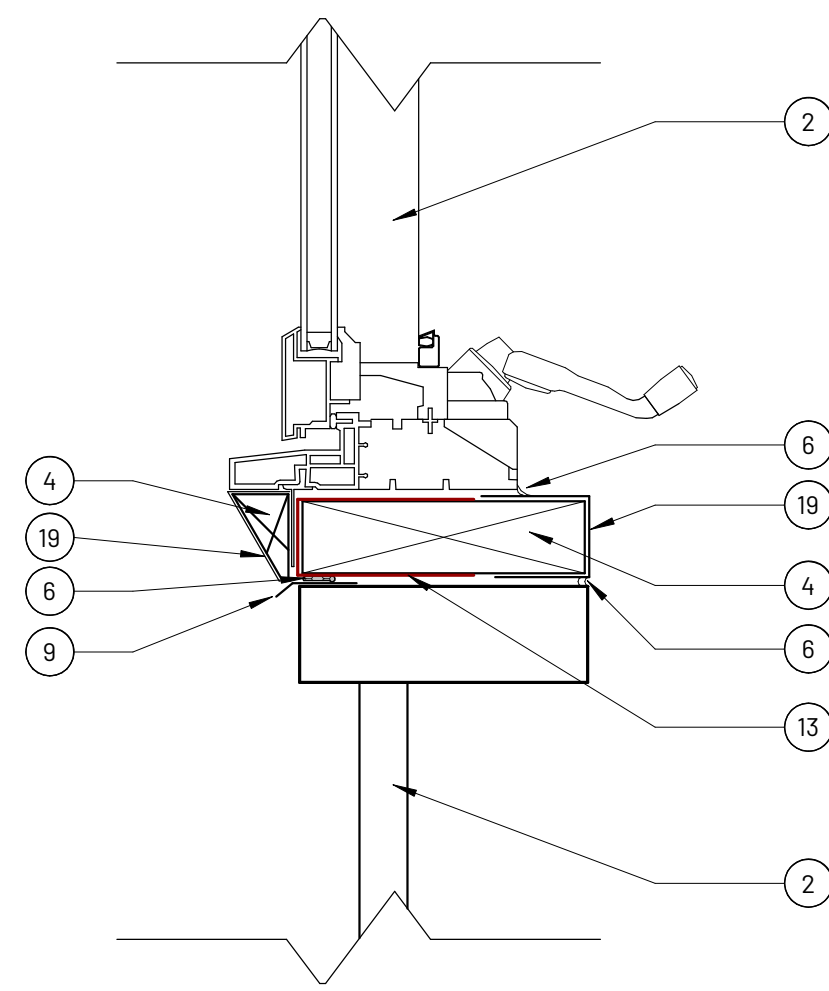


1 WINDOW G & H
3" = 1'-0"

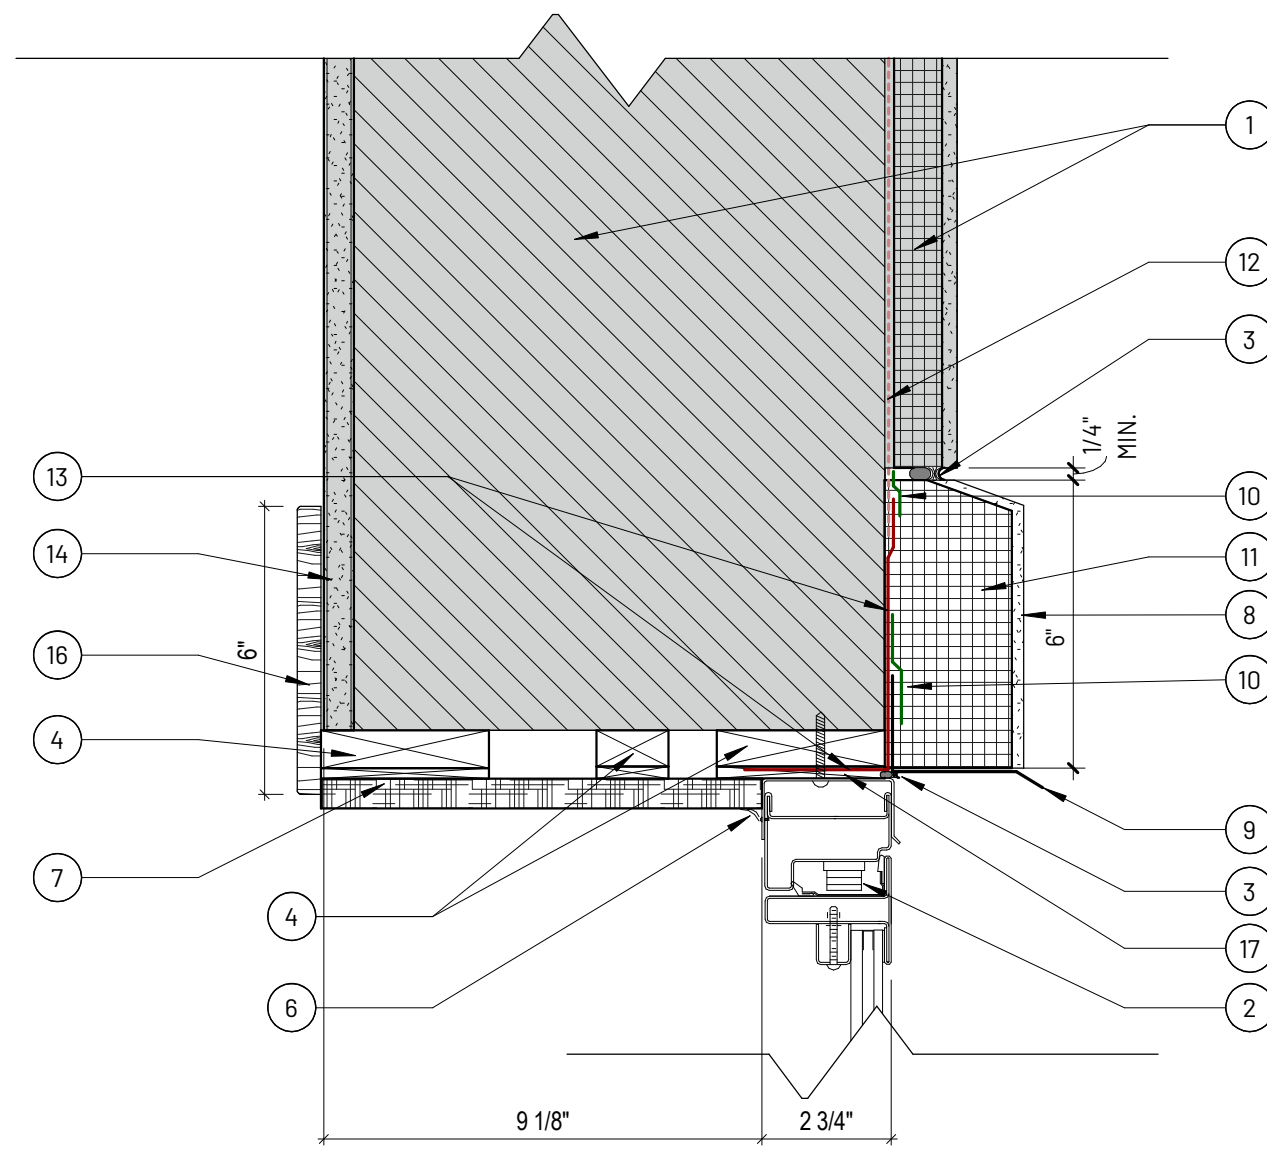


3 HEAD
3" = 1'-0"

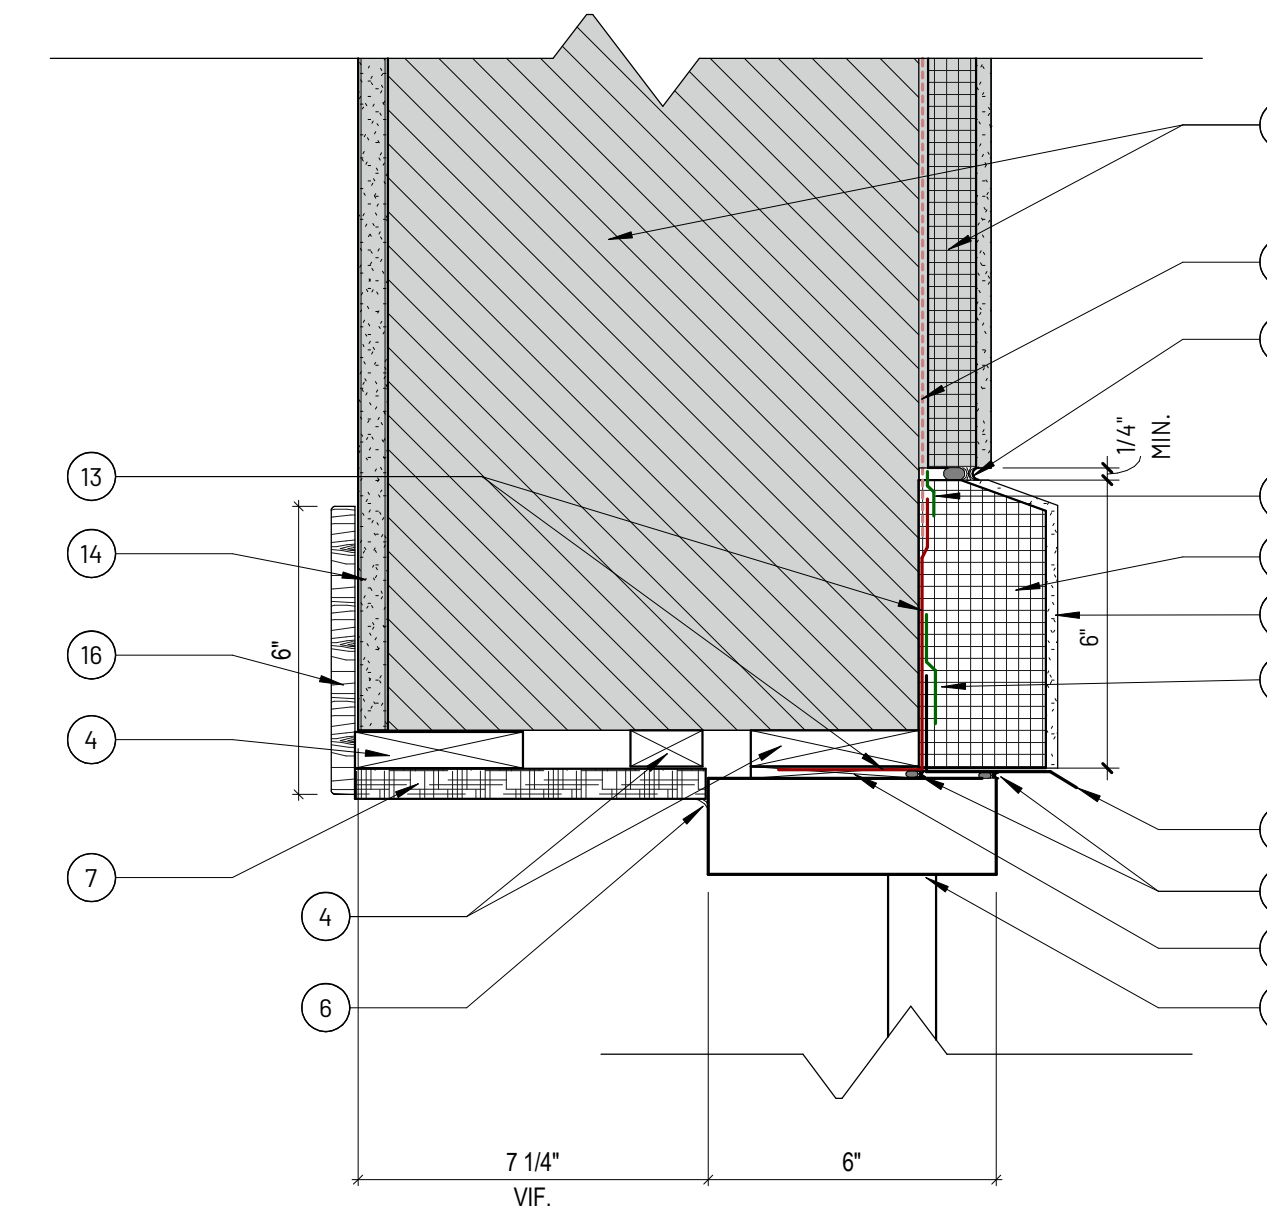


6 HEAD
3" = 1'-0"

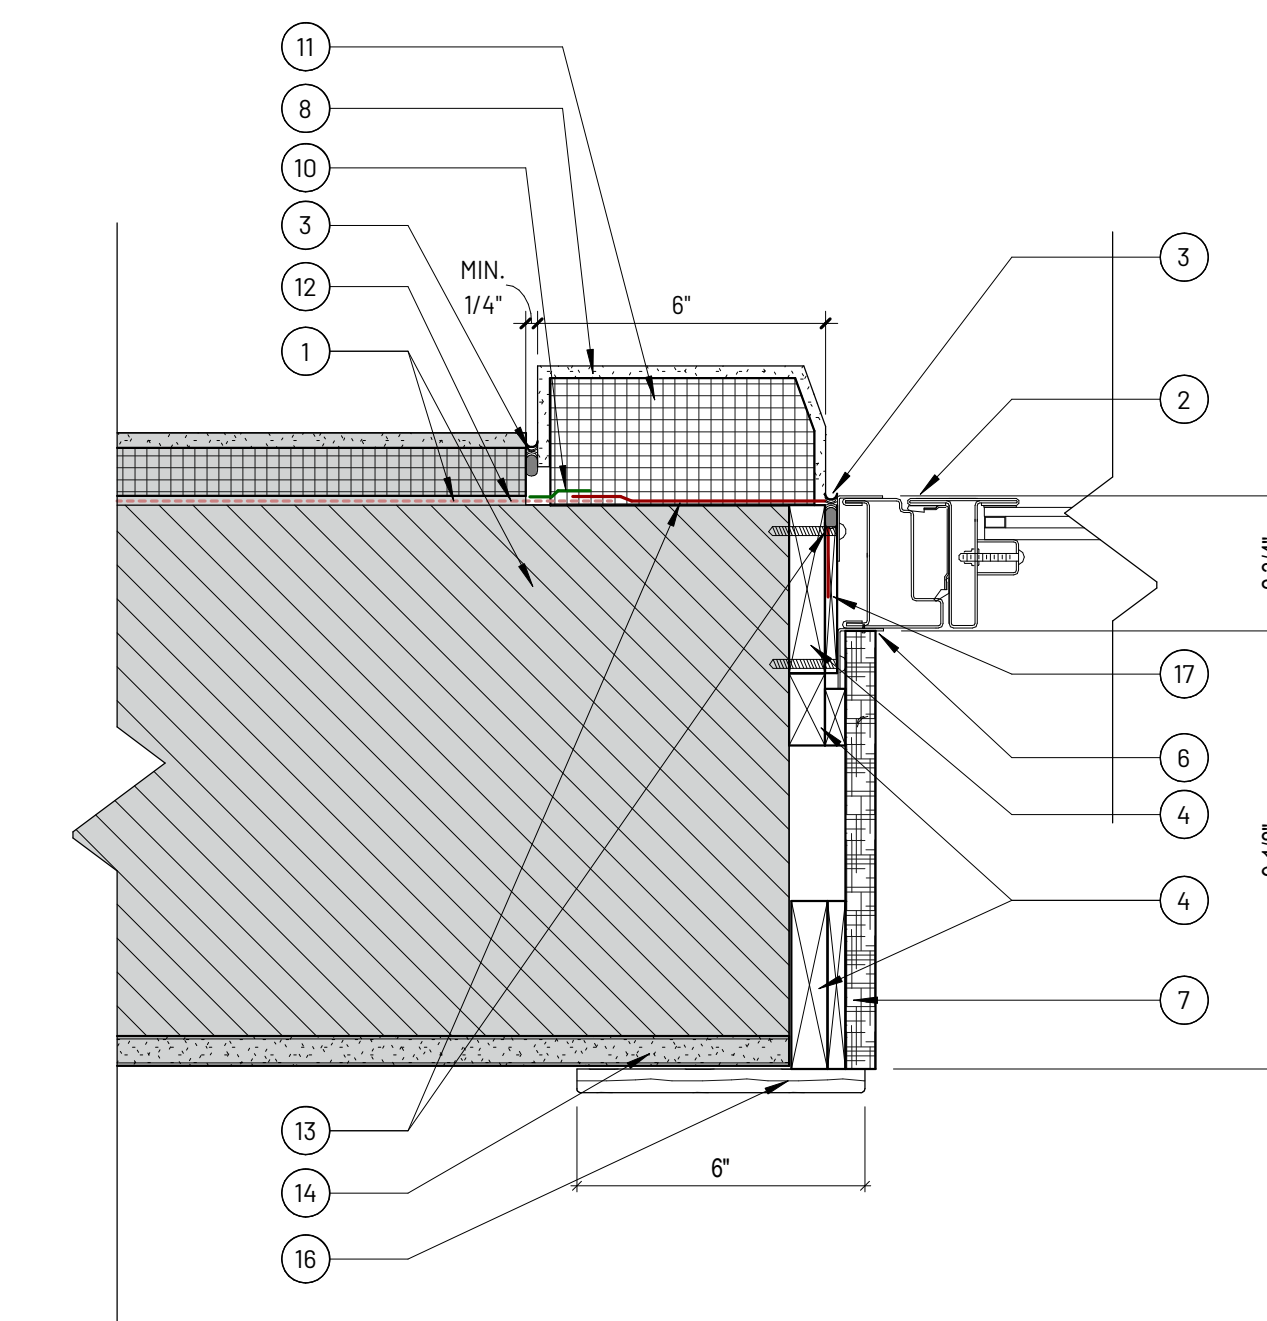


4 JAMB
3" = 1'-0"

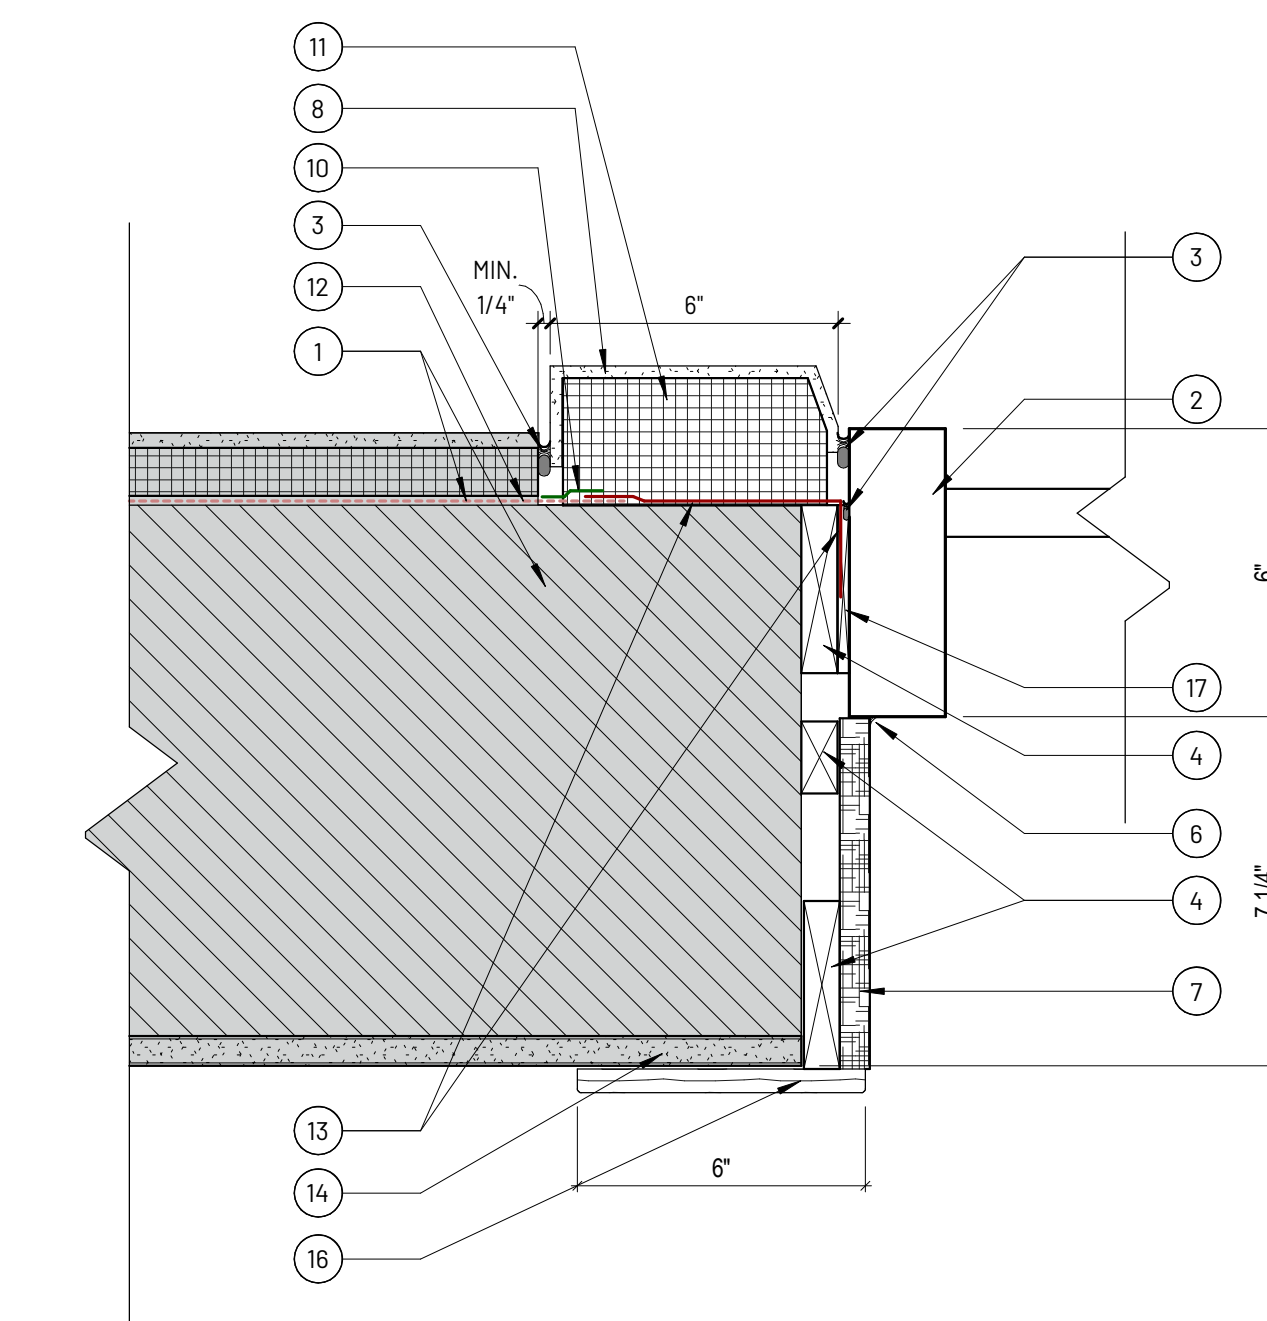


7 JAMB
3" = 1'-0"

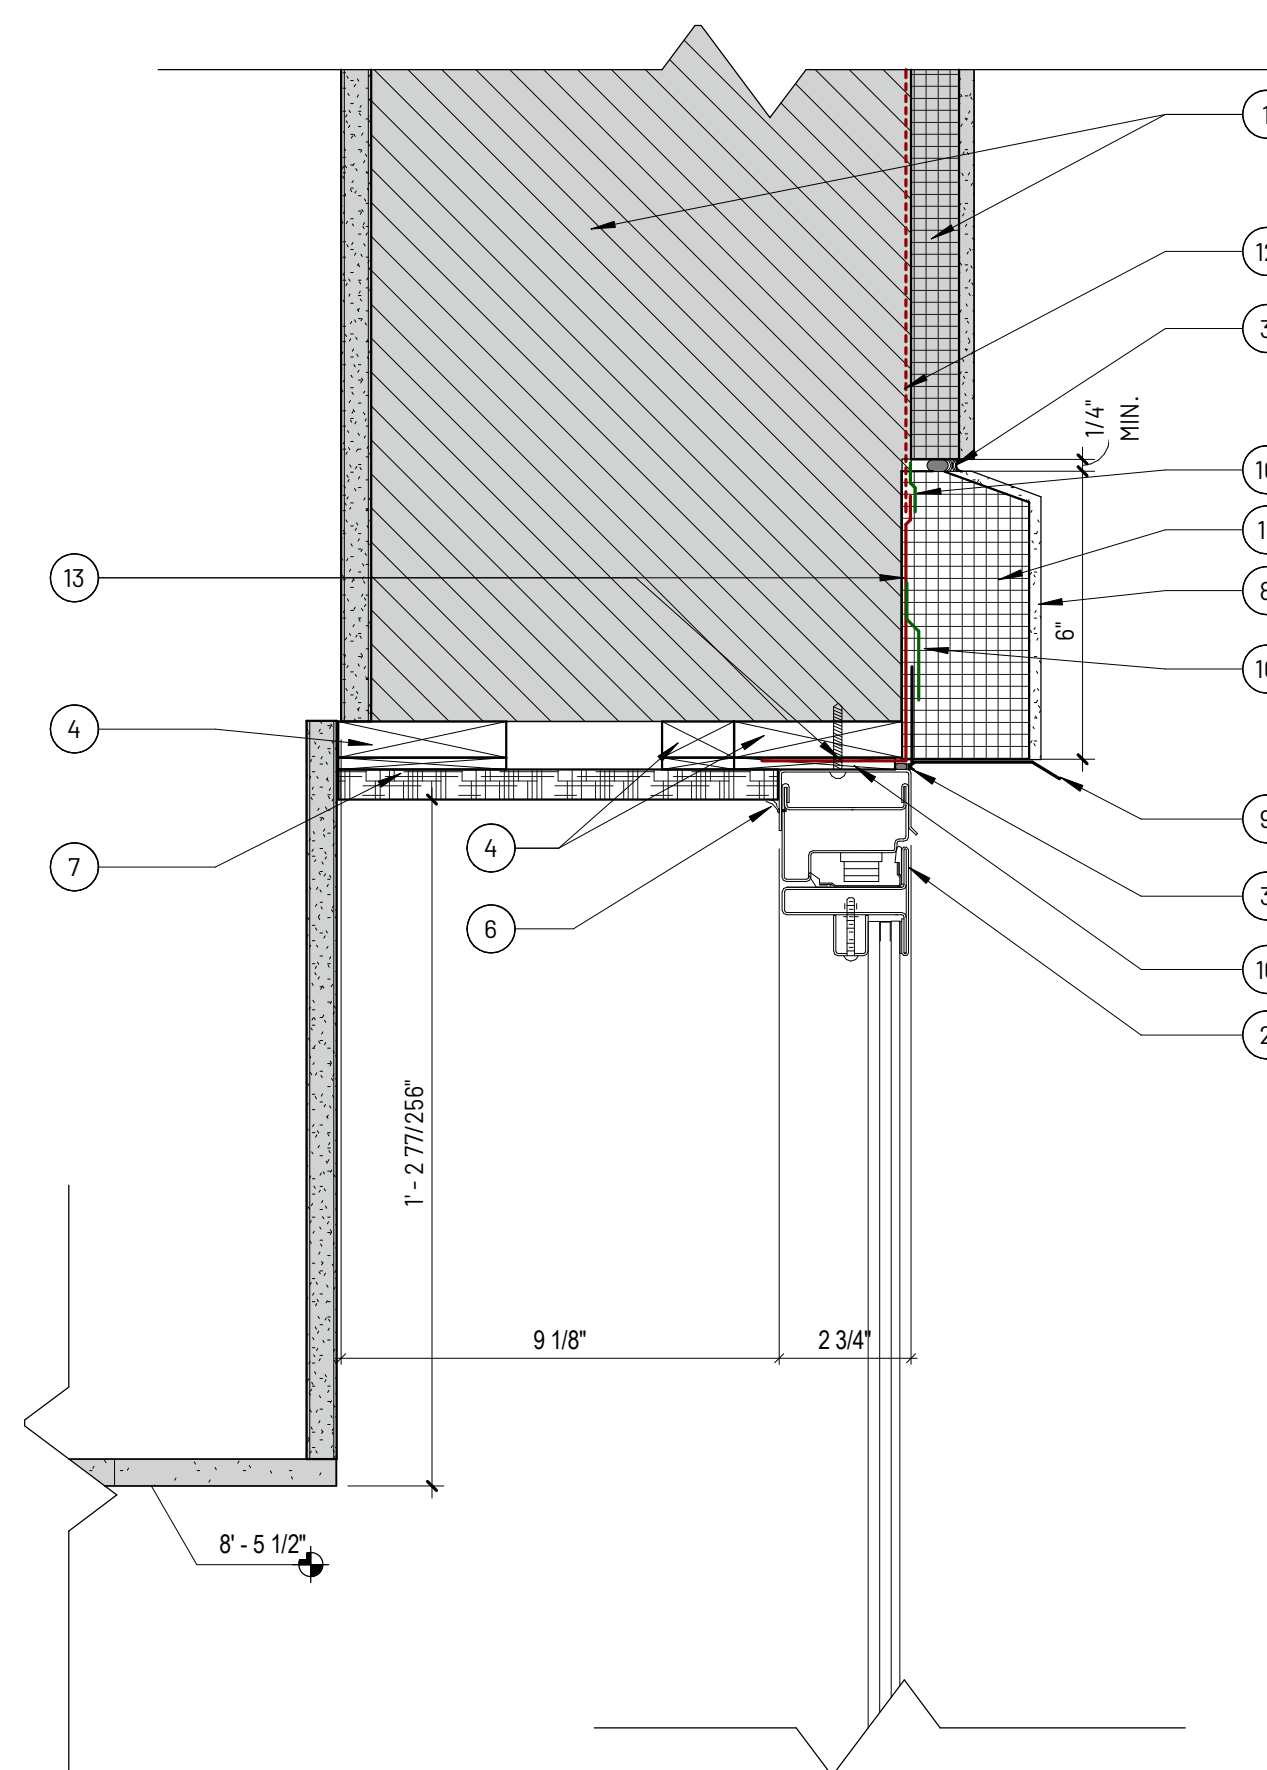

2 HEAD
3" = 1'-0"

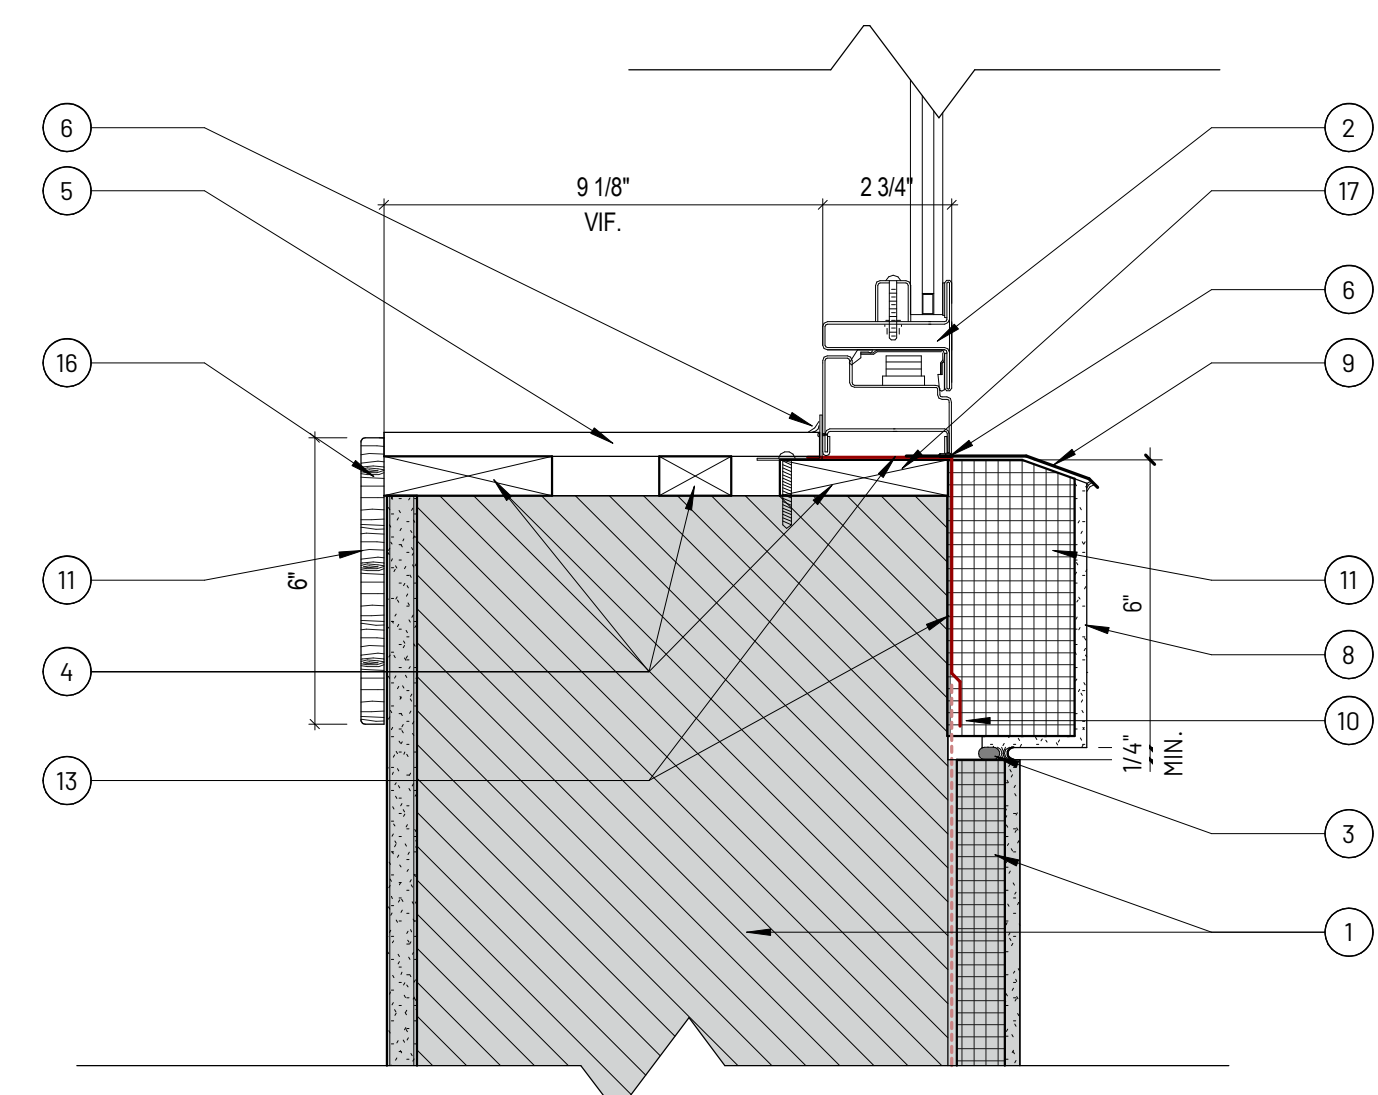

5 SILL
3" = 1'-0"

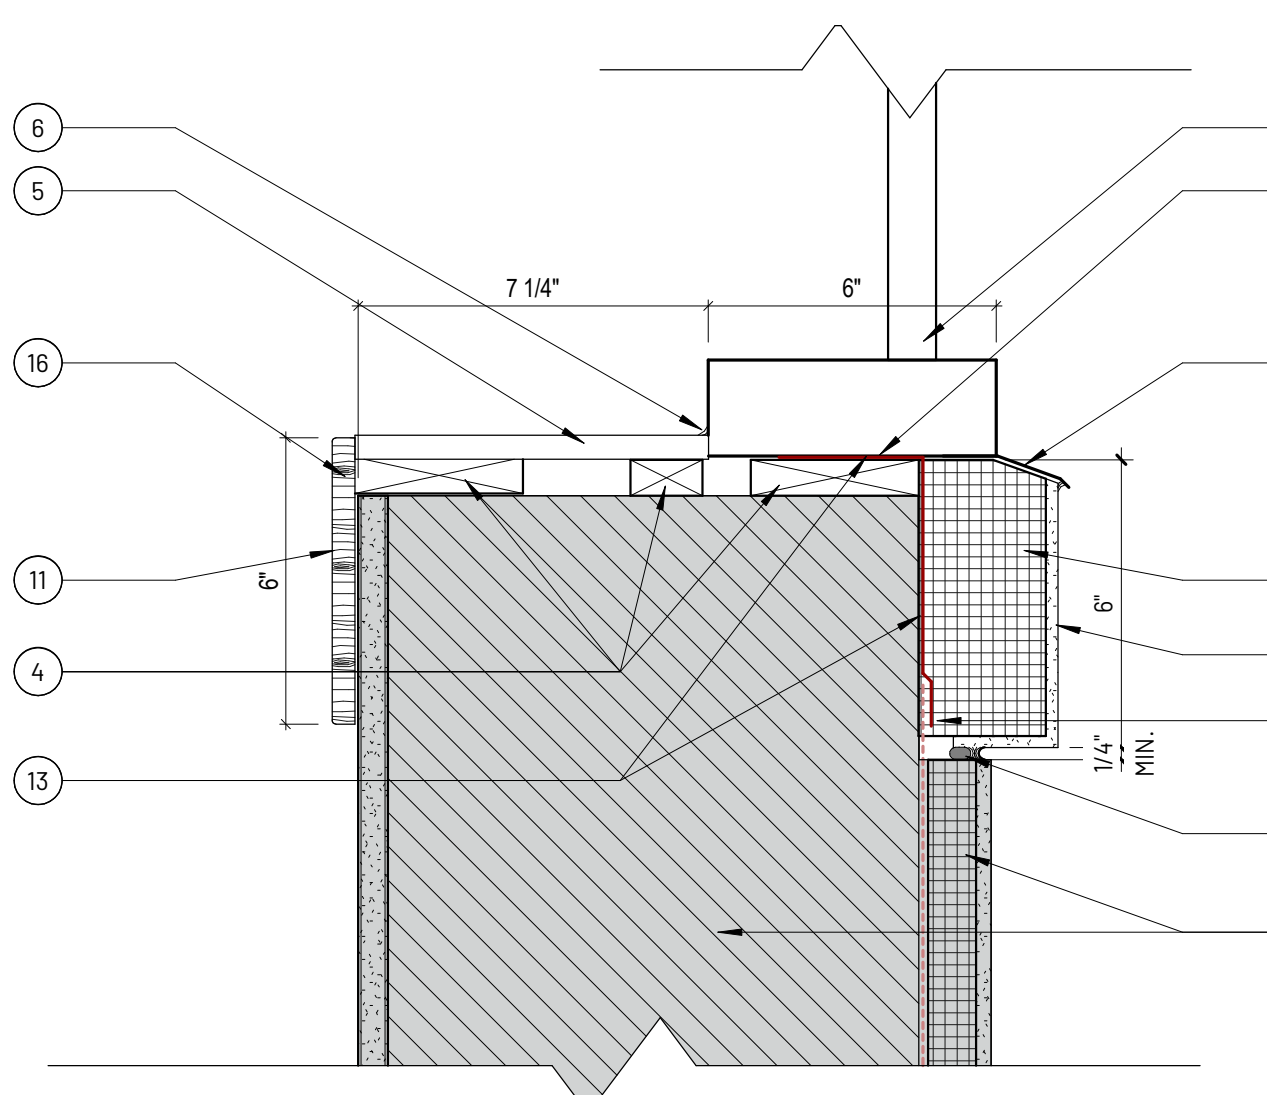

8 SILL
3" = 1'-0"

GENERAL NOTES

- A** ALL EXTERIOR BLOCKING TO BE MOISTURE TREATED (EXTERIOR ROUGH OPENINGS, AND ANY WOOD IN CONTRACT WITH CONCRETE).
- B** ENSURE ALL WEEPS, THRU WALL FLASHING AND OTHER DRAINAGE CAVITIES REMAIN OPEN TO ALLOW CONDENSATION AND MOISTURE TO ESCAPE. SEALANT SHALL BE APPLIED TO THE UNDERSIDE OF ALL FLASHING AND DRIPS.
- C** FIELD VERIFY EXISTING CONDITIONS IN CONJUNCTION WITH NEW CONSTRUCTION. NOTIFY ARCHITECT OF DISCREPANCIES.
- D** ALL EXTERIOR WALL TYPES ARE SHOWN IN GRAY FOR REFERENCE ONLY. VERIFY WALL MAKEUP AND DIMENSIONS IN FIELD.
- E** SHIM WINDOWS WITH EITHER CEDAR WOOD, TREATED WOOD, OR PLASTIC SHIMS.
- F** FOAM IN PLACE ALL VOIDS AROUND WINDOW TO PROVIDE A CONTINUOUS INSULATION BARRIER BETWEEN THE WINDOW AND THE WALL.
- G** ALL BLOCKING TO BE MECHANICALLY FASTENED AND SET IN ADHESIVE.
- H** VERIFY ALL OPENING SIZES IN FIELD. SIZES MAY VARY. WHEN SIZING WINDOWS ACCOUNT FOR BLOCKING AND SHIMMING.
- I** ALL WINDOW GRIDS WILL BE BID AS ALTERNATE 1.

KEYNOTES

- 1 EXISTING WALL
- 2 WINDOW AS SCHEDULED - VERIFY ALL SIZES IN FIELD.
- 3 BACKER ROD AND SEALANT
- 4 BLOCKING AS REQUIRED - TREATED
- 5 SOLID SURFACE SILL
- 6 SEALANT
- 7 COMPOSITE EXTENSION JAMB - VERIFY WALL DEPTH IN FIELD
- 8 EIFS SYSTEM
- 9 PREFINISHED ALUMINUM FLASHING - COLOR TO MATCH WINDOW FRAME
- 10 FLASHING TAPE
- 11 INSULATION 6" X 3"
- 12 EXISTING WEATHER BARRIER
- 13 WEATHER BARRIER - TO WRAP INTO OPENING
- 14 PLASTER FINISH - PATCH BACK AS NEEDED
- 15 WINDOW NAILING FLANGE - SET IN SEALANT AND MECHANICALLY FASTENED
- 16 COMPOSITE WINDOW TRIM
- 17 SHIM AS REQUIRED
- 18 WINDOW HARDWARE
- 19 ALUMINUM BREAK METAL WRAP - COLOR TO MATCH WINDOW FRAME
- 20 MULLED WINDOW JOINT
- 21 MAXIMIZE LOWER WINDOW SIZE - REMOVE UPPER WINDOW IF POSSIBLE.

LEGEND

- IP - INSULATED PANEL - PROVIDE TWO PANELS PER WINDOW
- RF - INSULATED FIRE RATED GLAZING
- IG - INSULATED GLAZING

REVISIONS

NO.	DESCRIPTION	DATE

IF THIS DRAWING IS NOT 30"x42" IT IS NOT TO SCALE

© COPYRIGHT. Permission to reproduce all or part of this drawing is hereby granted solely for the limited purpose of reconstruction of this project or workbooks. Unauthorized copying, disclosure or construction use without written permission of Carson Ross Briggler & Associates is prohibited by copyright law.

FILED IN: IOWA ARCHITECTS BOARD RECORDS - NCCF EDUCATION BUILDING WINDOW REPLACEMENT (2026) DAS DOC NCCF WINDOW REPLACEMENT (2026) FILED IN: IOWA ARCHITECTS BOARD RECORDS - NCCF EDUCATION BUILDING WINDOW REPLACEMENT (2026) DAS DOC NCCF WINDOW REPLACEMENT (2026)