

BULIDING NAMES:

1. Voldeng Building
2. Wirth Hall
3. Main/Administration
4. North A
5. North B
6. North C
7. South A
8. South B
9. South C
10. Rear Center
11. Ginzberg

VOLDENG BUILDING - BASEMENT

*CODE REVIEW INFORMATION CONTINUED FROM SHEET (G002.)

SECTION 1019 EXIT ACCESS STAIRWAYS AND RAMPS:

1019.1 GENERAL:

EXIT ACCESS STAIRWAYS AND RAMPS SERVING AS AN EXIT ACCESS COMPONENT IN A MEANS OF EGRESS SYSTEM SHALL COMPLY WITH THE REQUIREMENTS OF THIS SECTION. THE NUMBER OF STORES CONNECTED BY EXIT ACCESS STAIRWAYS AND RAMPS SHALL INCLUDE BASEMENTS, BUT NOT MEZZANINES.

1019.4 GROUP I-2 AND I-3 OCCUPANCIES:

IN GROUP I-2 AND I-3 OCCUPANCIES, FLOOR OPENINGS BETWEEN STORES CONTAINING EXIT ACCESS STAIRWAYS OR RAMPS ARE REQUIRED TO BE ENCLOSED WITH A SHAFT ENCLOSURE CONSTRUCTED IN ACCORDANCE WITH SECTION 713.

EXCEPTION:

- IN GROUP I-3 OCCUPANCIES, EXIT ACCESS STAIRWAYS OR RAMPS CONSTRUCTED IN ACCORDANCE WITH SECTION 408 ARE NOT REQUIRED TO BE ENCLOSED.

SECTION 1020 CORRIDORS:

THE CORRIDOR WALLS ARE REQUIRED TO BE FIRE RATED ONE HOUR IN ACCORDANCE WITH TABLE 1020.1.*

*IN DISCUSSIONS WITH THE BUILDING CODE OFFICIALS, IT WAS DETERMINED THAT THE CORRIDOR WALLS WOULD NOT BE REQUIRED TO BE FIRE RATED. HOWEVER THE WALLS, DOORS, AND CEILING WOULD NEED TO BE SEALED TO BE SMOKE-TIGHT.

1020.2 WIDTH AND CAPACITY:

MINIMUM CORRIDOR WIDTH FOR THIS BUILDING SHALL NOT BE LESS THAN 44 INCHES IN ACCORDANCE WITH TABLE 1020.2.

1020.4 DEAD ENDS:

WHERE MORE THAN ONE EXIT OR EXIT ACCESS DOORWAY IS REQUIRED, THE EXIT ACCESS SHALL BE ARRANGED SUCH THAT DEAD-END CORRIDORS DO NOT EXCEED 20 FEET IN LENGTH.

EXCEPTION:

- IN OCCUPANCIES IN GROUP I-3 OF CONDITIONS 2, 3 OR 4, THE DEAD END IN A CORRIDOR SHALL NOT EXCEED 50 FEET.

SECTION 1022 EXITS:

1022.2 ARRANGEMENT:

EXTERIOR EXIT DOORS SHALL LEAD DIRECTLY TO THE EXIT DISCHARGE OR THE PUBLIC WAY.

SECTION 1027 EXTERIOR EXIT STAIRWAYS AND RAMPS:

1027.2 USE IN A MEANS OF EGRESS:

FOR OCCUPANCIES OTHER THAN GROUP I-2, EXTERIOR EXIT STAIRWAYS AND RAMPS SHALL BE PERMITTED AS AN ELEMENT OF A REQUIRED MEANS OF EGRESS FOR BUILDINGS NOT EXCEEDING SIX STORES ABOVE GRADE PLANE OR THAT ARE NOT HIGH-RISE BUILDINGS.

SECTION 1028 EXIT DISCHARGE:

1028.1 EXIT DISCHARGE:

EXITS SHALL DISCHARGE DIRECTLY TO THE EXTERIOR OF THE BUILDING.

1028.5 ACCESS TO A PUBLIC WAY:

THE EXIT DISCHARGE SHALL PROVIDE A DIRECT AND UNOBSTRUCTED ACCESS TO A PUBLIC WAY.

ACCESSIBILITY (IBC CHAPTER 11):

1103.1 ACCESSIBILITY (WHERE REQUIRED):

SITES, BUILDINGS, STRUCTURES, FACILITIES, ELEMENTS AND SPACES, TEMPORARY OR PERMANENT, SHALL BE ACCESSIBLE TO PERSONS WITH PHYSICAL DISABILITIES.

1103.2.13 DETENTION AND CORRECTIONAL FACILITIES:

IN DETENTION AND CORRECTIONAL FACILITIES, COMMON USE AREAS THAT ARE USED ONLY BY INMATES OR DETAINEES AND SECURITY PERSONNEL, AND THAT DO NOT SERVE HOLDING CELLS OR HOUSING CELLS REQUIRED TO BE ACCESSIBLE UNITS, ARE NOT REQUIRED TO COMPLY WITH THIS CHAPTER.

SECTION 1104 ACCESSIBLE ROUTES:

1104.1 SITE ARRIVAL POINTS:

ACCESSIBLE ROUTES WITHIN THE SITE SHALL BE PROVIDED FROM PUBLIC TRANSPORTATION STOPS; ACCESSIBLE PARKING; ACCESSIBLE PASSENGER LOADING ZONES; AND PUBLIC STREETS OR SIDEWALKS TO THE ACCESSIBLE BUILDING ENTRANCE SERVED.

1104.2 WITHIN A SITE:

AT LEAST ONE ACCESSIBLE ROUTE SHALL CONNECT ACCESSIBLE BUILDINGS, ACCESSIBLE FACILITIES, ACCESSIBLE ELEMENTS AND ACCESSIBLE SPACES THAT ARE ON THE SAME SITE.

SECTION 1105 ACCESSIBLE ENTRANCES:

1105.1 PUBLIC ENTRANCES:

AT LEAST 60 PERCENT OF ALL PUBLIC ENTRANCES SHALL BE ACCESSIBLE.

1105.1.3 RESTRICTED ENTRANCES:

WHERE RESTRICTED ENTRANCES ARE PROVIDED TO A BUILDING OR FACILITY, AT LEAST ONE RESTRICTED ENTRANCE TO THE BUILDING OR FACILITY SHALL BE ACCESSIBLE.

1105.1.4 ENTRANCES FOR INMATES OR DETAINEES:

WHERE ENTRANCES USED ONLY BY INMATES OR DETAINEES AND SECURITY PERSONNEL ARE PROVIDED AT JUDICIAL FACILITIES, DETENTION FACILITIES OR CORRECTIONAL FACILITIES, AT LEAST ONE SUCH ENTRANCE SHALL BE ACCESSIBLE.

SECTION 1107 DWELLING UNITS AND SLEEPING UNITS:

1107.5.1.1 GROUP I-3 SLEEPING UNITS:

IN GROUP I-3 OCCUPANCIES, AT LEAST 3 PERCENT OF THE TOTAL NUMBER OF SLEEPING UNITS IN THE FACILITY, BUT NOT LESS THAN ONE UNIT IN EACH CLASSIFICATION LEVEL, SHALL BE ACCESSIBLE.

SECTION 1111 SIGNAGE:

SIGNS ARE REQUIRED FOR ACCESSIBLE ELEMENTS.

APPLICABLE BUILDING CODES:

- 2015 INTERNATIONAL BUILDING CODE (IBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201 AND 661-301.
- 2015 INTERNATIONAL FIRE CODE (IFC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201.
- 2012 INTERNATIONAL ENERGY CONSERVATION CODE (IECC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-303.
- 2015 INTERNATIONAL EXISTING BUILDING CODE (IEBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-301 AND 661-303.
- 2010 AMERICANS WITH DISABILITIES ACT (ADA) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-302.
- SMOKE ALARMS / DETECTORS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-210.
- CARBON MONOXIDE ALARMS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-211.
- 2021 INTERNATIONAL MECHANICAL CODE (IMC) - STATE MECHANICAL CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-81.
- 2021 UNIFORM PLUMBING CODE (UPC) - STATE PLUMBING CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-25.
- 2020 NATIONAL ELECTRICAL CODE (NEC) - STATE ELECTRICAL CODE AS ADOPTED BY THE STATE ELECTRICAL LICENSING BOARD IOWA ADMINISTRATIVE RULE 661-504.

CODE REVIEW LEGEND:

- 2-HR EXISTING FIRE RATED WALL WITH 90 MINUTE RATED OPENINGS
- 1-HR FIRE RATED WALL WITH 60 MINUTE RATED OPENINGS
- SMOKE BARRIER WITH 20 MINUTE RATED OPENINGS
- FEC FEC (FIRE EXTINGUISHER CABINET - WALL MOUNTED)



- 0 - COMBINED OCCUPANT LOAD AT GIVEN DOOR OR STAIR
- 0 - TOTAL EXIT CAPACITY OF DOOR OR STAIR (THE CAPACITY OF DOORS ARE DETERMINED AS FOLLOWS: CLEAR OPENING WIDTH IN INCHES DIVIDED BY 0.2 THE CAPACITY OF STAIRS ARE DETERMINED AS FOLLOWS: WIDTH IN INCHES DIVIDED BY 0.3
- # - OCCUPANCY LOAD (ACCESSORY OCCUPANCY LOADS SHOWN IN AN OVAL)

BUILDING CODE INFORMATION:

OCCUPANCY TYPE: I-3 / CONDITION 2
CONSTRUCTION TYPE: V-B
*THE EXISTING BUILDING IS BEING DESIGNED AS A LEVEL 2 ALTERATION IN ACCORDANCE WITH THE 2015 (IEBC) INTERNATIONAL EXISTING BUILDING CODE AND CHAPTER 4, SECTION 408 OF THE 2015 (IBC) INTERNATIONAL BUILDING CODE.
*THE ELEVATOR ADDITION IS BEING DESIGNED IN ACCORDANCE WITH THE 2015 (IBC) INTERNATIONAL BUILDING CODE.

*THE EXISTING BUILDING HAS AN AUTOMATIC FIRE SPRINKLER SYSTEM AND FIRE ALARM SYSTEM, BOTH WILL BE MODIFIED TO MEET ALL CURRENT CODES.

ALLOWABLE BUILDING AREA: 18,750 SF / PER FLOOR*
*ADJUSTED FOR SPRINKLERS AND 75% FRONTAGE INCREASE

TOTAL ALLOWABLE BUILDING AREA: 56,250 SF*
*THE EXISTING BUILDING HAS THREE FLOORS

ACTUAL BUILDING AREA: 11,888 SF (BASEMENT LEVEL)
11,969 SF (FIRST LEVEL)
11,888 SF (SECOND LEVEL)
36,745 SF

TOTAL OCCUPANTS: 69 OCCUPANTS
*CONSIDERED ACCESSORY OCCUPANTS
21 PATIENTS (FIRST LEVEL)
13 STAFF (FIRST LEVEL)
33 PATIENTS (SECOND LEVEL)
2 STAFF (SECOND LEVEL)

*IF THE SQUARE FOOTAGE FOR THE BEDROOMS WERE UNDER HALF OF THE ALLOWABLE SQUARE FOOT PER PERSON (ROUNDED DOWN AND IF IT WAS OVER HALF, I ROUNDED UP.)

TOTAL: 69 OCCUPANTS
ALLOWABLE BUILDING HEIGHT IN FEET: 65'-0" (W/ SPRINKLERS)
ACTUAL BUILDING HEIGHT IN FEET: 50'-8"
ALLOWABLE BUILDING HEIGHT IN STORIES: 2 STORIES (W/ SPRINKLERS)
ACTUAL BUILDING HEIGHT IN STORIES: 3 STORIES

*BASEMENT LEVEL IS MORE THAN 6 FEET ABOVE GRADE.
*THE ISSUE W/ THE NUMBER OF ALLOWABLE STORIES WAS GRANTED A VARIANCE ON JUNE 15, 2023.

EGRESS WIDTH REQUIRED: 13.8" (BASEMENT LEVEL)
*IF ALL OCCUPANTS FROM FIRST & SECOND LEVELS ARE IN THE BASEMENT AT THE SAME TIME

6.8" (FIRST LEVEL)
7" (SECOND LEVEL)
TOTAL: 13.8"

*10.20 IS ALLOWED FOR STAIRWAYS IN BUILDING EQUIPPED W/ AN AUTOMATIC SPRINKLER SYSTEM.

EGRESS WIDTH PROVIDED: 128" (TOTAL OF 4 STAIRS)
48" (RAMP)
TOTAL: 176"

PLUMBING SYSTEMS (2021 UNIFORM PLUMBING CODE):

PLUMBING FIXTURES (TABLE 422.1):

CORRECTIONAL FACILITIES OCCUPANT COUNT FOR PLUMBING FIXTURES: 69

	# REQUIRED	# PROVIDED
WATER CLOSETS:	1 PER 8	12
LAVATORIES:	1 PER 10	12
SHOWERS:	1 PER 8	10

DRINKING FOUNTAINS: 1 PER FLOOR 2"

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.

MOP SINK: 1 1

EMPLOYEE OCCUPANT COUNT FOR PLUMBING FIXTURES: 15

	# REQUIRED	# PROVIDED
MALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1

	# REQUIRED	# PROVIDED
FEMALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1


DRINKING FOUNTAINS: 1 PER 150 2"

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.

MOP SINK: 1 1

GENERAL EXISTING ELEVATOR NOTES:

- THE EXISTING ELEVATOR WILL BE ABANDONED IN PLACE. THE EXISTING DOORS TO ACCESS THE ELEVATOR WILL BE REMOVED AND THE EXISTING OPENINGS WILL BE INFILLED. AND ALL OF THE EXISTING ELEVATOR EQUIPMENT WILL BE DISCONNECTED AND REMOVED FROM THE ELEVATOR EQUIPMENT ROOM.

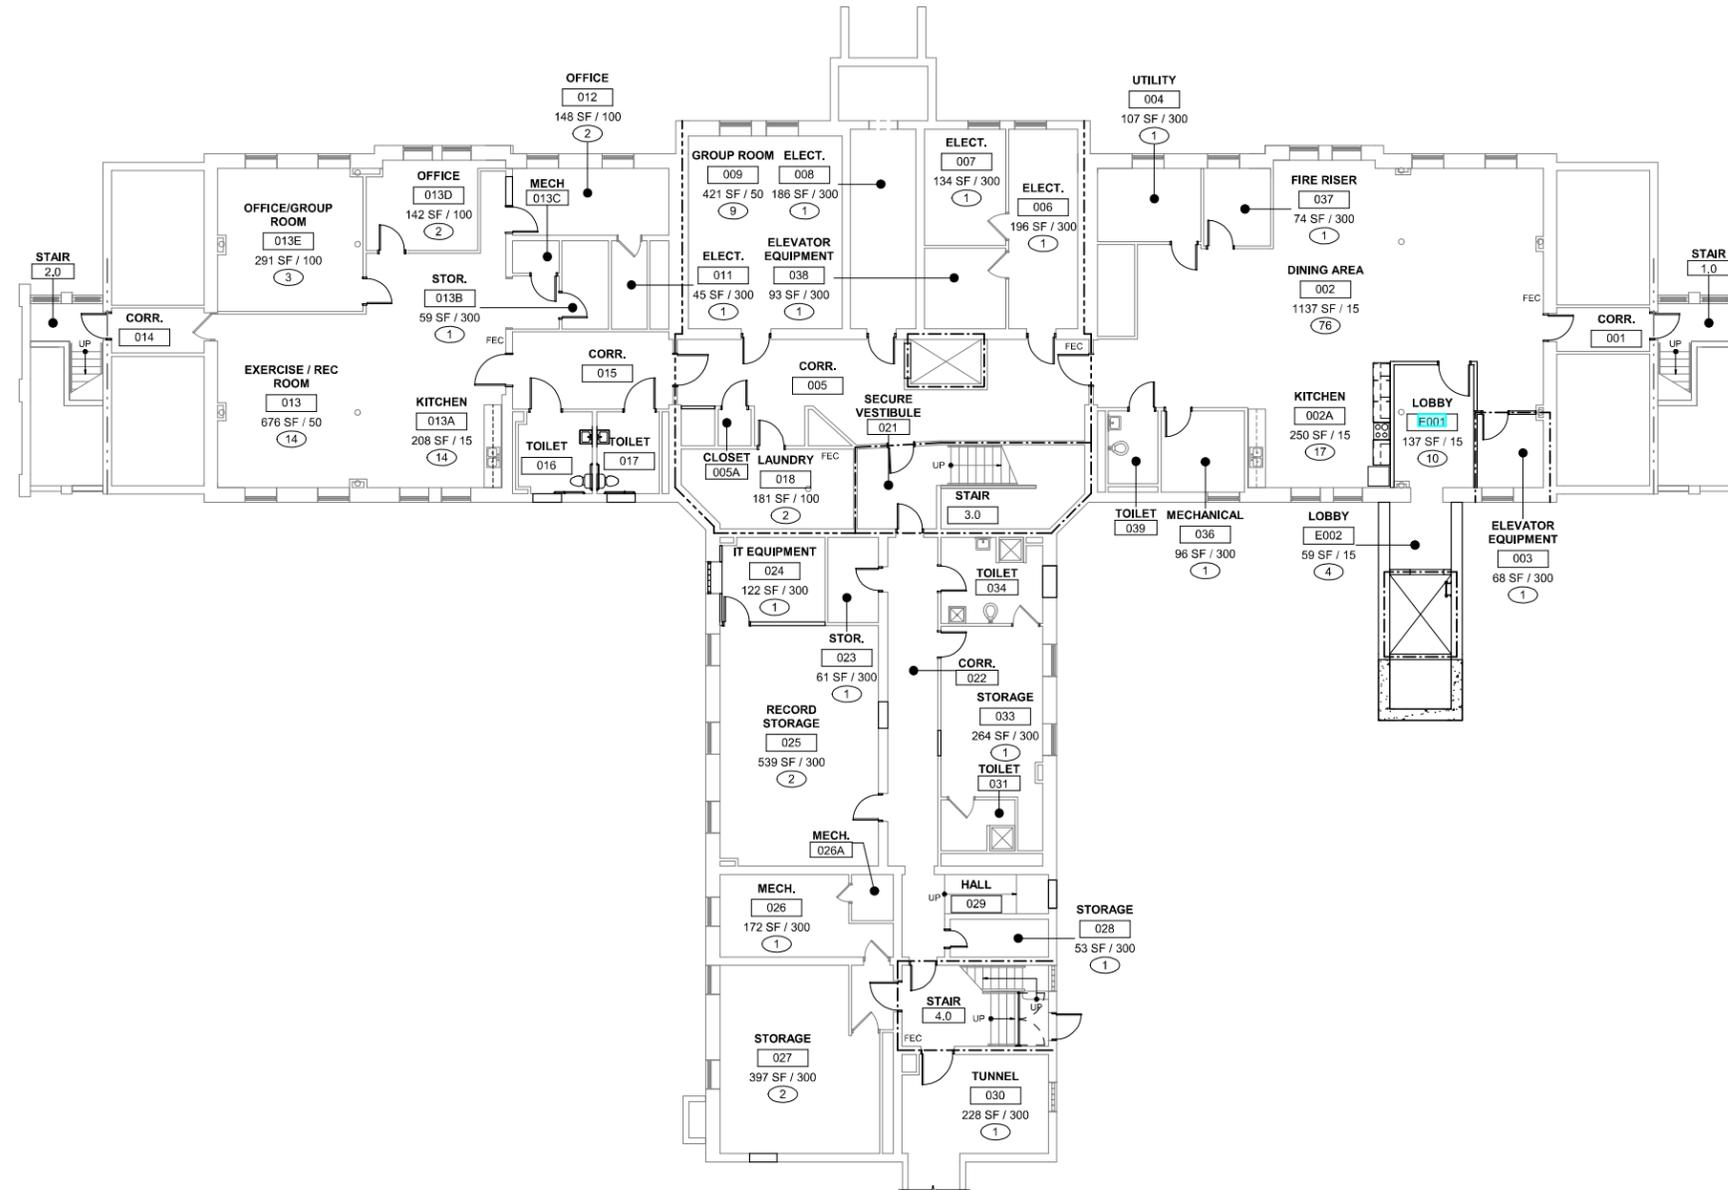


DATE	NO.	DESCRIPTION
03-22-2024	0	BRU SET

These plans are specifically designed for construction by KPE Architecture, Engineering, and Forensics and are intended for no other purposes. Permission for use of these plans is granted only to the client named herein. All other uses without the written consent of KPE are prohibited. The user of these plans, to the extent permitted by law, agrees to indemnify and hold KPE harmless from and against all claims, damages, or costs arising out of or resulting from their unauthorized use. © KPE

DHS CHMHI VOLDENG BUILDING REMODEL (DAS #9283.00)
CHEROKEE MENTAL HEALTH INSTITUTE
1251 W. CEDAR LOOP, CHEROKEE, IOWA 51012


CODE REVIEW PLAN - BASEMENT LEVEL

3555 FARNAM ST., SUITE 406
OMAHA, NE 68131
PHONE: (402) 291-1444
TOLL FREE: (888) 484-4939
WWW.KPE-NE.COM

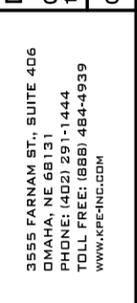

DATE:	03-22-2024
JOB NUMBER:	257-014
SHEET:	G003

VOLDENG BUILDING - 1ST FLOOR

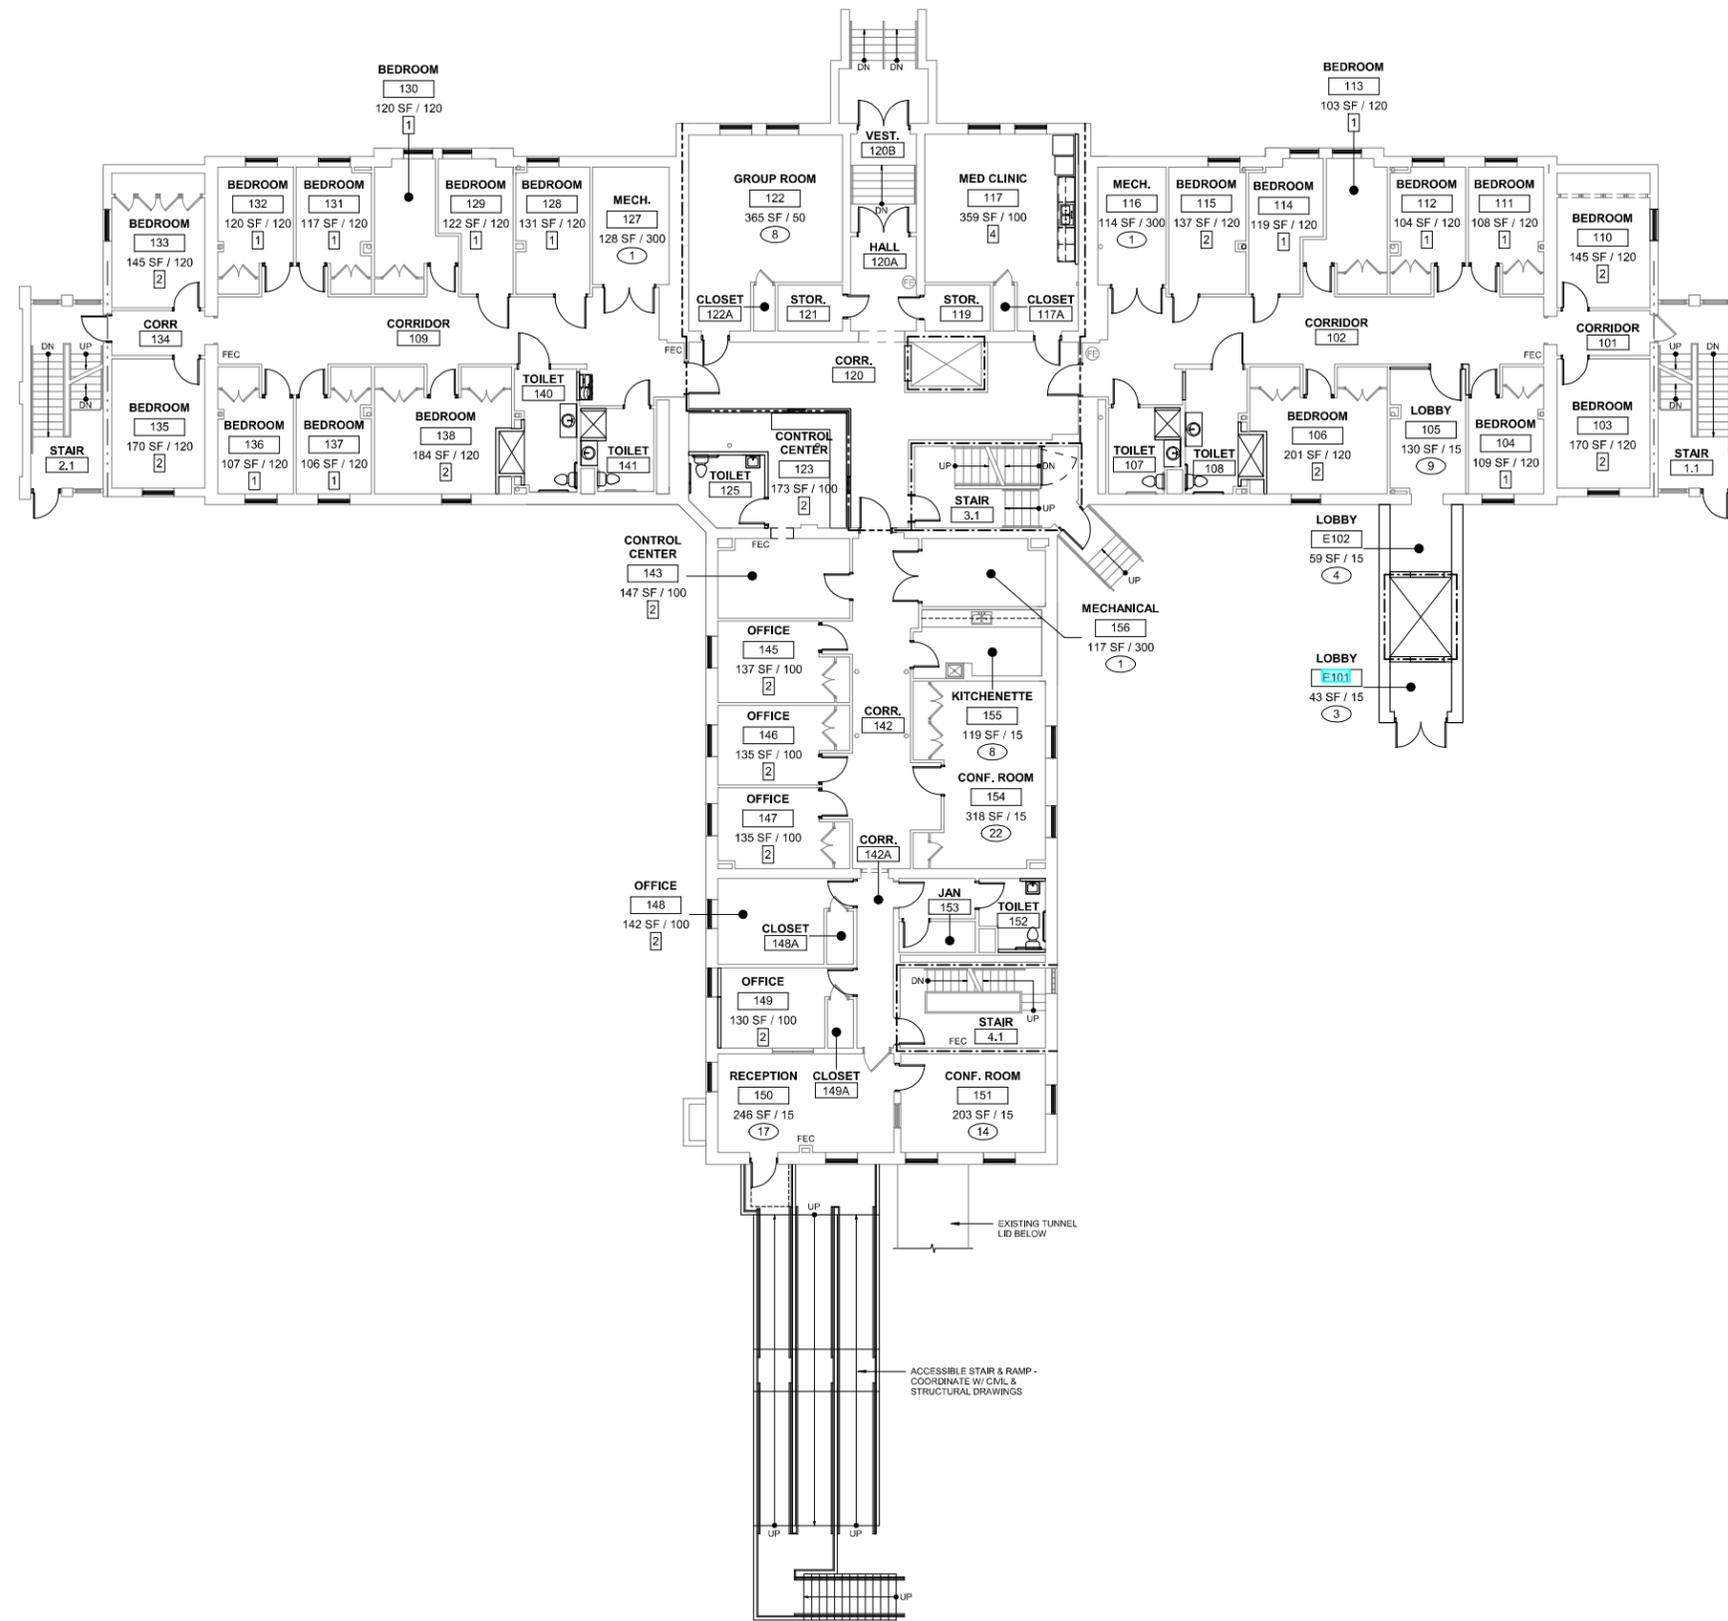

APPLICABLE BUILDING CODES:

- 2015 INTERNATIONAL BUILDING CODE (IBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201 AND 661-301.
- 2015 INTERNATIONAL FIRE CODE (IFC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201.
- 2012 INTERNATIONAL ENERGY CONSERVATION CODE (IECC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-303.
- 2015 INTERNATIONAL EXISTING BUILDING CODE (IEBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-301 AND 661-350.
- 2010 AMERICANS WITH DISABILITIES ACT (ADA) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-302.
- SMOKE ALARMS / DETECTORS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-210.
- CARBON MONOXIDE ALARMS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-211.
- 2021 INTERNATIONAL MECHANICAL CODE (IMC) - STATE MECHANICAL CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-81.
- 2021 UNIFORM PLUMBING CODE (UPC) - STATE PLUMBING CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-25.
- 2020 NATIONAL ELECTRICAL CODE (NEC) - STATE ELECTRICAL CODE AS ADOPTED BY THE STATE ELECTRICAL LICENSING BOARD IOWA ADMINISTRATIVE RULE 661-504.

CODE REVIEW LEGEND:

- 2-HR EXISTING FIRE RATED WALL WITH 90 MINUTE RATED OPENINGS
- 1-HR FIRE RATED WALL WITH 60 MINUTE RATED OPENINGS
- SMOKE BARRIER WITH 20 MINUTE RATED OPENINGS
- FEC FEC (FIRE EXTINGUISHER CABINET - WALL MOUNTED)
- 0 - COMBINED OCCUPANT LOAD AT GIVEN DOOR OR STAIR
- 0 - TOTAL EXIT CAPACITY OF DOOR OR STAIR (THE CAPACITY OF DOORS ARE DETERMINED AS FOLLOWS: CLEAR OPENING WIDTH IN INCHES DIVIDED BY 0.2. THE CAPACITY OF STAIRS ARE DETERMINED AS FOLLOWS WIDTH IN INCHES DIVIDED BY 0.3)
- # - OCCUPANCY LOAD (ACCESSORY OCCUPANCY LOADS SHOWN IN AN OVAL)

BUILDING CODE INFORMATION:

OCCUPANCY TYPE: I-3 / CONDITION 2
 CONSTRUCTION TYPE: V-B

*THE EXISTING BUILDING IS BEING DESIGNED AS A LEVEL 2 ALTERATION IN ACCORDANCE WITH THE 2015 (IEBC) INTERNATIONAL EXISTING BUILDING CODE AND CHAPTER 4, SECTION 406 OF THE 2015 (IBC) INTERNATIONAL BUILDING CODE.

*THE ELEVATOR ADDITION IS BEING DESIGNED IN ACCORDANCE WITH THE 2015 (IBC) INTERNATIONAL BUILDING CODE.

*THE EXISTING BUILDING HAS AN AUTOMATIC FIRE SPRINKLER SYSTEM AND FIRE ALARM SYSTEM. BOTH WILL BE MODIFIED TO MEET ALL CURRENT CODES.

ALLOWABLE BUILDING AREA: 18,750 SF / PER FLOOR*
 *ADJUSTED FOR SPRINKLERS AND 75% FRONTAGE INCREASE

TOTAL ALLOWABLE BUILDING AREA: 56,250 SF*

*THE EXISTING BUILDING HAS THREE FLOORS

ACTUAL BUILDING AREA: 11,888 SF (BASEMENT LEVEL)
 11,969 SF (FIRST LEVEL)
 11,888 SF (SECOND LEVEL)
 36,755 SF

TOTAL ACTUAL BUILDING AREA:

TOTAL OCCUPANTS:

0* (BASEMENT LEVEL)
 *CONSIDERED ACCESSORY OCCUPANTS
 21 PATIENTS (FIRST LEVEL)
 13 STAFF (FIRST LEVEL)
 33 PATIENTS (SECOND LEVEL)
 2 STAFF (SECOND LEVEL)

*IF THE SQUARE FOOTAGE FOR THE BEDROOMS WERE UNDER HALF OF THE ALLOWABLE SQUARE FOOT PER PERSON I ROUNDED DOWN AND IF IT WAS OVER HALF, I ROUNDED UP.

TOTAL: 69 OCCUPANTS

ALLOWABLE BUILDING HEIGHT IN FEET: 65'-0" (W/ SPRINKLERS)
 ACTUAL BUILDING HEIGHT IN FEET: 50'-8"
 ALLOWABLE BUILDING HEIGHT IN STORIES: 2 STORIES (W/ SPRINKLERS)
 ACTUAL BUILDING HEIGHT IN STORIES: 3 STORIES

*BASEMENT LEVEL IS MORE THAN 6 FEET ABOVE GRADE.

*THE ISSUE W/ THE NUMBER OF ALLOWABLE STORIES WAS GRANTED A VARIANCE ON JUNE 15, 2023.

EGRESS WIDTH REQUIRED: 13.8" (BASEMENT LEVEL)
 *IF ALL OCCUPANTS FROM FIRST & SECOND LEVELS ARE IN THE BASEMENT AT THE SAME TIME
 6.8" (FIRST LEVEL)
 7" (SECOND LEVEL)
 TOTAL: 13.8"

*0.20 IS ALLOWED FOR STAIRWAYS IN BUILDING EQUIPPED W/ AN AUTOMATIC SPRINKLER SYSTEM.

EGRESS WIDTH PROVIDED: 128" (TOTAL OF 4 STAIRS)
 48" (RAMP)
 TOTAL: 176"

PLUMBING SYSTEMS (2021 UNIFORM PLUMBING CODE):

PLUMBING FIXTURES (TABLE 422.1):

CORRECTIONAL FACILITIES OCCUPANT COUNT FOR PLUMBING FIXTURES: 69

	# REQUIRED	# PROVIDED
WATER CLOSETS:	1 PER 8	12
LAVATORIES:	1 PER 10	12
SHOWERS:	1 PER 8	10
DRINKING FOUNTAINS:	1 PER FLOOR	2*

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.

MOP SINK: 1 1

EMPLOYEE OCCUPANT COUNT FOR PLUMBING FIXTURES: 15

	# REQUIRED	# PROVIDED
MALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1
FEMALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1
DRINKING FOUNTAINS:	1 PER 150	2*

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.


MOP SINK: 1 1

GENERAL EXISTING ELEVATOR NOTES:

- THE EXISTING ELEVATOR WILL BE ABANDONED IN PLACE. THE EXISTING DOORS TO ACCESS THE ELEVATOR WILL BE REMOVED AND THE EXISTING OPENINGS WILL BE INFILLED. AND ALL OF THE EXISTING ELEVATOR EQUIPMENT WILL BE DISCONNECTED AND REMOVED FROM THE ELEVATOR EQUIPMENT ROOM.

DRAWN: MAM	DESIGNED: MAM	CHECKED: MAM	PROJECT MGR: MAM	BY: KPE	DATE: 03-22-2024
DHS CHMHI VOLDENG BUILDING REMODEL (DAS #9283.00) CHEROKEE MENTAL HEALTH INSTITUTE 1251 W. CEDAR LOOP, CHEROKEE, IOWA 51012 CODE REVIEW PLAN - FIRST LEVEL					
3555 FARNAM ST., SUITE 406 OMAHA, NE 68131 PHONE: (402) 291-1444 TOLL FREE: (888) 484-4939 WWW.KPE-INC.COM					
DATE: 03-22-2024					
JOB NUMBER: 257-014					
SHEET: G004					

VOLDENG BUILDING - 2ND FLOOR

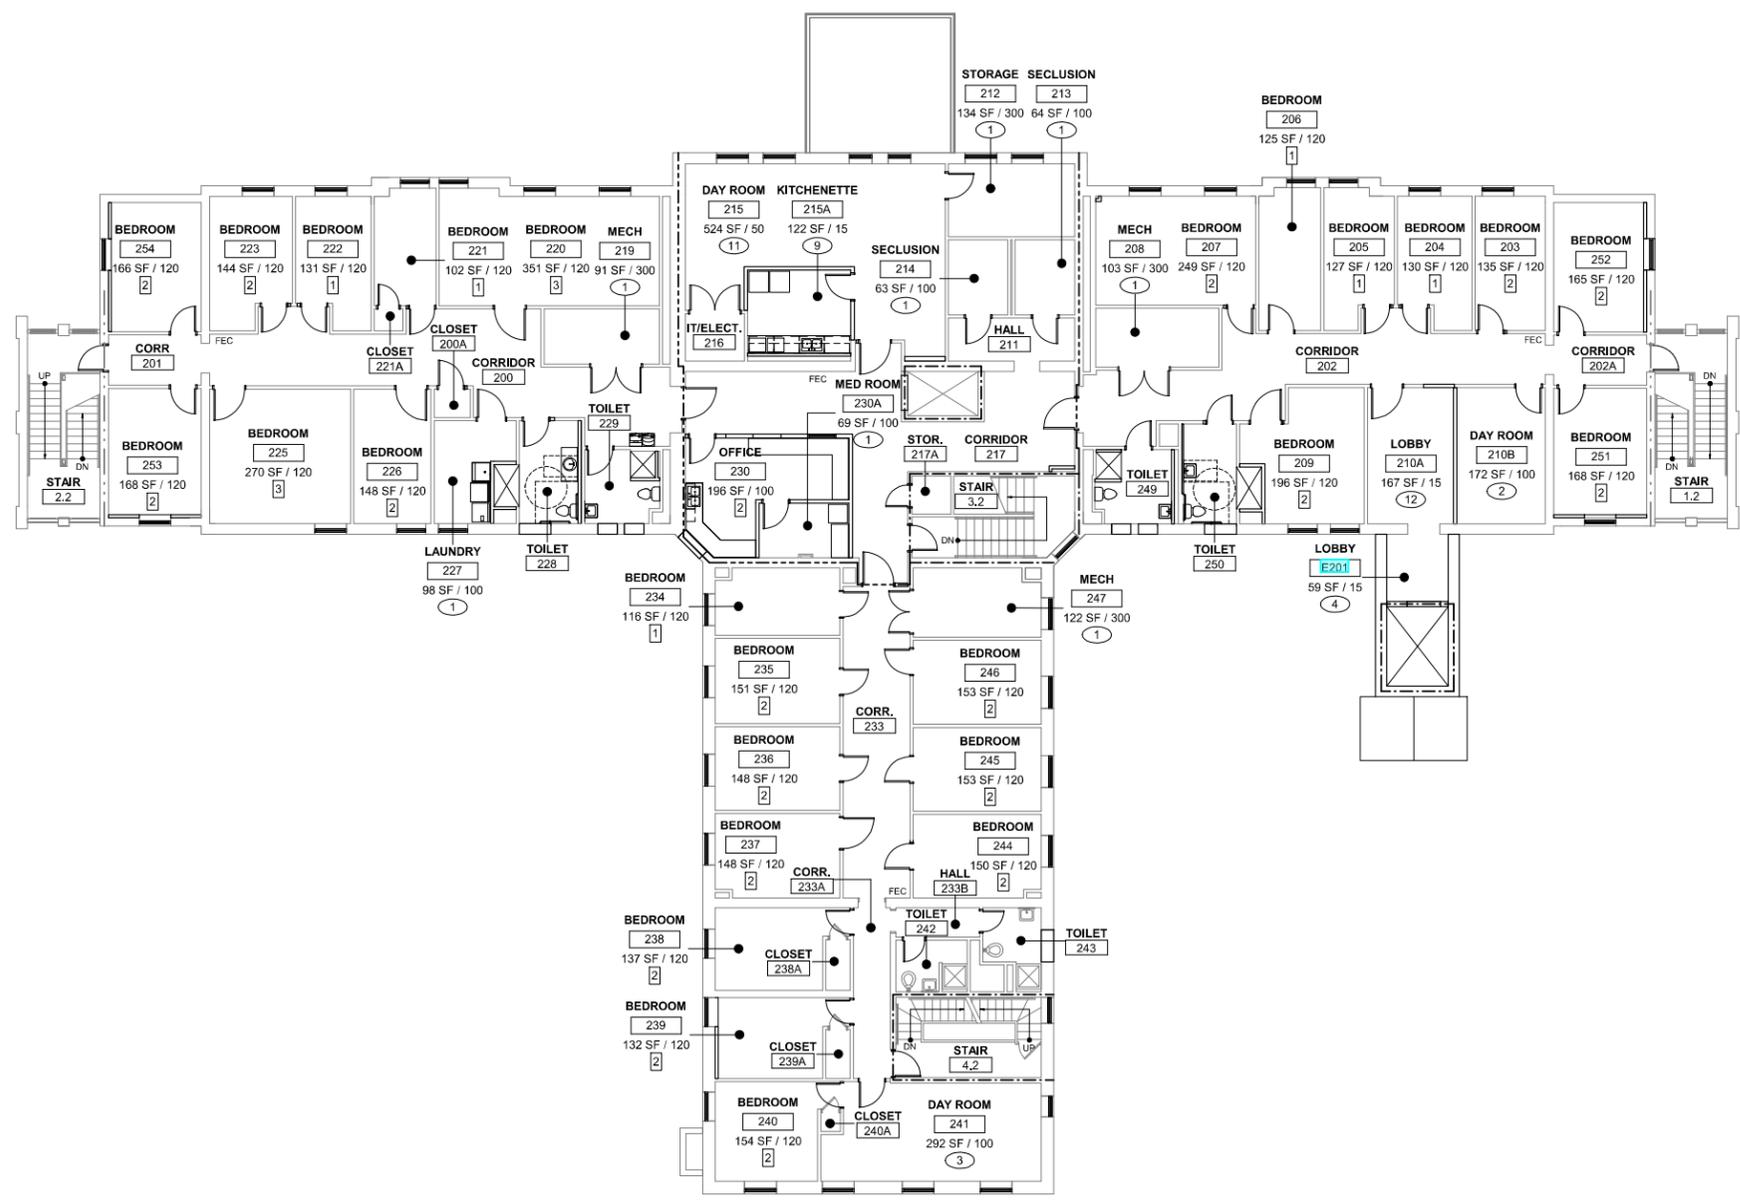

APPLICABLE BUILDING CODES:
 2015 INTERNATIONAL BUILDING CODE (IBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201 AND 661-301.
 2015 INTERNATIONAL FIRE CODE (IFC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-201.
 2012 INTERNATIONAL ENERGY CONSERVATION CODE (IECC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-303.
 2015 INTERNATIONAL EXISTING BUILDING CODE (IEBC) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-301 AND 661-350.
 2010 AMERICANS WITH DISABILITIES ACT (ADA) AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-302.
 SMOKE ALARMS / DETECTORS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-210.
 CARBON MONOXIDE ALARMS AS ADOPTED BY IOWA ADMINISTRATIVE RULE 661-211.
 2021 INTERNATIONAL MECHANICAL CODE (IMC) - STATE MECHANICAL CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-81.
 2021 UNIFORM PLUMBING CODE (UPC) - STATE PLUMBING CODE AS ADOPTED BY THE DEPARTMENT OF PUBLIC HEALTH IOWA ADMINISTRATIVE RULE 641-25.
 2020 NATIONAL ELECTRICAL CODE (NEC) - STATE ELECTRICAL CODE AS ADOPTED BY THE STATE ELECTRICAL LICENSING BOARD IOWA ADMINISTRATIVE RULE 661-504.

CODE REVIEW LEGEND:
 - - - - - 2-HR EXISTING FIRE RATED WALL WITH 90 MINUTE RATED OPENINGS
 - - - - - 1-HR FIRE RATED WALL WITH 60 MINUTE RATED OPENINGS
 - - - - - SMOKE BARRIER WITH 20 MINUTE RATED OPENINGS
 FEC FEC (FIRE EXTINGUISHER CABINET - WALL MOUNTED)
 [Symbol] - COMBINED OCCUPANT LOAD AT GIVEN DOOR OR STAIR
 - TOTAL EXIT CAPACITY OF DOOR OR STAIR
 (THE CAPACITY OF DOORS ARE DETERMINED AS FOLLOWS:
 CLEAR OPENING WIDTH IN INCHES DIVIDED BY 0.2
 THE CAPACITY OF STAIRS ARE DETERMINED AS FOLLOWS:
 WIDTH IN INCHES DIVIDED BY 0.3
 [Symbol] - OCCUPANCY LOAD
 (ACCESSORY OCCUPANCY LOADS SHOWN IN AN OVAL)

BUILDING CODE INFORMATION:
 OCCUPANCY TYPE: I-3 / CONDITION 2
 CONSTRUCTION TYPE: V-B
 *THE EXISTING BUILDING IS BEING DESIGNED AS A LEVEL 2 ALTERATION IN ACCORDANCE WITH THE 2015 (IEBC) INTERNATIONAL EXISTING BUILDING CODE AND CHAPTER 4, SECTION 409 OF THE 2015 (IBC) INTERNATIONAL BUILDING CODE.
 *THE ELEVATOR ADDITION IS BEING DESIGNED IN ACCORDANCE WITH THE 2015 (IBC) INTERNATIONAL BUILDING CODE.
 *THE EXISTING BUILDING HAS AN AUTOMATIC FIRE SPRINKLER SYSTEM AND FIRE ALARM SYSTEM. BOTH WILL BE MODIFIED TO MEET ALL CURRENT CODES.
 ALLOWABLE BUILDING AREA: 18,750 SF / PER FLOOR*
 *ADJUSTED FOR SPRINKLERS AND 75% FRONTAGE INCREASE)
 TOTAL ALLOWABLE BUILDING AREA: 56,250 SF*
 *THE EXISTING BUILDING HAS THREE FLOORS)
 ACTUAL BUILDING AREA: 11,888 SF (BASEMENT LEVEL)
 11,969 SF (FIRST LEVEL)
 11,888 SF (SECOND LEVEL)
 36,750 SF
 TOTAL ACTUAL BUILDING AREA:
 TOTAL OCCUPANTS:
 0* (BASEMENT LEVEL)
 *(CONSIDERED ACCESSORY OCCUPANTS)
 21 PATIENTS (FIRST LEVEL)
 13 STAFF (FIRST LEVEL)
 33 PATIENTS (SECOND LEVEL)
 2 STAFF (SECOND LEVEL)

*IF THE SQUARE FOOTAGE FOR THE BEDROOMS WERE UNDER HALF OF THE ALLOWABLE SQUARE FOOT PER PERSON (ROUNDED DOWN AND IF IT WAS OVER HALF, I ROUNDED UP.)
 TOTAL: 69 OCCUPANTS
 ALLOWABLE BUILDING HEIGHT IN FEET: 65'-0" (W/ SPRINKLERS)
 ACTUAL BUILDING HEIGHT IN FEET: 50'-8"
 ALLOWABLE BUILDING HEIGHT IN STORIES: 2 STORIES (W/ SPRINKLERS)
 ACTUAL BUILDING HEIGHT IN STORIES: 3 STORIES
 *BASEMENT LEVEL IS MORE THAN 6 FEET ABOVE GRADE.)
 *THE ISSUE W/ THE NUMBER OF ALLOWABLE STORIES WAS GRANTED A VARIANCE ON JUNE 15, 2023.)
 EGRESS WIDTH REQUIRED: 13.8" (BASEMENT LEVEL)
 *IF ALL OCCUPANTS FROM FIRST & SECOND LEVELS ARE IN THE BASEMENT AT THE SAME TIME)
 6.8" (FIRST LEVEL)
 7" (SECOND LEVEL)
 TOTAL: 13.8"
 *10.20 IS ALLOWED FOR STAIRWAYS IN BUILDING EQUIPPED W/ AN AUTOMATIC SPRINKLER SYSTEM.)
 EGRESS WIDTH PROVIDED: 128" (TOTAL OF 4 STAIRS)
 48" (RAMP)
 TOTAL: 176"

PLUMBING SYSTEMS (2021 UNIFORM PLUMBING CODE):
PLUMBING FIXTURES (TABLE 422.1):
CORRECTONAL FACILITIES OCCUPANT COUNT FOR PLUMBING FIXTURES: 69

	# REQUIRED	# PROVIDED
WATER CLOSETS:	1 PER 8	12
LAVATORIES:	1 PER 10	12
SHOWERS:	1 PER 6	10
DRINKING FOUNTAINS:	1 PER FLOOR	2*

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.)
 MOP SINK: 1 1

EMPLOYEE OCCUPANT COUNT FOR PLUMBING FIXTURES: 15

	# REQUIRED	# PROVIDED
MALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1
FEMALES:		
WATER CLOSETS:	1: 1-15 / 2: 16-35	1
LAVATORIES:	1 PER 40	1
DRINKING FOUNTAINS:	1 PER 150	2*

*THERE IS A HILO DRINKING FOUNTAIN WITH BOTTLE FILLER ON ONE SIDE ON THE FIRST AND SECOND LEVEL. THERE ARE TWO KITCHENETTES WITH SINKS IN THE BASEMENT LEVEL TO SUBSTITUTE FOR THE DRINKING FOUNTAIN.)
 MOP SINK: 1 1

GENERAL EXISTING ELEVATOR NOTES:
 1. THE EXISTING ELEVATOR WILL BE ABANDONED IN PLACE. THE EXISTING DOORS TO ACCESS THE ELEVATOR WILL BE REMOVED AND THE EXISTING OPENINGS WILL BE INFILLED. AND ALL OF THE EXISTING ELEVATOR EQUIPMENT WILL BE DISCONNECTED AND REMOVED FROM THE ELEVATOR EQUIPMENT ROOM.

DATE	NO.	DESCRIPTION
03-22-2024	0	

These plans are specifically designed for construction by KPE Architecture, Engineering, and Forensics and are intended for no other purpose. Permission for use of these plans is granted to the owner of the building. All other use without consent of KPE is prohibited. The owner of these plans, to the best of their knowledge, is not aware of any other parties who may have a right, claim, or interest in these plans. © KPE 2024. All rights reserved.


DHS CHMHI VOLDENG BUILDING REMODEL (DAS #9283.00)
 CHEROKEE MENTAL HEALTH INSTITUTE
 1251 W. CEDAR LOOP, CHEROKEE, IOWA 51012
CODE REVIEW PLAN - SECOND LEVEL

3555 FARNAM ST., SUITE 406
 OMAHA, NE 68131
 PHONE: (402) 291-1444
 TOLL FREE: (866) 484-4939
 WWW.KPE-NE.COM



DATE: 03-22-2024
 JOB NUMBER: 257-014
 SHEET: G005

WIRTH HALL - BASEMENT

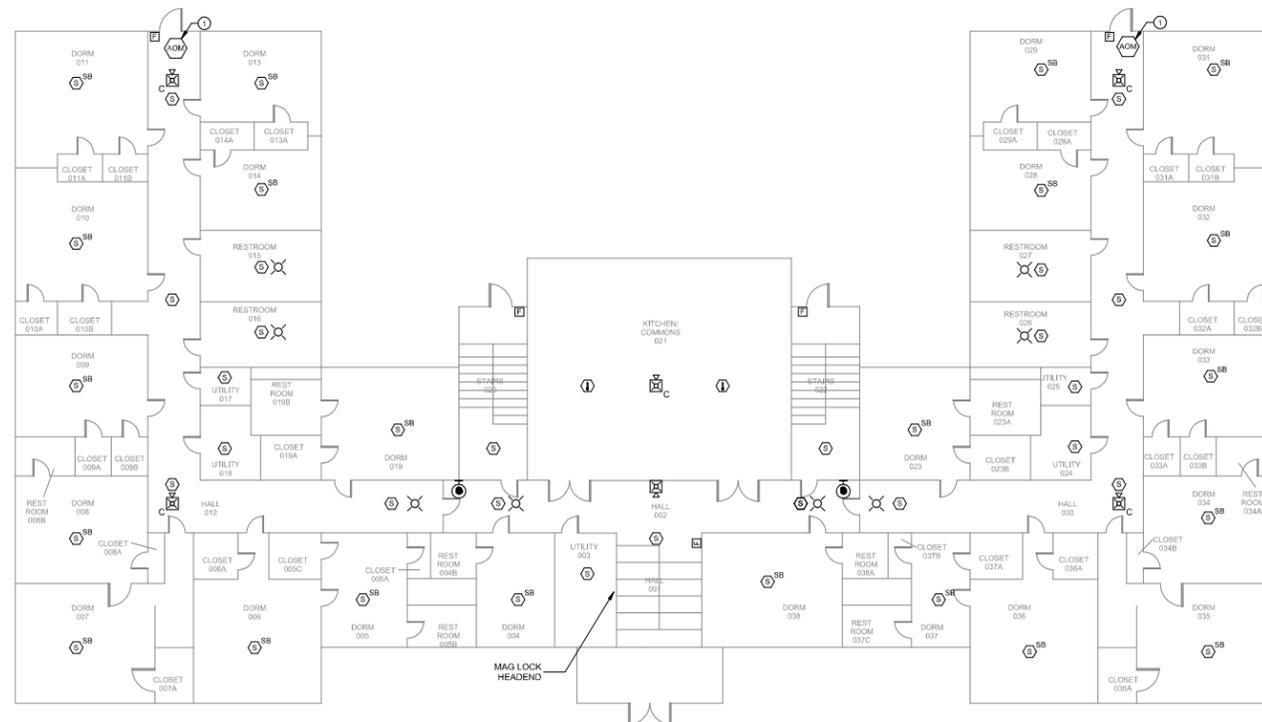

1 WIRTH - BASEMENT
3/17 - 1/22

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILINGS ARE GENERALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - a. MHI - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING

KEYNOTES

- 1 PROVIDE AN ADDRESSABLE RELAY MODULE TO INTERFACE WITH THE EXISTING MAGNETIC LOCK ON THIS OPENING. IN THE EVENT OF A GENERAL FIRE ALARM, MAGNETIC LOCK POWER SHALL BE REMOVED FROM THE DEVICE.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01

Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision Date

Drawing Name:
WIRTH - BASEMENT

Drawing #:
E300


WIRTH HALL - 1ST FLOOR

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILING ARE GENERICALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - a. MH - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING

KEYNOTES

- 1. PROVIDE AN ADDRESSABLE RELAY MODULE TO INTERFACE WITH THE EXISTING MAGNETIC LOCK ON THIS OPENING. IN THE EVENT OF A GENERAL FIRE ALARM, MAGNETIC LOCK POWER SHALL BE REMOVED FROM THE DEVICE.

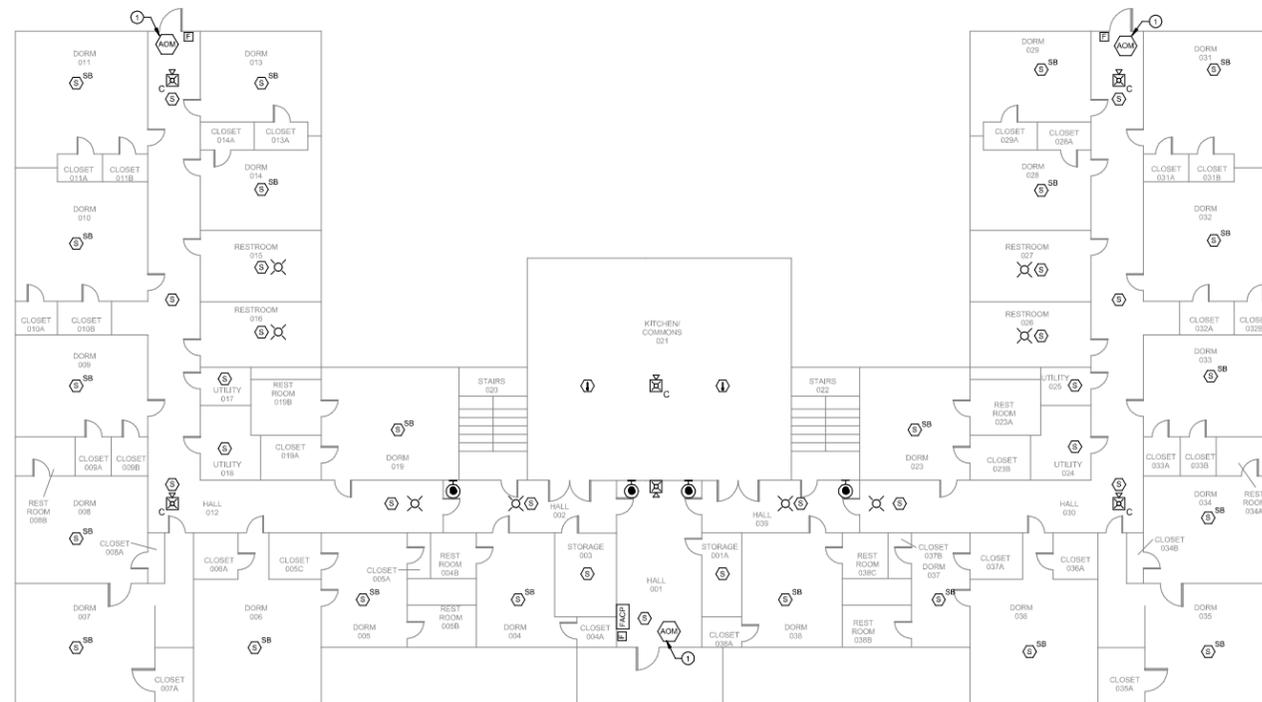

1 WIRTH - 1ST FLOOR
1/8" = 1'-0"

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01

Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision Date

Drawing Name:
WIRTH - 1ST FLOOR

Drawing #:
E301


WIRTH HALL - 2ND FLOOR

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILINGS ARE GENERICALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - a. MHI - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING

KEYNOTES

- 1. PROVIDE AN ADDRESSABLE RELAY MODULE TO INTERFACE WITH THE EXISTING MAGNETIC LOCK ON THIS OPENING. IN THE EVENT OF A GENERAL FIRE ALARM, MAGNETIC LOCK POWER SHALL BE REMOVED FROM THE DEVICE.

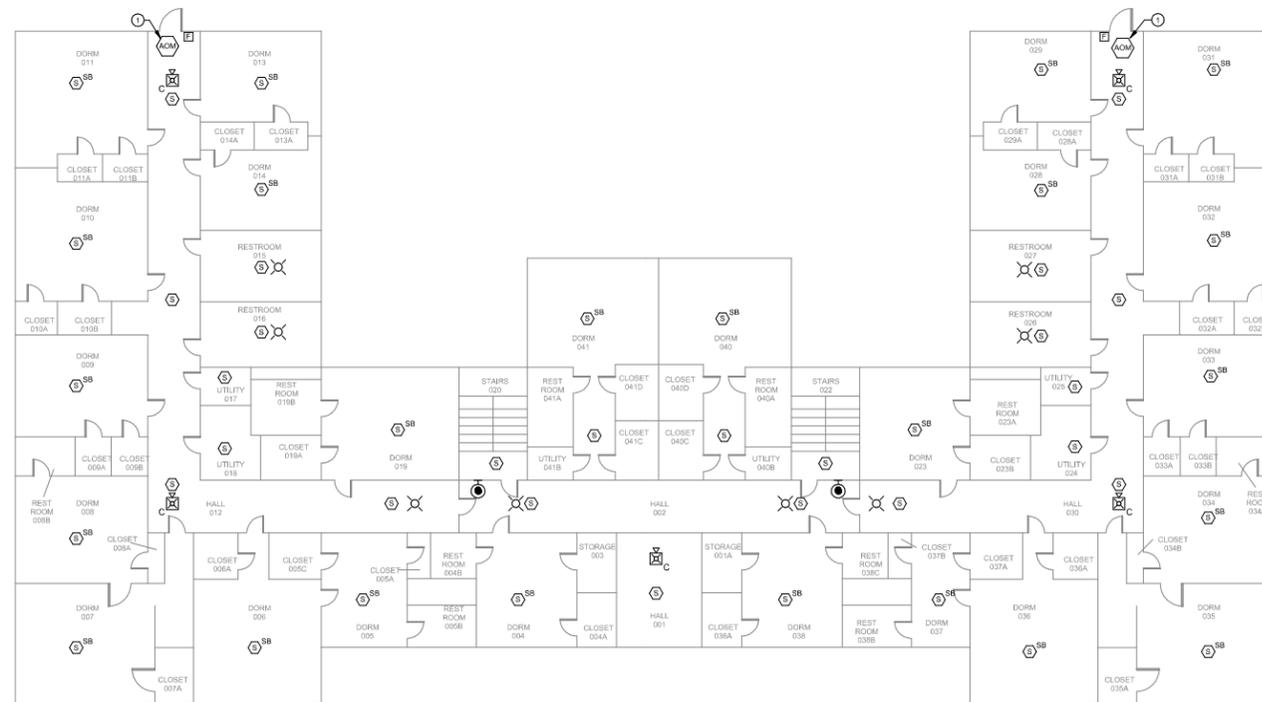

1 WIRTH - 2ND FLOOR
1/8" = 1'-0"


KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE
FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012


Project No:	RFB914100-01
Date:	6/16/2020
CONSTRUCTION DOCUMENTS	
Revision	Date
Drawing Name: WIRTH - 2ND FLOOR	
Drawing #: E302	

MAIN/ADMINISTRATION - SOUTH A BASEMENT

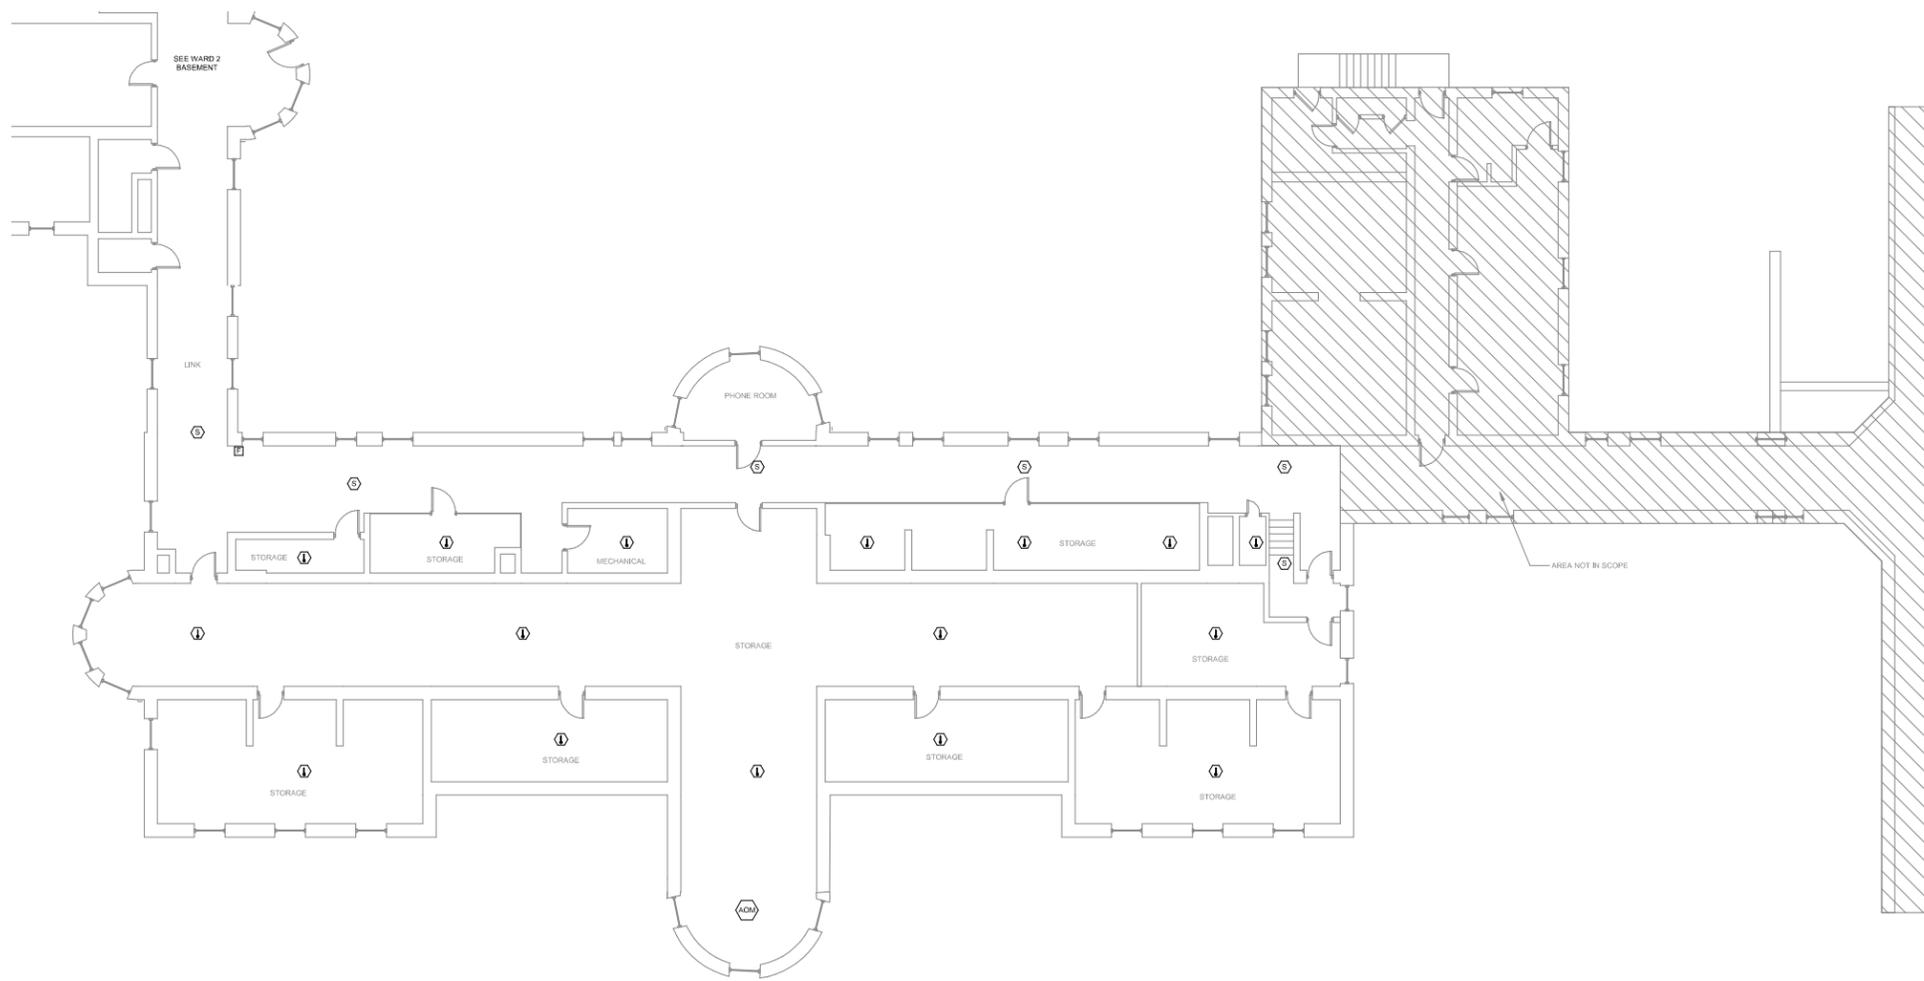

1 MAIN - BASEMENT - WARD 1 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7 LIVING	WARD 8 LIVING	WARD 9 LIVING
LEVEL 2	WARD 4 LIVING	WARD 5 LIVING	WARD 6 LIVING
LEVEL 1	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECHITCHEN
BASEMENT	BELOW WARD 1 BASEMENT	BELOW WARD 2 BASEMENT	BELOW WARD 3 BASEMENT

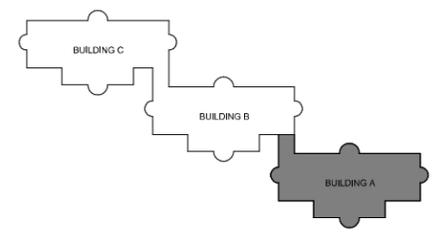

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
BASEMENT - WARD 1 - DEMOLITION

Drawing #:
ED100


MAIN/ADMINISTRATION - SOUTH B BASEMENT

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
 300 4th Street,
 West Des Moines,
 Iowa 50265
 info@kclengineering.com
 Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

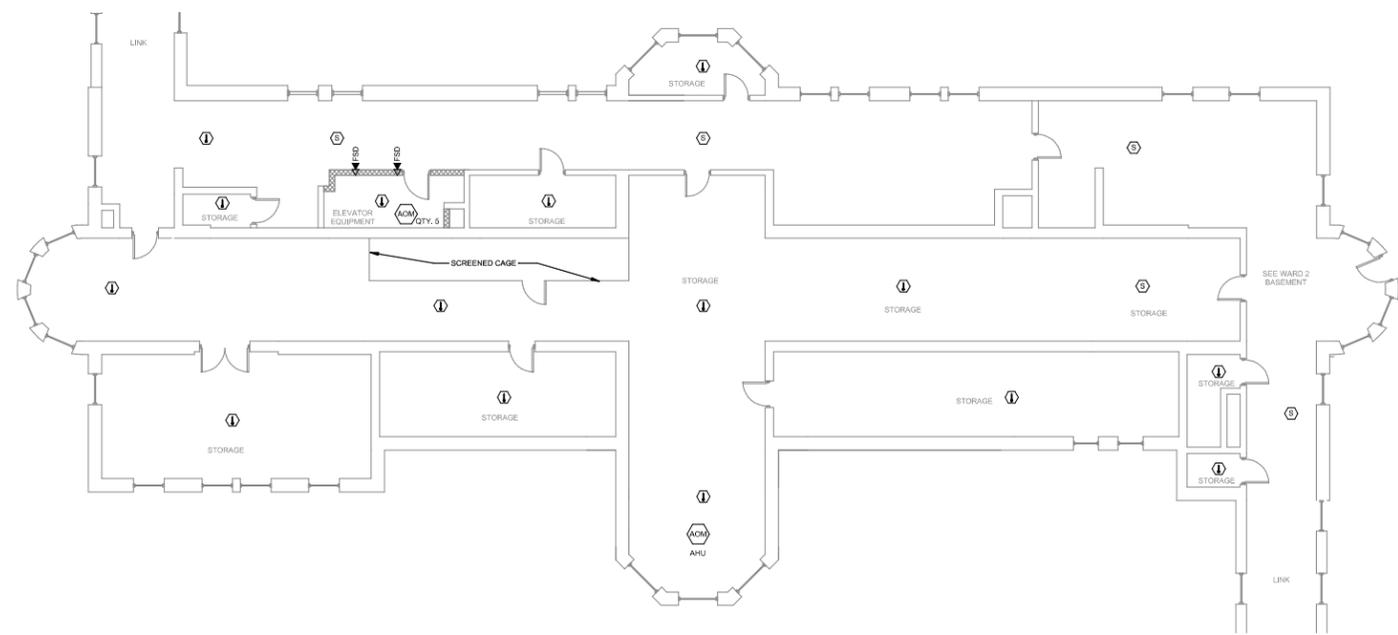


① MAIN-BASEMENT-WARD 2- DEMO
 1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7 LIVING	WARD 8 LIVING	WARD 9 LIVING
LEVEL 2	WARD 4 LIVING	WARD 5 LIVING	WARD 6 LIVING
LEVEL 1	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

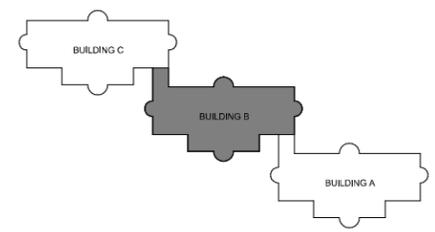


Project No: RFB914100-01
 Date: 6/16/2020
CONSTRUCTION DOCUMENTS
 Revision Date
 Drawing Name:
BASEMENT - WARD 2 - DEMOLITION
 Drawing #:
ED101

MAIN/ADMINISTRATION - SOUTH C BASEMENT

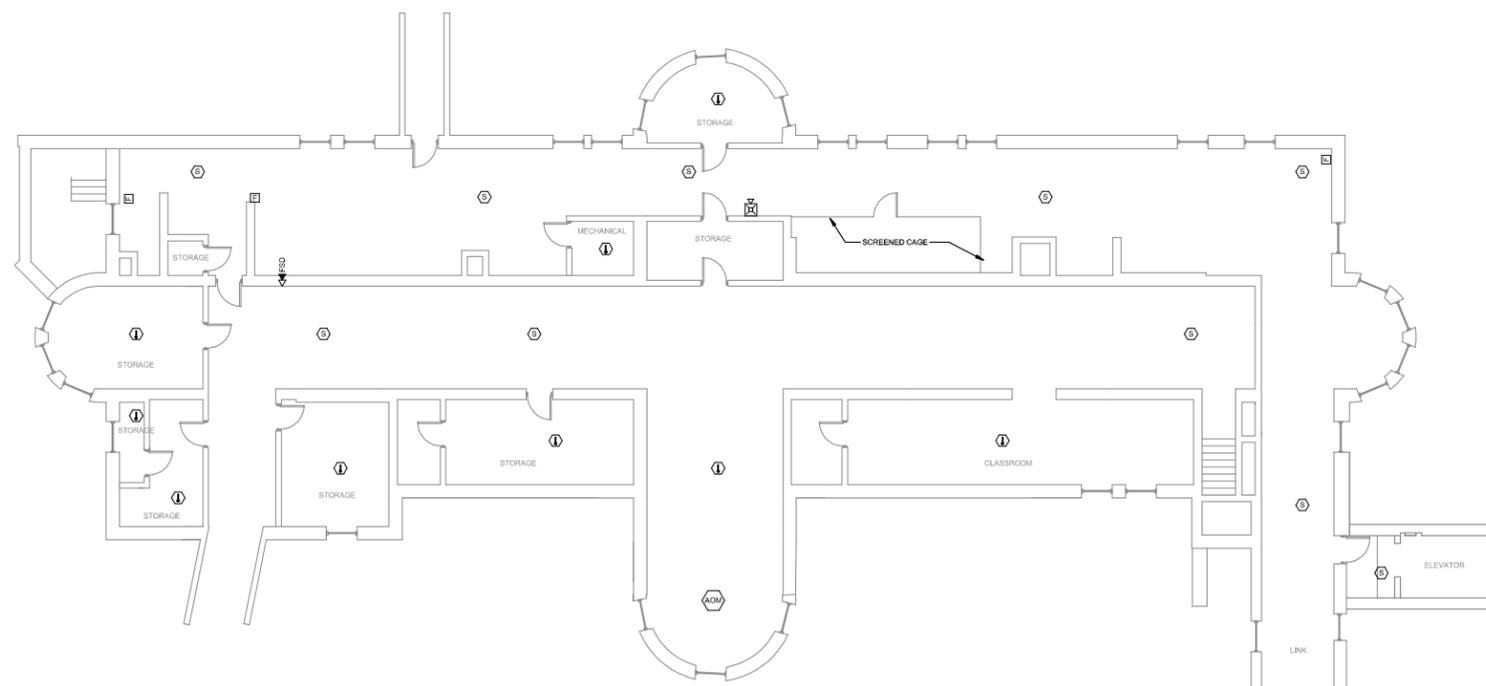

1 MAIN-BASEMENT- WARD 3 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
	LIVING	LIVING	LIVING
LEVEL 2	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
	OFFICE	OFFICE/CLASS	RECKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST./ARTS

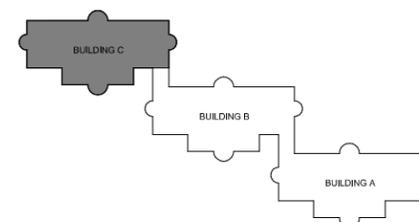

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.


KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS
Revision Date
Drawing Name:
BASEMENT - WARD 3 - DEMOLITION
Drawing #:
ED102

MAIN/ADMINISTRATION - SOUTH A 1ST FLOOR

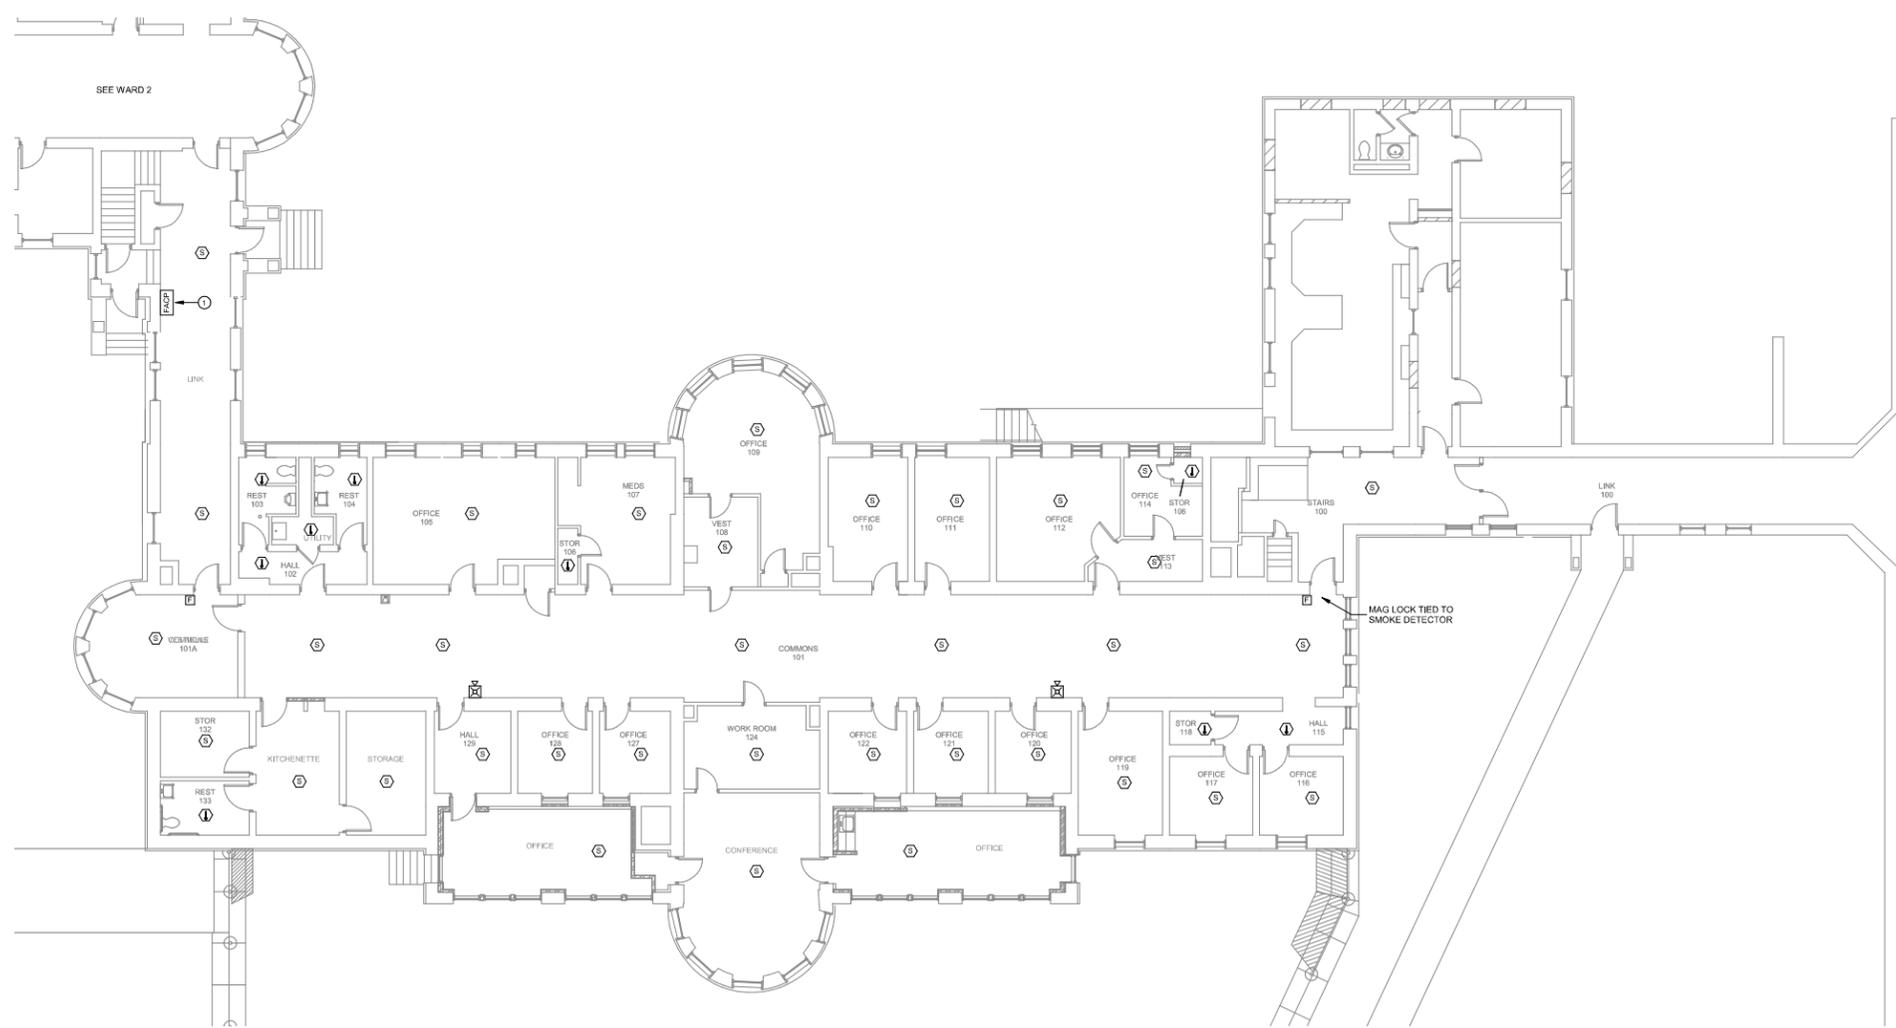

1 MAIN - 1ST FLOOR - WARD 1 - DEMO
1/8" = 1'-0"

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. WORK SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

- KEYNOTES**
- 1 EXISTING CONVENTIONAL FCI FC-72 FIRE DETECTION AND ALARM CONTROL PANEL SERVING ALL OF BUILDING "A". BIDDING CONTRACTOR SHALL SET NEW ADDRESSABLE CONTROL PANEL ADJACENT. IF THERE ARE SPACE CONSTRAINTS THAT WILL NOT ALLOW THIS, PROVIDE A TEMPORARY PLYWOOD WALL TO MOUNT NEW CONTROL PANEL. PROVIDE TEMPORARY ADDRESSABLE INPUT MODULES AND ASSOCIATED WIRING TO MONITOR ALL OF THE EXISTING CONVENTIONAL ZONES AND DEVICES ILLUSTRATED ON THIS DEMOLITION PLAN. PROVIDE A COORDINATED CUTOVER OF EACH ZONE FROM THE EXISTING CONTROL PANEL TO THE NEW. ONCE ALL OF THE ZONES ARE MIGRATED, DEMOLISH THE OLD CONTROL PANEL, BATTERIES, POWER SUPPLIES AND FIBER OPTIC CONNECTIVITY. ONCE THE AREA IS CLEARED OF EXISTING HEAD END EQUIPMENT, MOUNT NEW CONTROL PANEL IN A PERMANENT LOCATION.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE
FIRE ALARM REPLACEMENT
 1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS
Revision Date


Drawing Name:
1ST FLOOR - WARD 1 - DEMOLITION

Drawing #:
ED103

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
LEVEL 2	LIVING	LIVING	LIVING
LEVEL 1	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
BASEMENT	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECHKITCHEN
	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

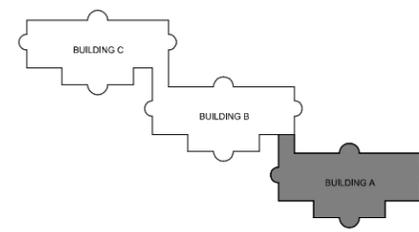


MAIN/ADMINISTRATION - SOUTH B 1ST FLOOR

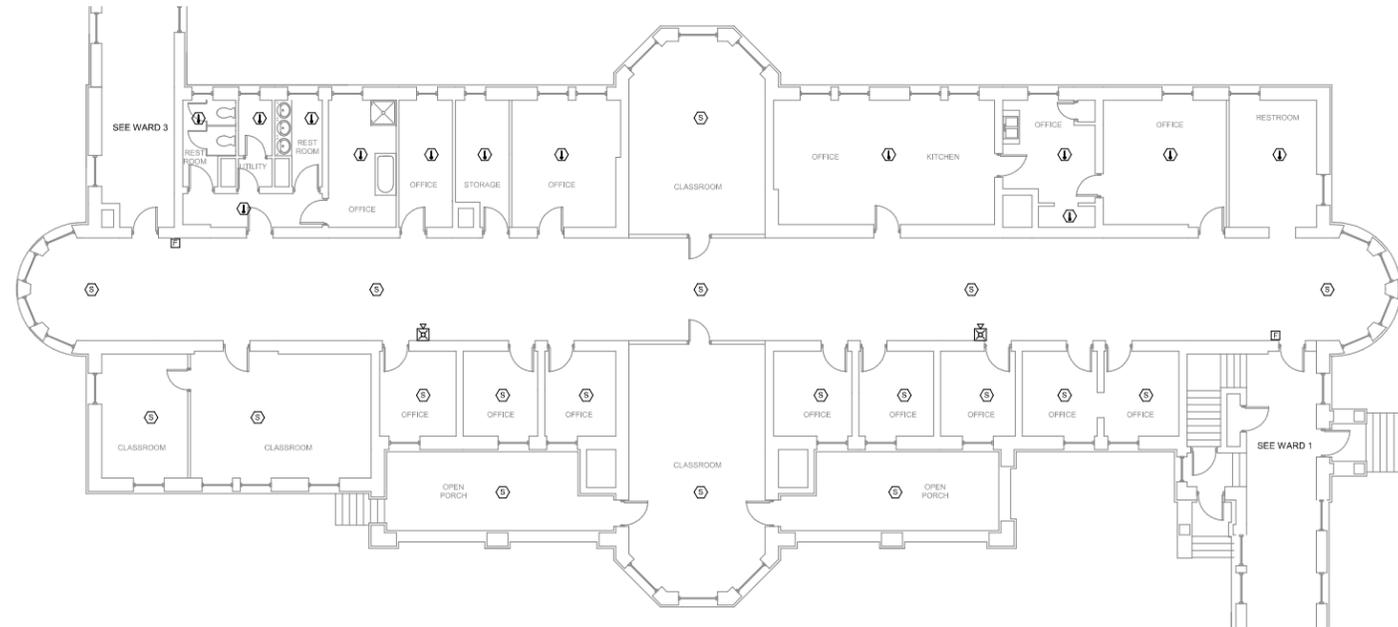

① MAIN-1ST FLOOR-WARD 2- DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7 LIVING	WARD 8 LIVING	WARD 9 LIVING
LEVEL 2	WARD 4 LIVING	WARD 5 LIVING	WARD 6 LIVING
LEVEL 1	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECHKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

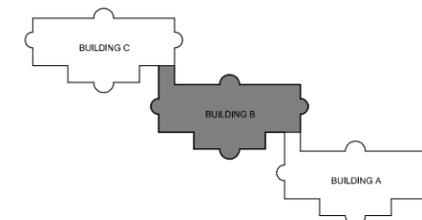

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.**

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT


1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS
Revision Date

Drawing Name:
1ST FLOOR - WARD 2 -
DEMOLITION


Drawing #:
ED104

MAIN/ADMINISTRATION - SOUTH C 1ST FLOOR

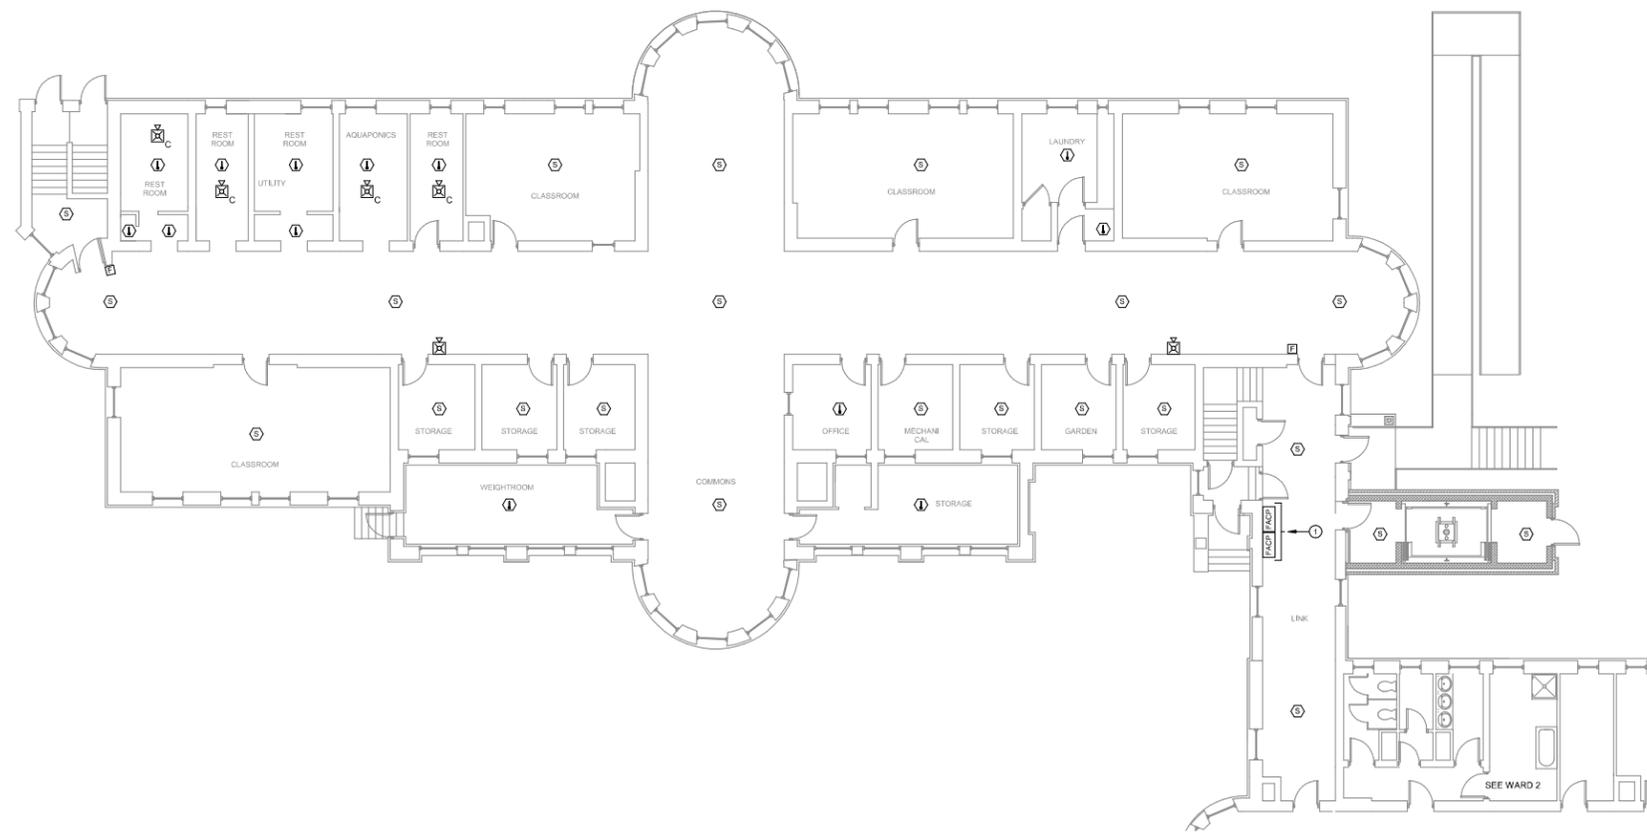

1 MAIN-1ST FLOOR - WARD 3 - DEMO
1/8" = 1/4"

	BUILDING A	BUILDING B	BUILDING C
ABOVE	WARD 7	WARD 8	WARD 9
ATTIC	WARD 7	WARD 8	WARD 9
LEVEL 3	LIVING	LIVING	LIVING
	WARD 4	WARD 5	WARD 6
LEVEL 2	LIVING	LIVING	LIVING
	WARD 1	WARD 2	WARD 3
LEVEL 1	OFFICE	OFFICE/CLASS	REC/KITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

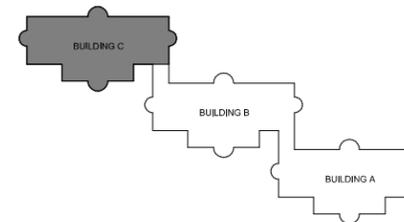

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET ED01 TO MINIMIZE SYSTEM OUTAGES.

- KEYNOTES**
- EXISTING CONVENTIONAL FCI FC-72 FIRE DETECTION AND ALARM CONTROL PANEL SERVING ALL OF BUILDING "B" AND "C". BIDDING CONTRACTOR SHALL SET NEW ADDRESSABLE CONTROL PANELS ADJACENT, IF THERE ARE SPACE CONSTRAINTS THAT WILL NOT ALLOW THIS, PROVIDE A TEMPORARY PLYWOOD WALL TO MOUNT NEW CONTROL PANEL. PROVIDE TEMPORARY ADDRESSABLE INPUT MODULES AND ASSOCIATED WIRING TO MONITOR ALL OF THE EXISTING CONVENTIONAL ZONES AND DEVICES. ILLUSTRATED ON THIS DEMOLITION PLAN. PROVIDE A COORDINATED CUTOVER OF EACH ZONE FROM THE EXISTING CONTROL PANEL, TO THE NEW. ONCE ALL OF THE ZONES ARE MIGRATED, DEMOLISH THE OLD CONTROL PANEL, BATTERIES, POWER SUPPLIES AND FIBER OPTIC CONNECTIVITY. ONCE THE AREA IS CLEARED OF EXISTING HEAD END EQUIPMENT, MOUNT NEW CONTROL PANEL IN A PERMANENT LOCATION.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020


CONSTRUCTION
DOCUMENTS

Revision Date

Drawing Name:
1ST FLOOR - WARD 3 -
DEMOLITION

Drawing #:
ED105

MAIN/ADMINISTRATION - SOUTH A 2ND FLOOR

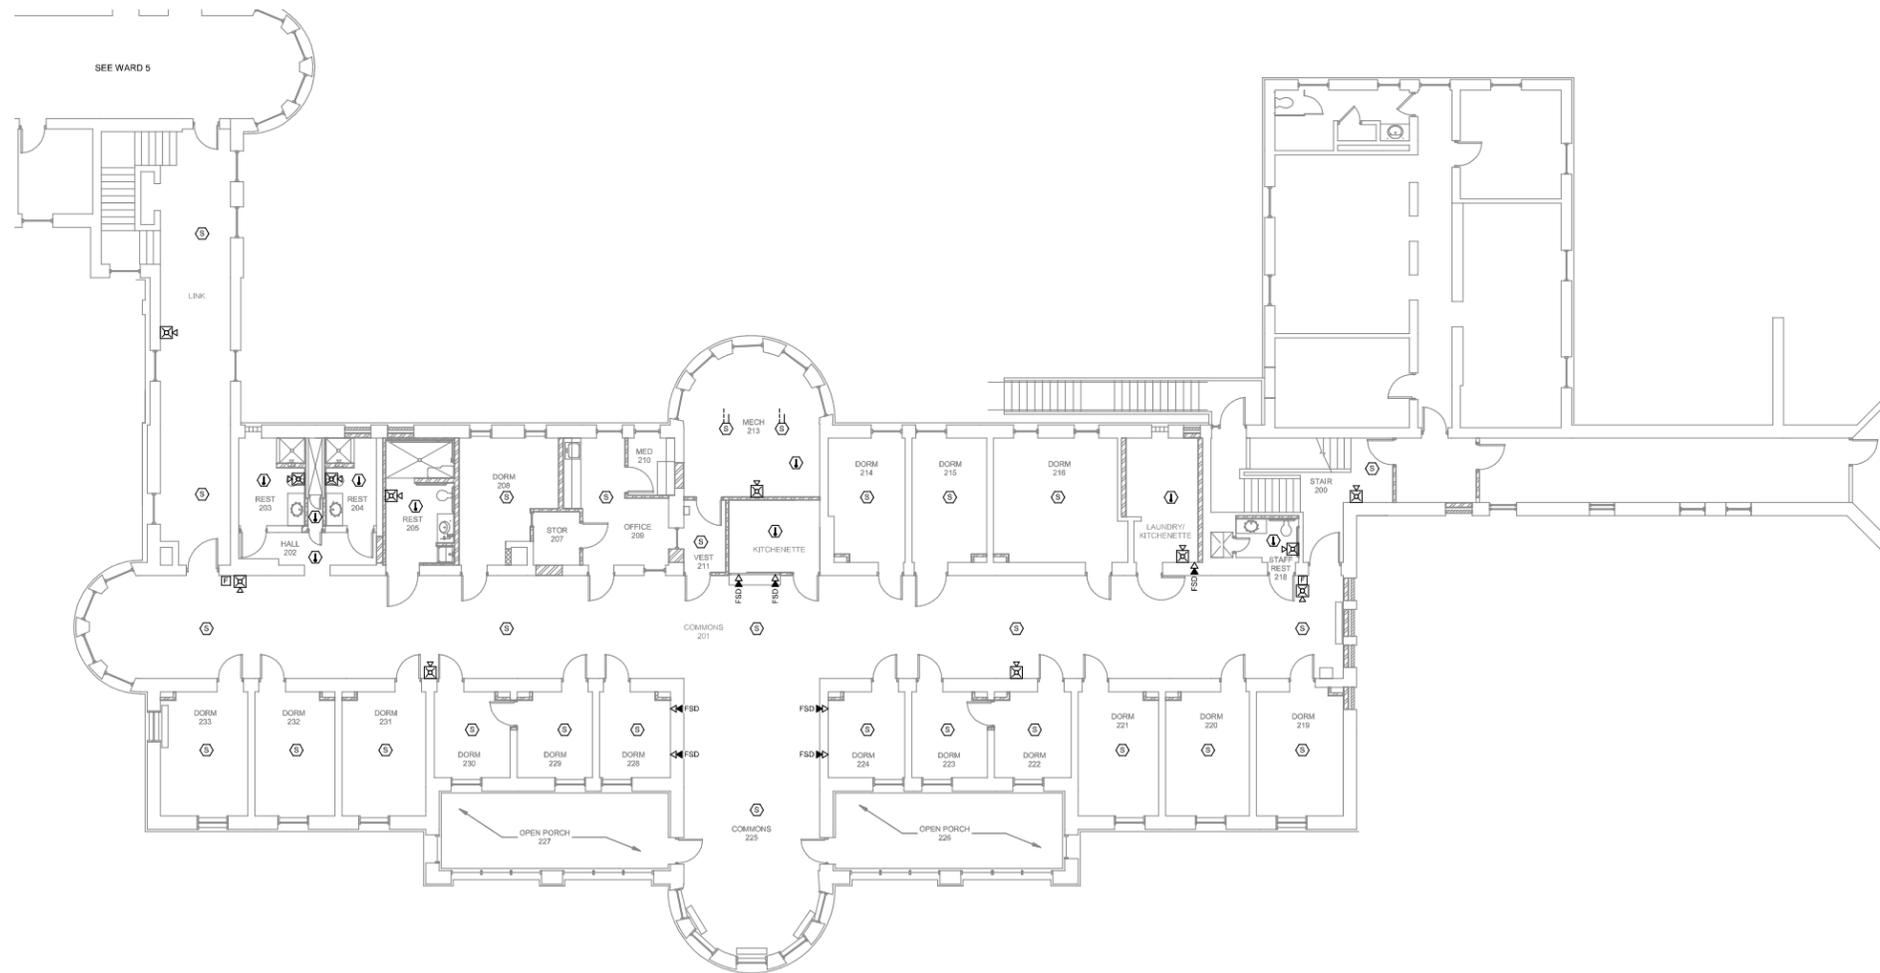

1 MAIN - 2ND FLOOR - WARD 4 - DEMO
1/8" = 1/4"

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET ED01 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012


Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
2ND FLOOR - WARD 4 -
DEMOLITION

Drawing #:
ED106

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
LEVEL 2	LIVING	LIVING	LIVING
LEVEL 1	WARD 4	WARD 5	WARD 6
LEVEL 0	LIVING	LIVING	LIVING
LEVEL -1	WARD 1	WARD 2	WARD 3
BASEMENT	OFFICE	OFFICE/CLASS	RECKITCHEN
	STORAGE	STORAGE	STORAGE
	MECHANICAL	MECHANICAL	MECHANICAL
	OFFICES	INDUST. ARTS	

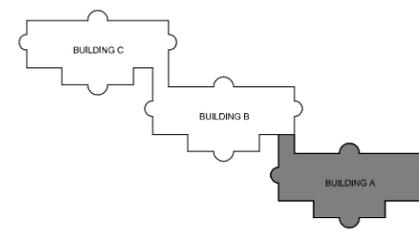


MAIN/ADMINISTRATION - SOUTH B 2ND FLOOR

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. WORK SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

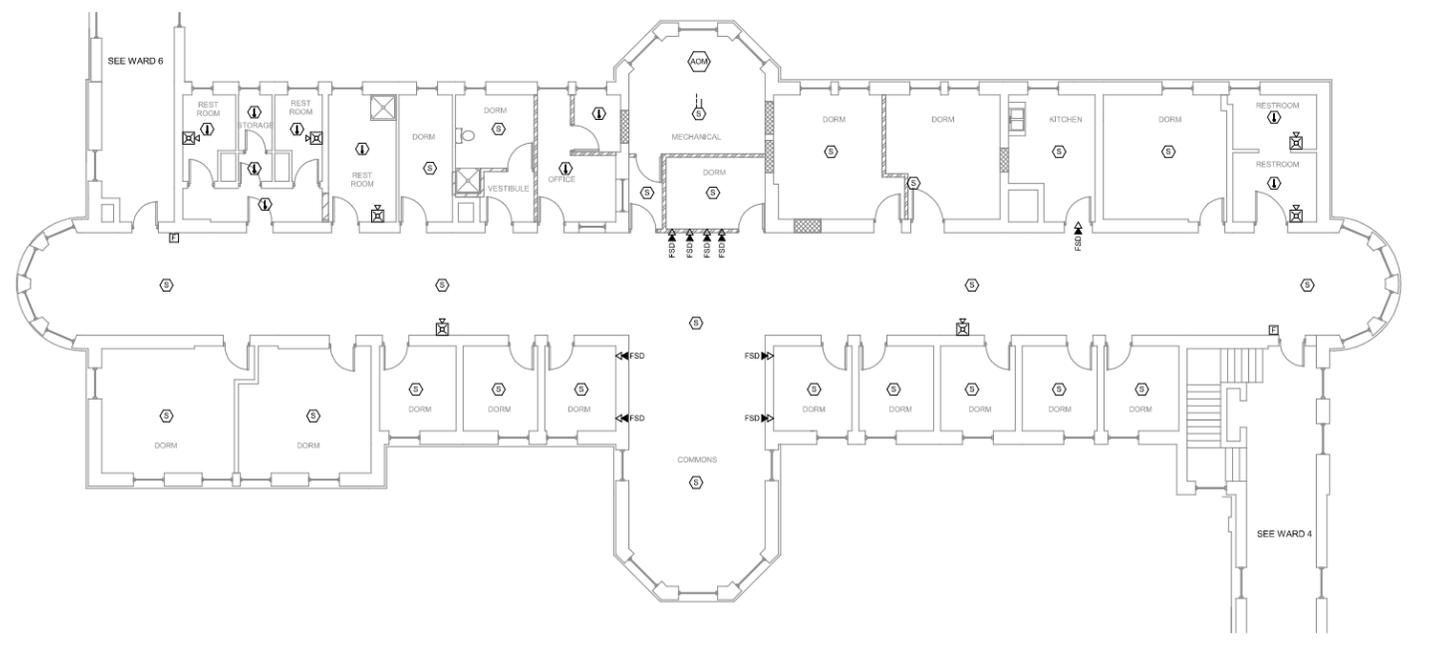

1 MAIN - 2ND FLOOR - WARD 5 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
	LIVING	LIVING	LIVING
LEVEL 2	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
	OFFICE	OFFICE/CLASS	RECKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

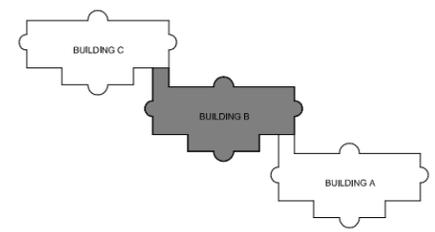

Project No: RFB914100-01
Date: 6/16/2020


CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
2ND FLOOR - WARD 5 - DEMOLITION


Drawing #:
ED107

MAIN/ADMINISTRATION - SOUTH C 2ND FLOOR

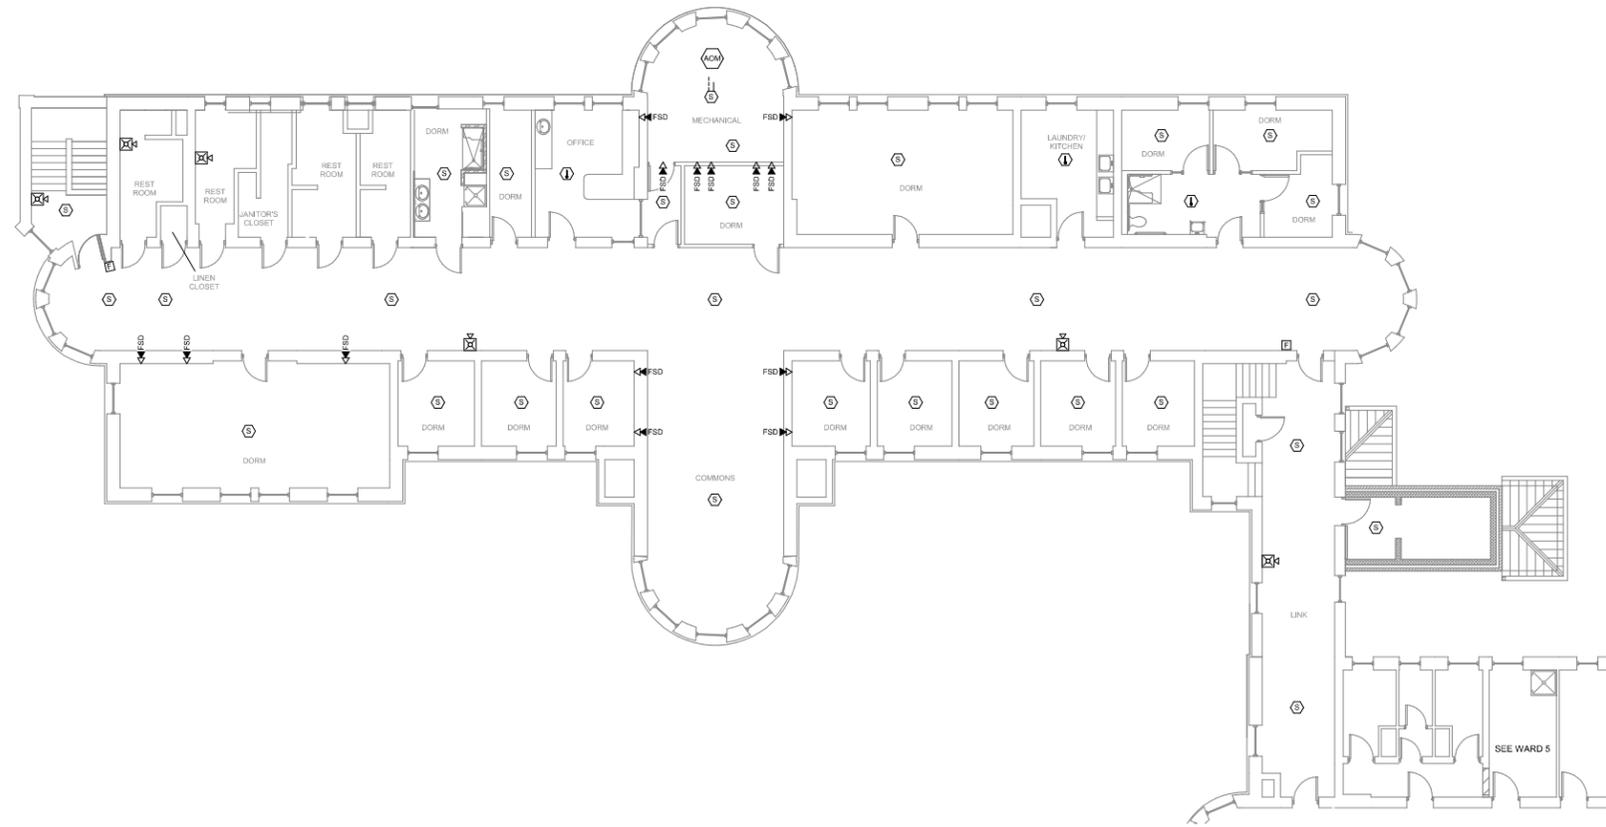

1 MAIN 2ND FLOOR - WARD 8 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
	LIVING	LIVING	LIVING
LEVEL 2	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
	OFFICE	OFFICE/CLASS	REC/KITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

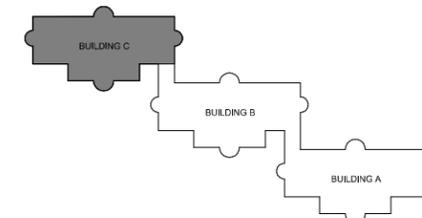

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020


CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
2ND FLOOR - WARD 6 - DEMOLITION


Drawing #:
ED108

MAIN/ADMINISTRATION - SOUTH A 3RD FLOOR

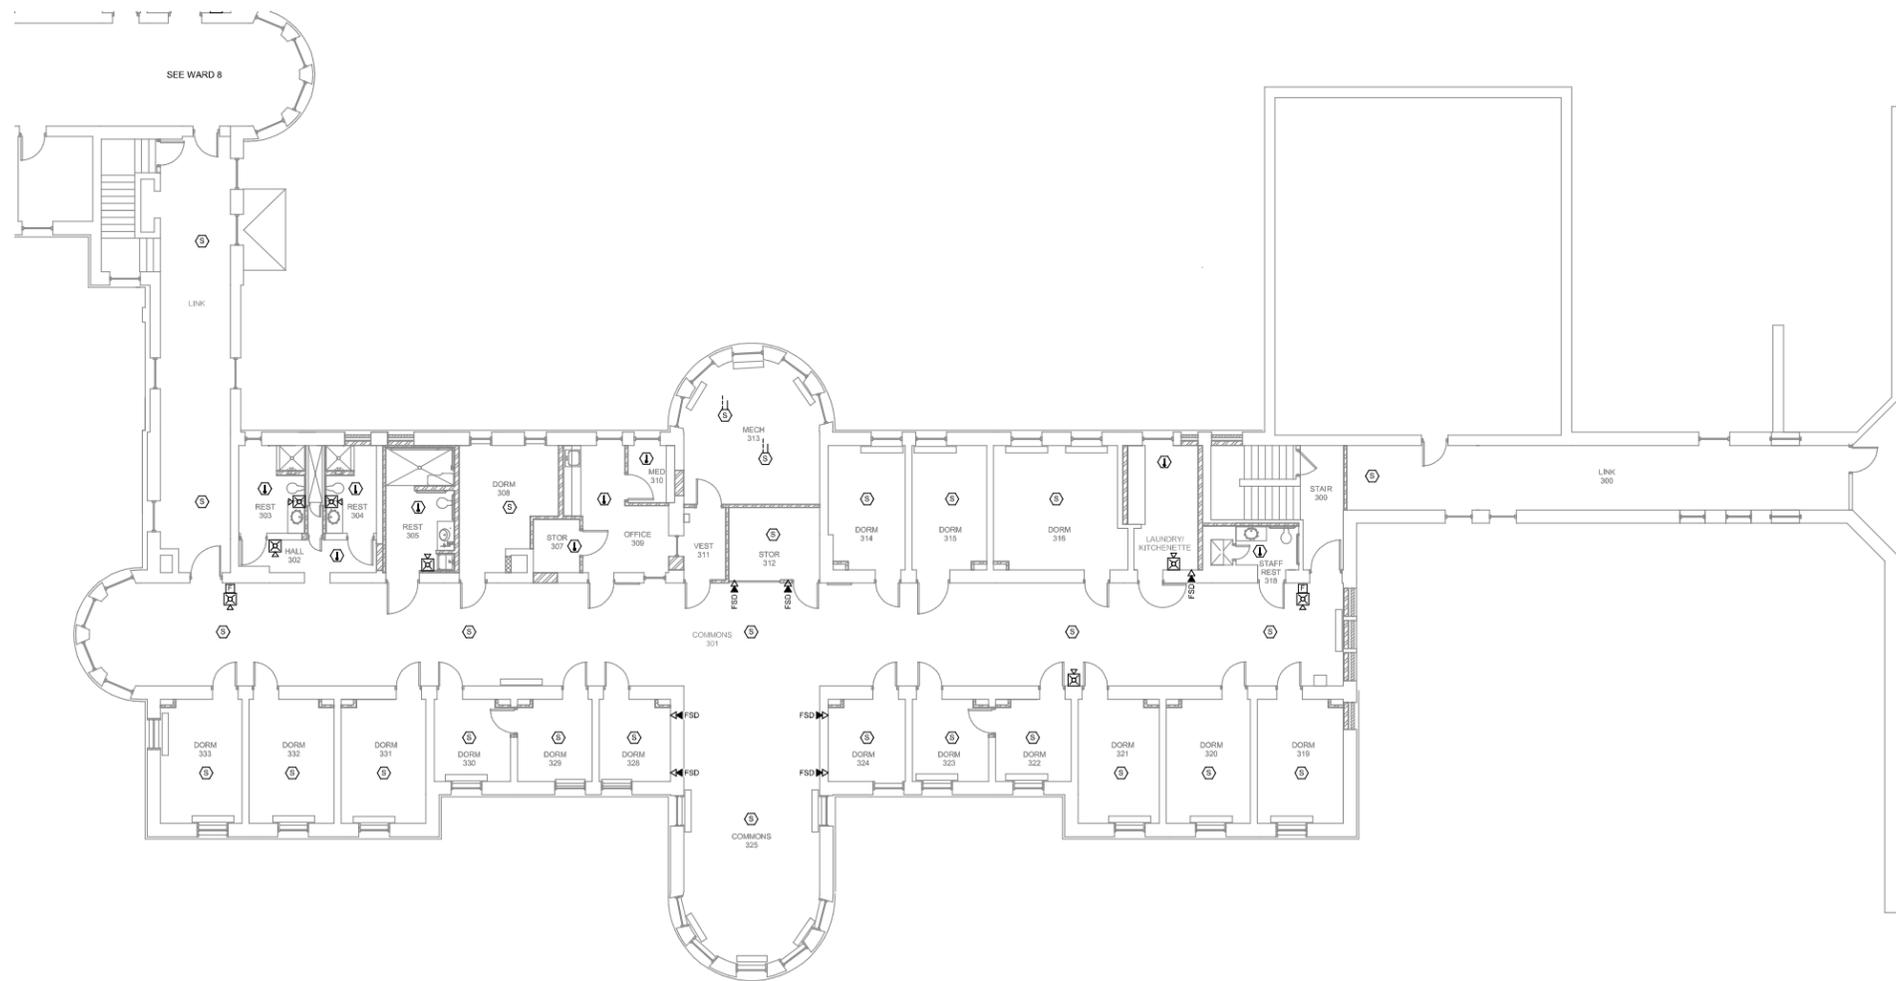

1 MAIN - 3RD FLOOR - WARD 7 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
LEVEL 2	LIVING	LIVING	LIVING
LEVEL 1	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
BASEMENT	OFFICE STORAGE MECHANICAL OFFICES	OFFICE/CLASS STORAGE MECHANICAL	RECKITCHEN STORAGE MECHANICAL INDUST. ARTS

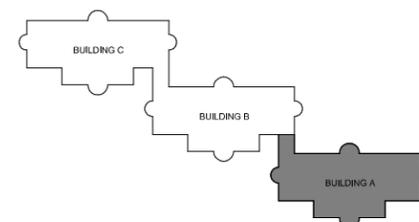

KEY PLAN WARD 7
1/2" = 1'-0"

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNERS REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
3RD FLOOR - WARD 7 - DEMOLITION

Drawing #:
ED109


MAIN/ADMINISTRATION - SOUTH B 3RD FLOOR

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

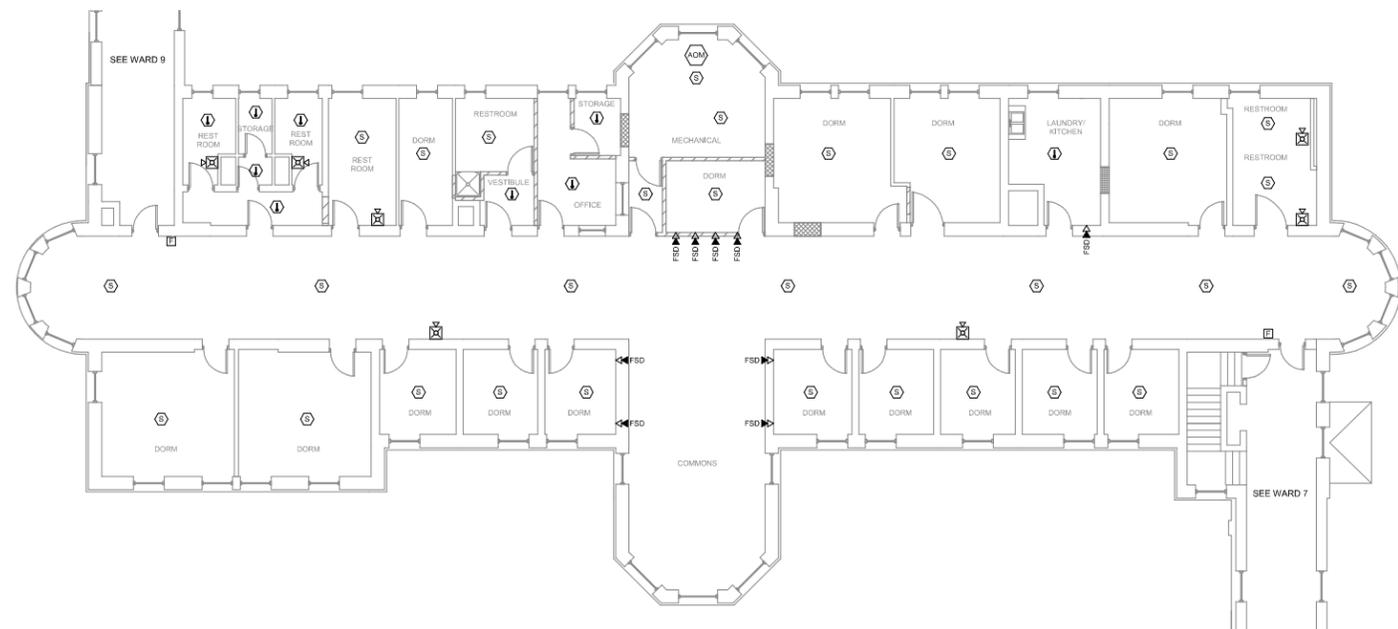

1 MAIN - 3RD FLOOR - WARD 8 - DEMO
1/8" = 1'-0"


	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
	LIVING	LIVING	LIVING
LEVEL 2	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
	OFFICE	OFFICE/CLASS	RECKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

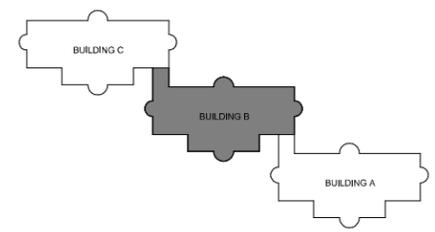

Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS
Revision Date


Drawing Name:
3RD FLOOR - WARD 8 - DEMOLITION
Drawing #:
ED110

MAIN/ADMINISTRATION - SOUTH C 3RD FLOOR

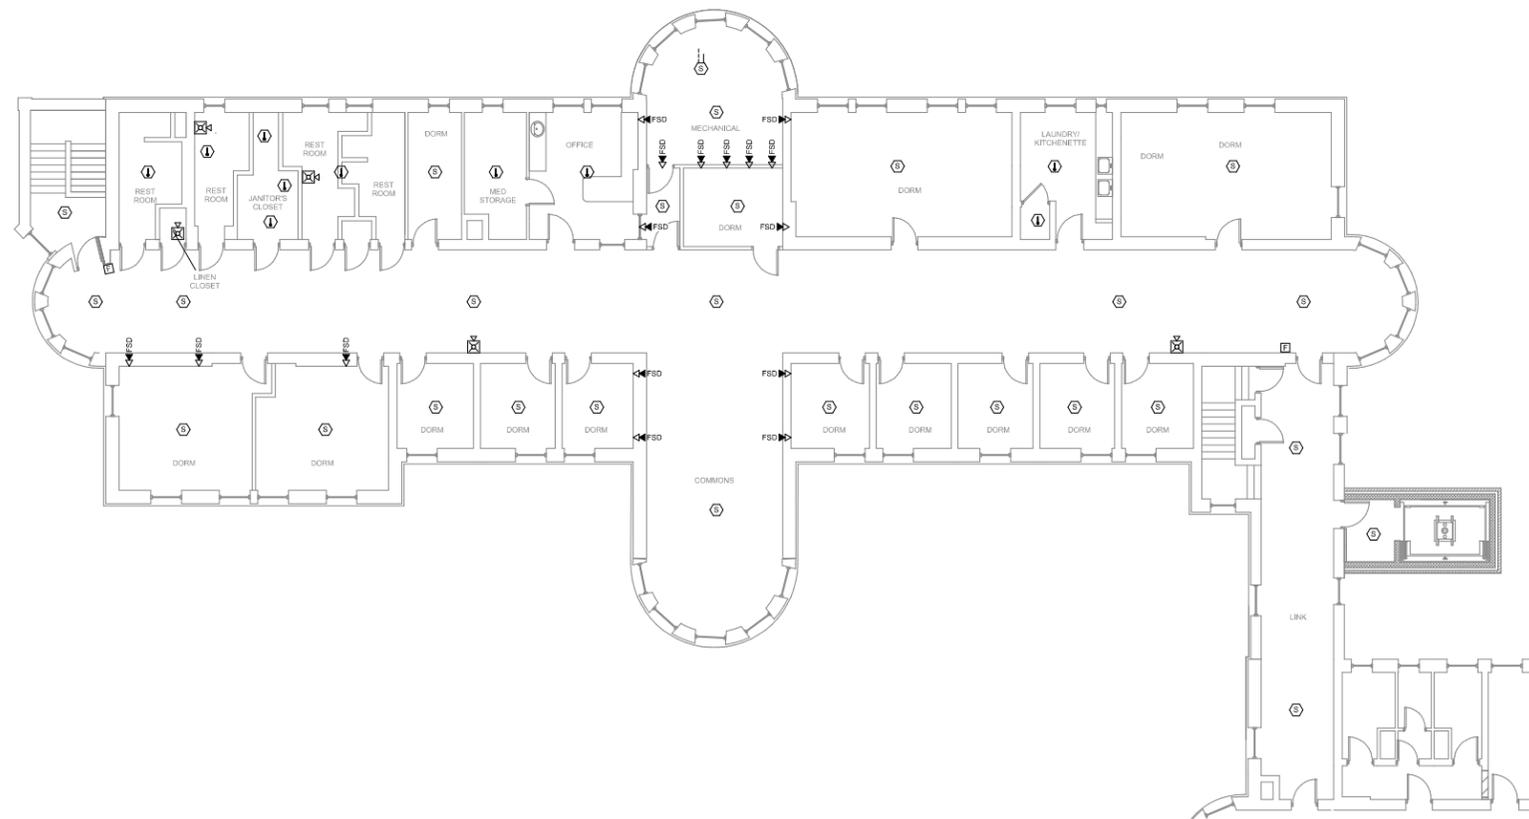

1 MAIN - 3RD FLOOR - WARD 9 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
LEVEL 2	LIVING	LIVING	LIVING
LEVEL 1	WARD 4	WARD 5	WARD 6
LEVEL 1	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
BASEMENT	OFFICE	OFFICE/CLASS STORAGE	RECKITCHEN STORAGE MECHANICAL INDUST. ARTS

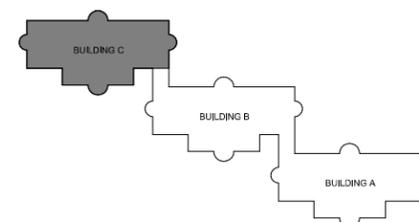

- ELECTRICAL DEMOLITION NOTES**
- DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
3RD FLOOR - WARD 9 - DEMOLITION

Drawing #:
ED111


MAIN/ADMINISTRATION - SOUTH A ATTIC

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET ED01 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

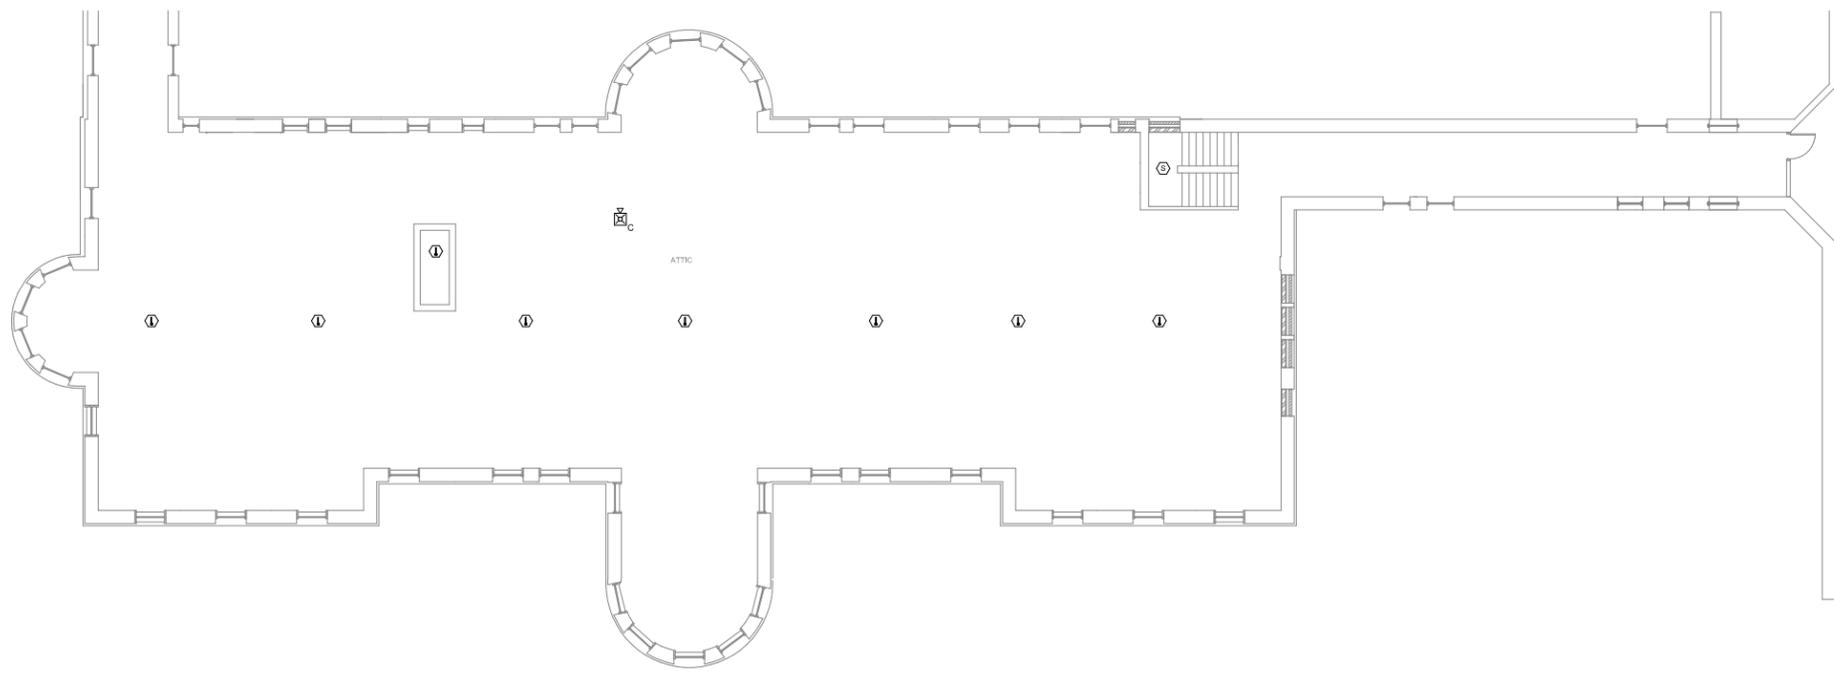

1 MAIN-ATTIC - WARD 7 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7	WARD 8	WARD 9
	LIVING	LIVING	LIVING
LEVEL 2	WARD 4	WARD 5	WARD 6
	LIVING	LIVING	LIVING
LEVEL 1	WARD 1	WARD 2	WARD 3
	OFFICE	OFFICE/CLASS	RECHITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

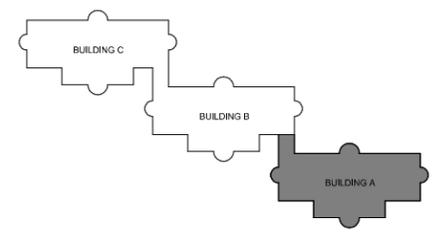


Project No: RFB914100-01
Date: 6/16/2020
CONSTRUCTION DOCUMENTS
Revision Date

Drawing Name:
ATTIC - WARD 7 - DEMOLITION


Drawing #:
ED112

MAIN/ADMINISTRATION - SOUTH B ATTIC

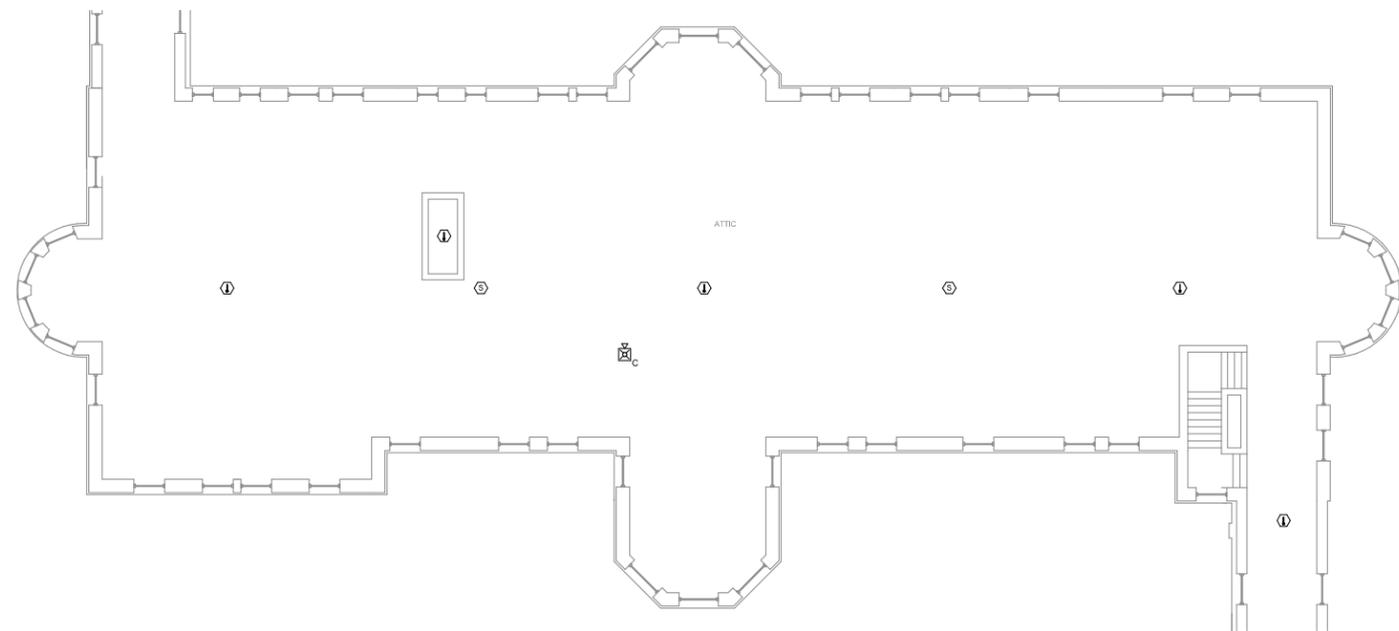

MAIN-ATTIC-WARD 8-DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7 LIVING	WARD 8 LIVING	WARD 9 LIVING
LEVEL 2	WARD 4 LIVING	WARD 5 LIVING	WARD 6 LIVING
LEVEL 1	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECHKITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

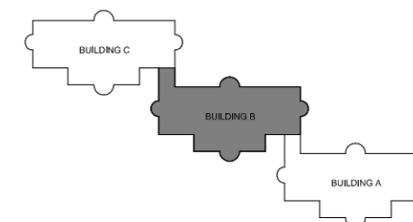

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNERS REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. **ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.**

KCL

ENGINEERING

300 4th Street,
West Des Moines,
Iowa 50265

info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision	Date
----------	------

Drawing Name:
**ATTIC - WARD 8 -
DEMOLITION**

Drawing #:
ED113


MAIN/ADMINISTRATION - SOUTH C ATTIC

- ELECTRICAL DEMOLITION NOTES**
- A. DEMOLITION DRAWINGS PRESENT LAYOUT OF EXISTING CONDITIONS AND MAJOR FIRE ALARM ITEMS. THEY ARE NOT TO BE CONSTRUED AS COMPLETE IN REPRESENTATION OF ACCESSORIES AND INCIDENTALS TO BE REMOVED, REPLACED, OR REWORKED. DRAWINGS ARE BASED ON FIELD OBSERVATION AND ORIGINAL DRAWINGS. ADDITIONAL COMPONENTS MAY EXIST WHICH DO NOT SHOW, AND SUCH ITEMS SHALL BE DEALT WITH IN A MANNER SIMILAR TO THOSE ITEMS WHICH DO SHOW. NOR SHOULD ACCESSIBILITY BE INFERRED. THE CONTRACTOR IS RESPONSIBLE TO FAMILIARIZE THEMSELVES WITH THE BUILDING AND EXISTING CONDITIONS. PRIOR TO THE SUBMITTING OF A BID FOR THIS PROJECT.
 - B. WIRING AND DEVICES SHALL BE REMOVED. WIRING AND DEVICES SHALL BE NEW UNLESS SPECIFICALLY NOTED OTHERWISE. REPLACEMENT WILL NOT COMPLETELY BE A 1:1 REPLACEMENT OF DEVICES. REUSE EXISTING CONDUIT WHERE POSSIBLE.
 - C. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - D. REMOVE SURFACE RACEWAY WHERE NOT BEING REUSED. THE INTENT IS TO PROVIDE CEILING DEVICES WHERE EVER POSSIBLE TO ELIMINATE WALL MOUNTED DEVICES. PROVIDE COVERPLATES FOR UNUSED EXISTING WALL ROUGH-INS.
 - E. ALL EXISTING FIELD DEVICES ILLUSTRATED AND ASSOCIATED WIRING SHALL BE REMOVED IN THEIR ENTIRETY. PROVIDE A GRACEFUL AND COORDINATED CUTOVER PLAN AS OUTLINED ON SHEET E001 TO MINIMIZE SYSTEM OUTAGES.

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938


CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

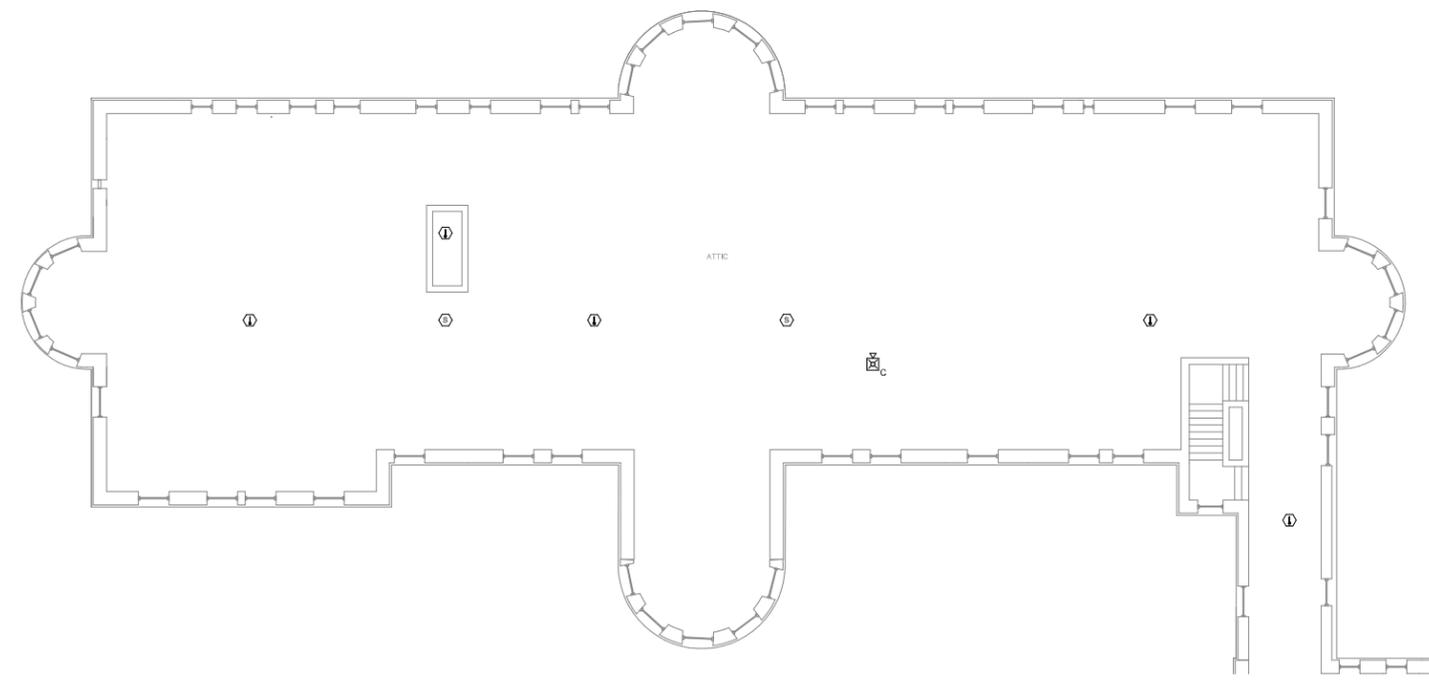

⊕ MAIN - ATTIC - WARD 9 - DEMO
1/8" = 1'-0"

	BUILDING A	BUILDING B	BUILDING C
ATTIC	ABOVE WARD 7 ATTIC	ABOVE WARD 8 ATTIC	ABOVE WARD 9 ATTIC
LEVEL 3	WARD 7 LIVING	WARD 8 LIVING	WARD 9 LIVING
LEVEL 2	WARD 4 LIVING	WARD 5 LIVING	WARD 6 LIVING
LEVEL 1	WARD 1 OFFICE	WARD 2 OFFICE/CLASS	WARD 3 RECHITCHEN
BASEMENT	STORAGE MECHANICAL OFFICES	STORAGE MECHANICAL	STORAGE MECHANICAL INDUST. ARTS

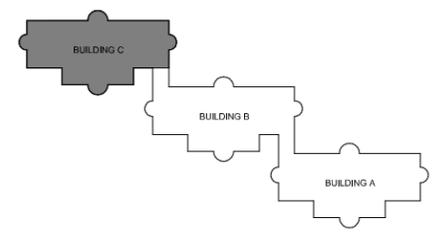



Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision	Date

Drawing Name:
ATTIC - WARD 9 - DEMOLITION

Drawing #:
ED114

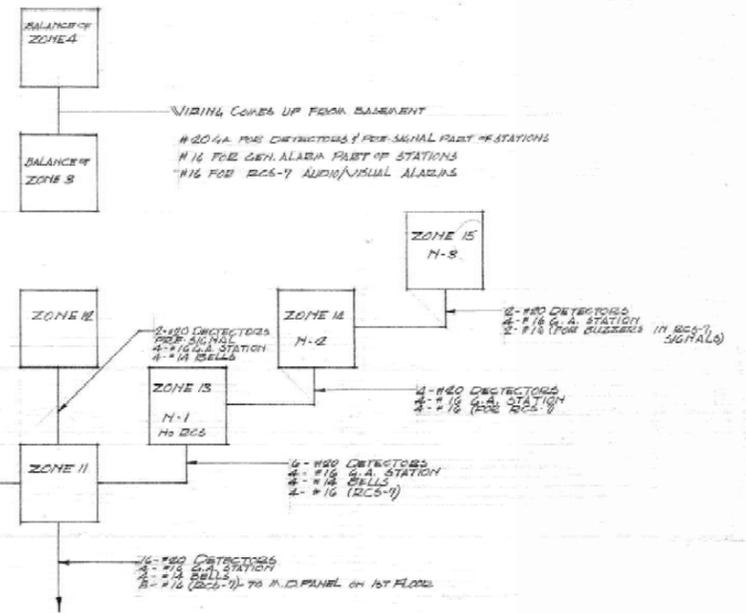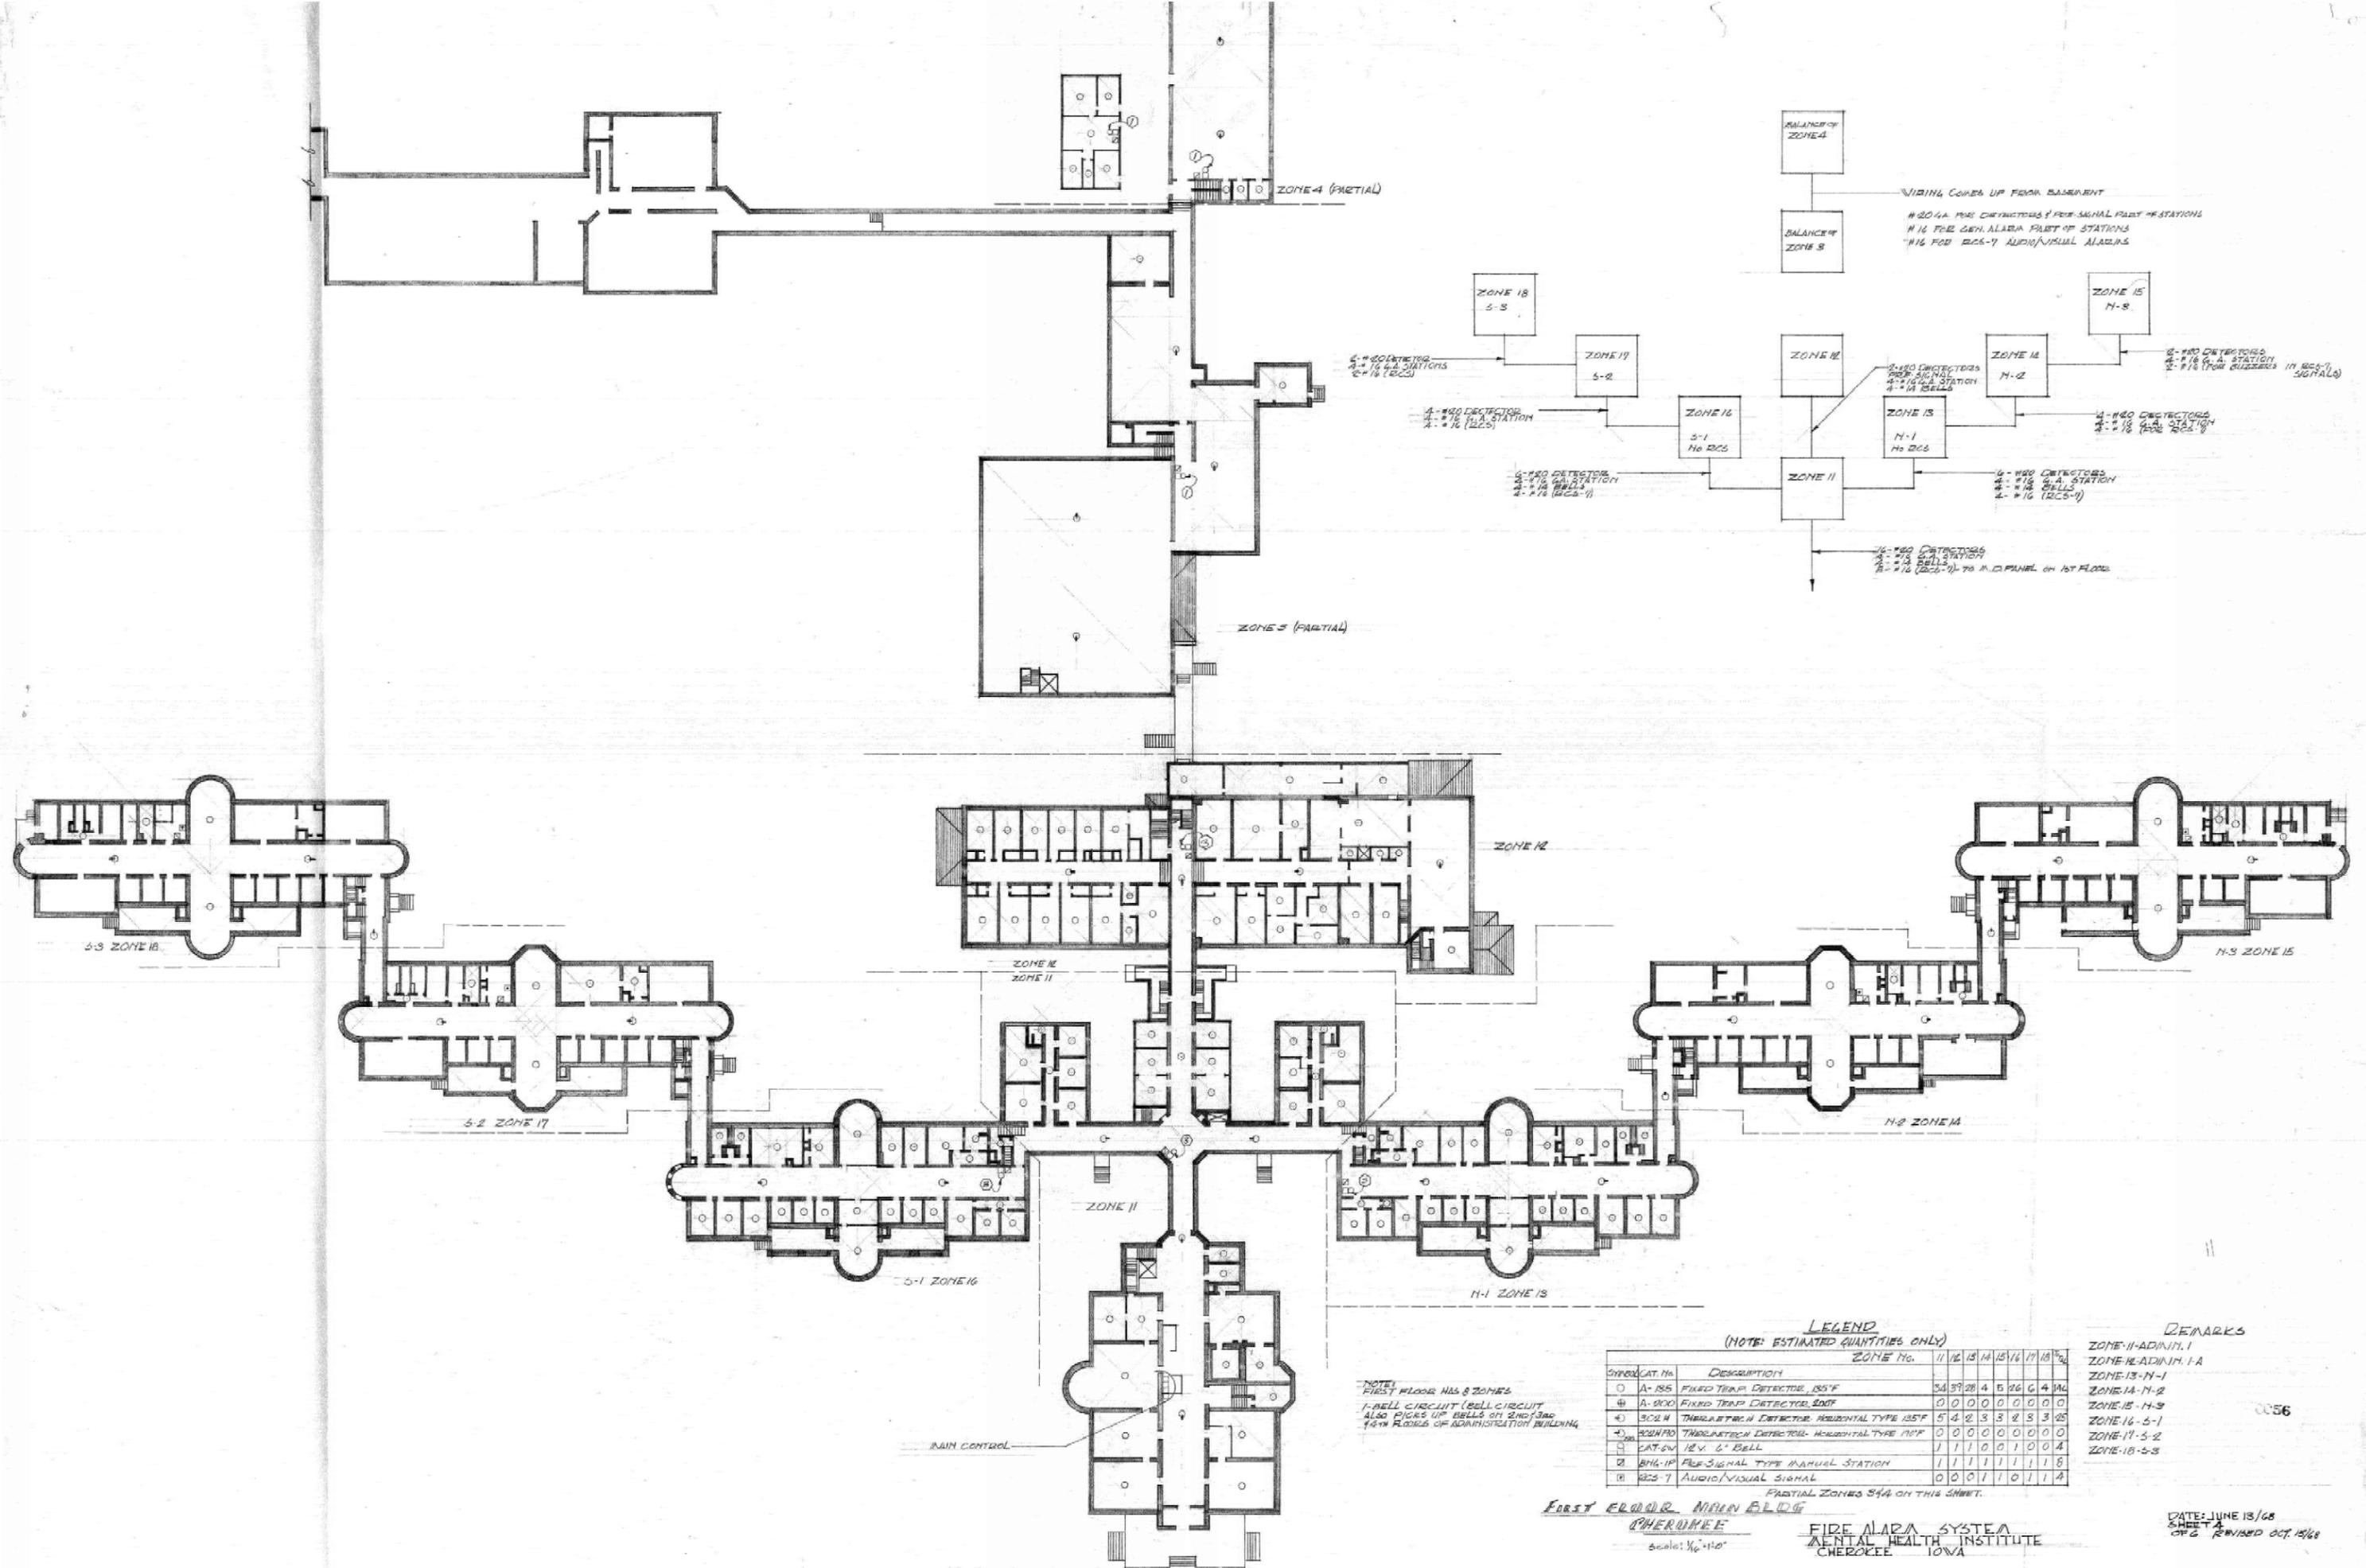


LEGEND
(NOTE: ESTIMATED QUANTITIES ONLY)

SYMBOL	DESCRIPTION	ZONE No.																		
		11	12	13	14	15	16	17	18	19	20									
○	A-185 FIXED TEMP. DETECTOR 135°F	34	37	28	4	5	26	6	4	16										
⊕	A-200 FIXED TEMP. DETECTOR 200°F	0	0	0	0	0	0	0	0	0										
⊕	302H THERMISTOR DETECTOR HORIZONTAL TYPE 135°F	5	4	2	3	3	2	3	3	25										
⊕	302HFD THERMISTOR DETECTOR HORIZONTAL TYPE 177°F	0	0	0	0	0	0	0	0	0										
⊕	18" x 6" BELL	1	1	1	0	0	1	0	0	4										
⊕	BH4-1P PWR SIGNAL TYPE MANUAL STATION	1	1	1	1	1	1	1	1	8										
⊕	RCS-7 AUDIO/VISUAL SIGNAL	0	0	0	1	1	0	1	1	4										

NOTE: FIRST FLOOR HAS 8 ZONES
1-BELL CIRCUIT (BELL CIRCUIT ALSO PICKS UP BELLS ON 2ND/3RD/4TH FLOORS OF ADMINISTRATION BUILDING)

REMARKS
ZONE 11-ADMIN. 1
ZONE 12-ADMIN. 1A
ZONE 13-N-1
ZONE 14-N-2
ZONE 15-H-3
ZONE 16-5-1
ZONE 17-5-2
ZONE 18-5-3

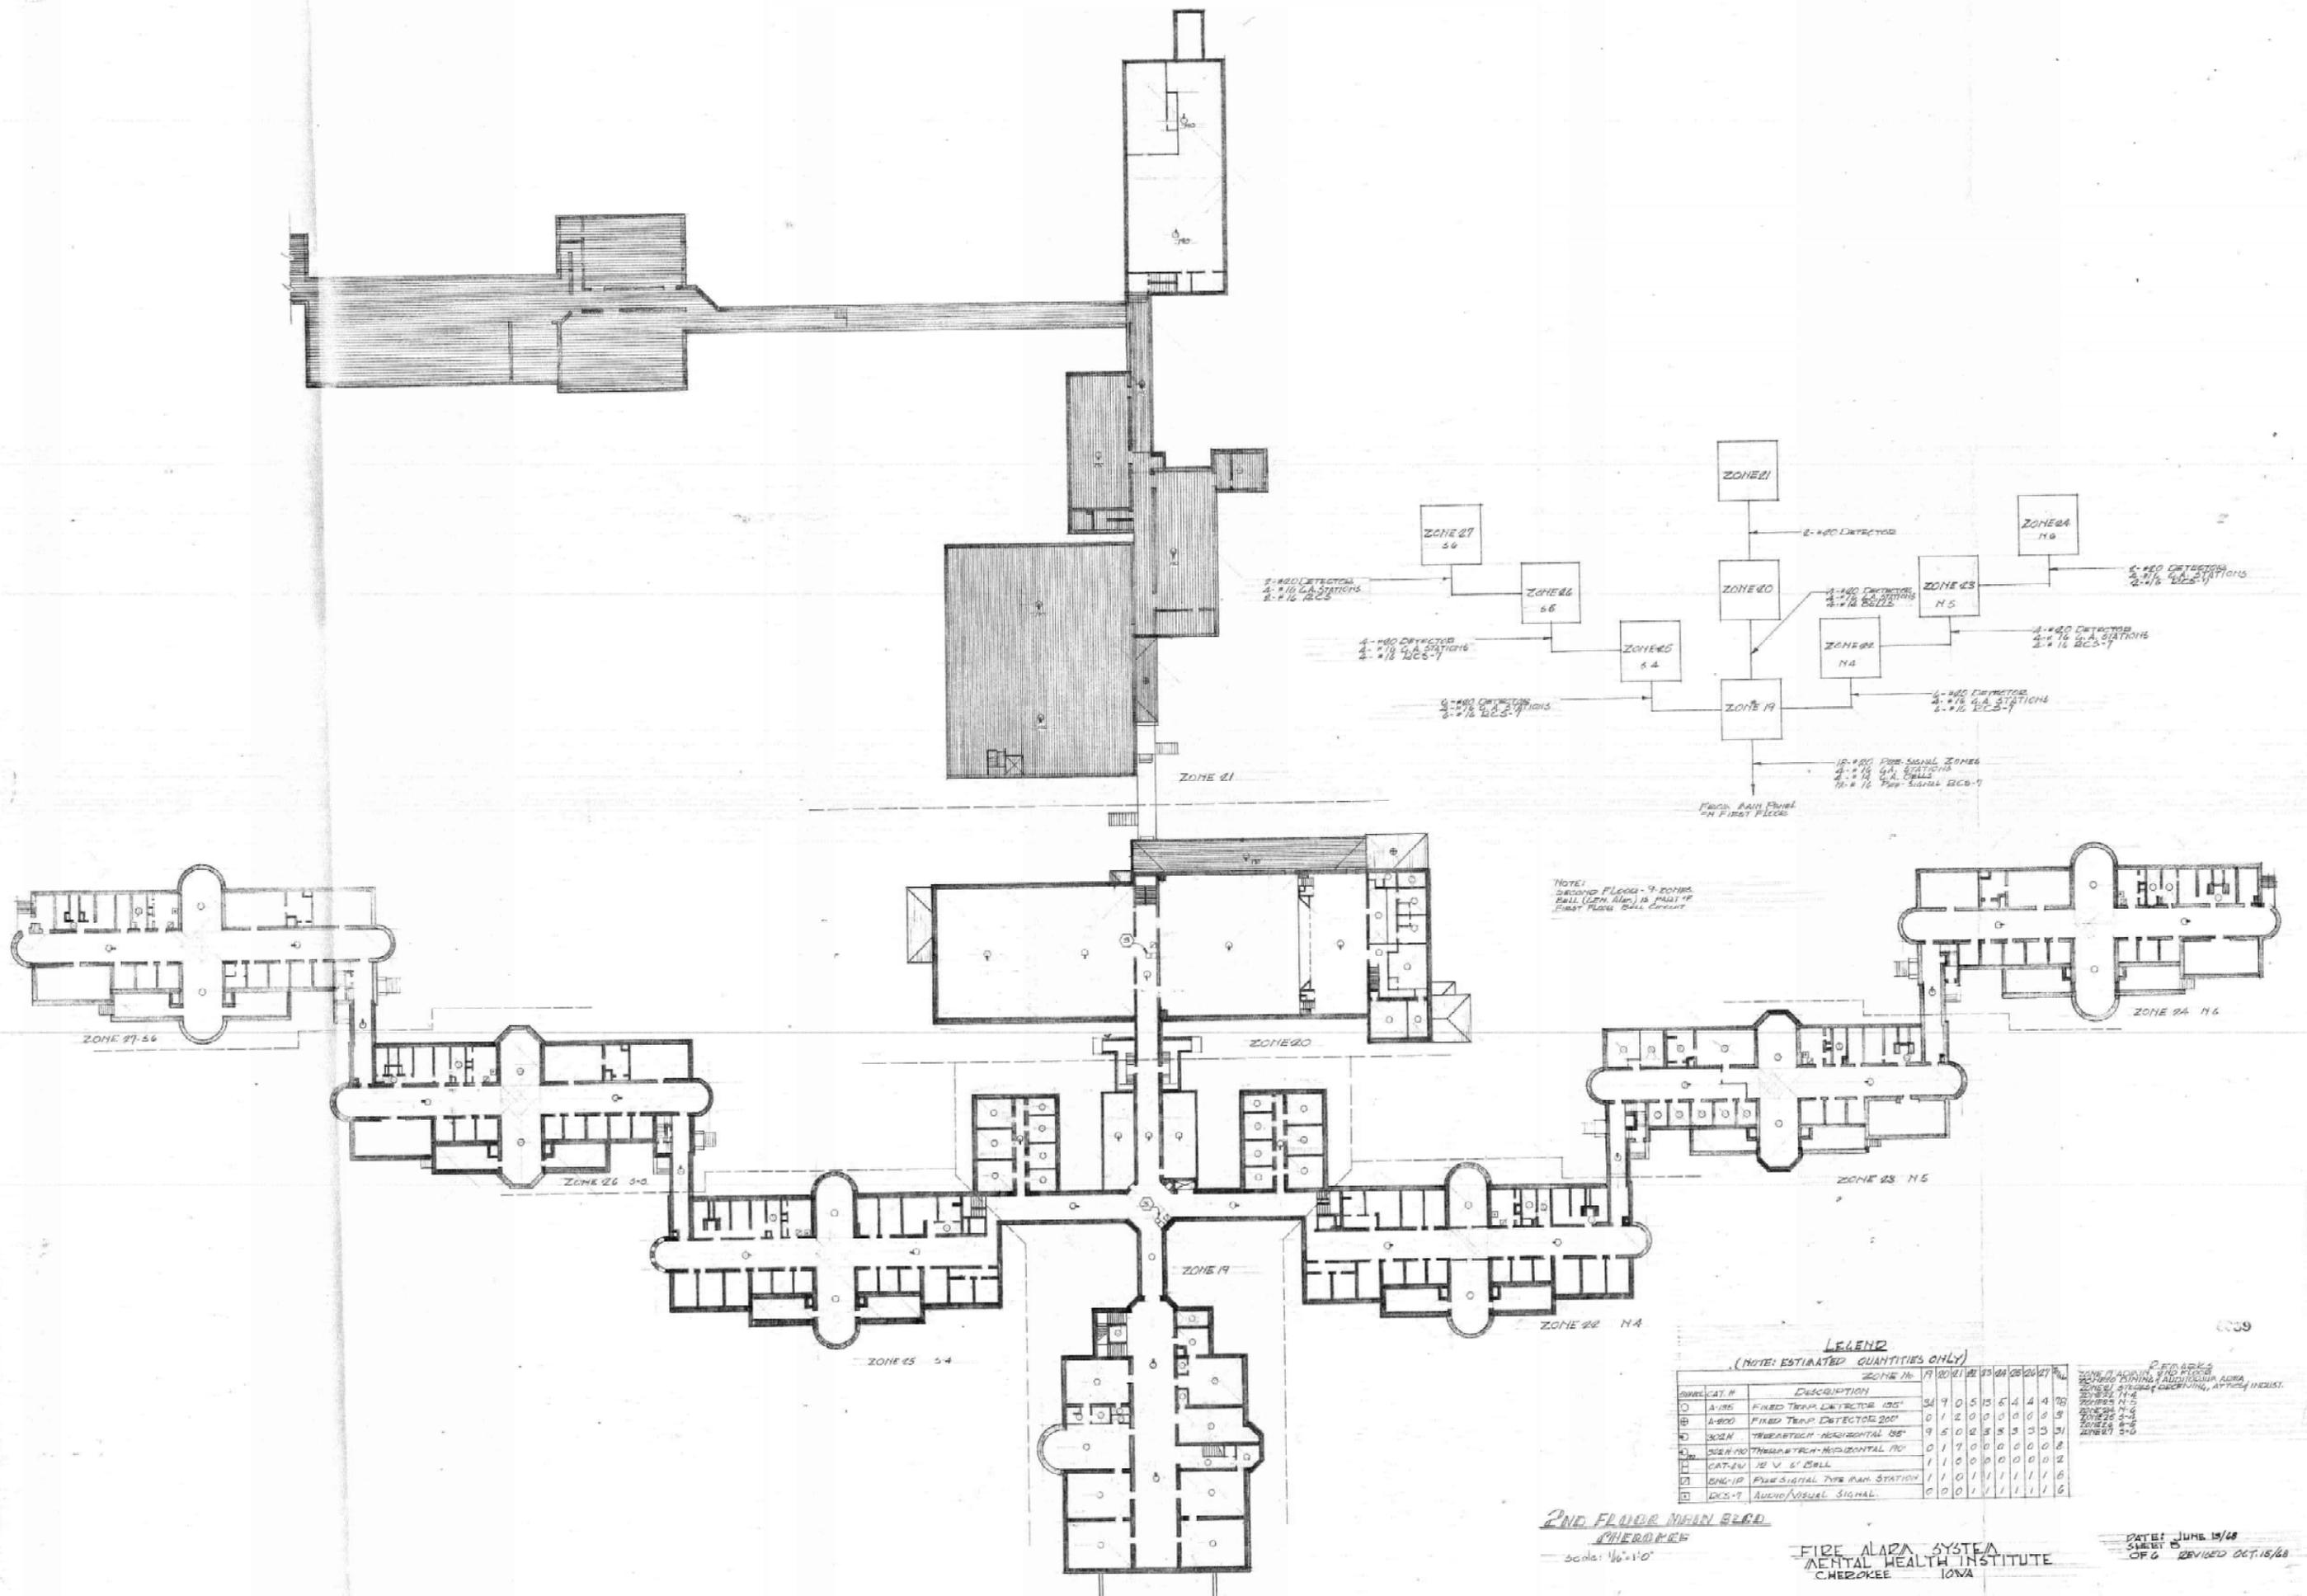

NOTE:
SECOND FLOOR - 9 ZONES
BALL (GEN. ALAR.) IS PART OF
FIRST FLOOR BALL CIRCUIT

LEGEND
(NOTE: ESTIMATED QUANTITIES ONLY)



SYMBOL	DESCRIPTION	ZONE NO.									
		19	20	21	22	23	24	25	26	27	28
⊙	A-105	34	9	0	5	13	5	4	4	4	10
⊕	A-200	0	1	2	0	0	0	0	0	0	0
⊖	302N	9	5	0	2	8	5	3	3	3	5
⊙	302N	0	1	0	0	0	0	0	0	0	0
⊕	CAT-10	1	1	0	0	0	0	0	0	0	0
⊖	CAT-10	1	1	0	0	0	0	0	0	0	0
⊙	DKS-7	0	0	0	1	1	1	1	1	1	6

REMARKS
ZONE 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

2ND FLOOR (MAIN BLDG)
CHEROKEE
Scale: 1/8"=1'-0"

FIRE ALAR SYSTEM
MENTAL HEALTH INSTITUTE
CHEROKEE IOWA

DATE: JUNE 19/68
SHEET 5
OF 6 REVISED OCT. 18/68

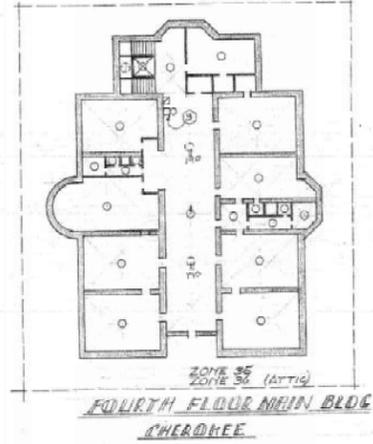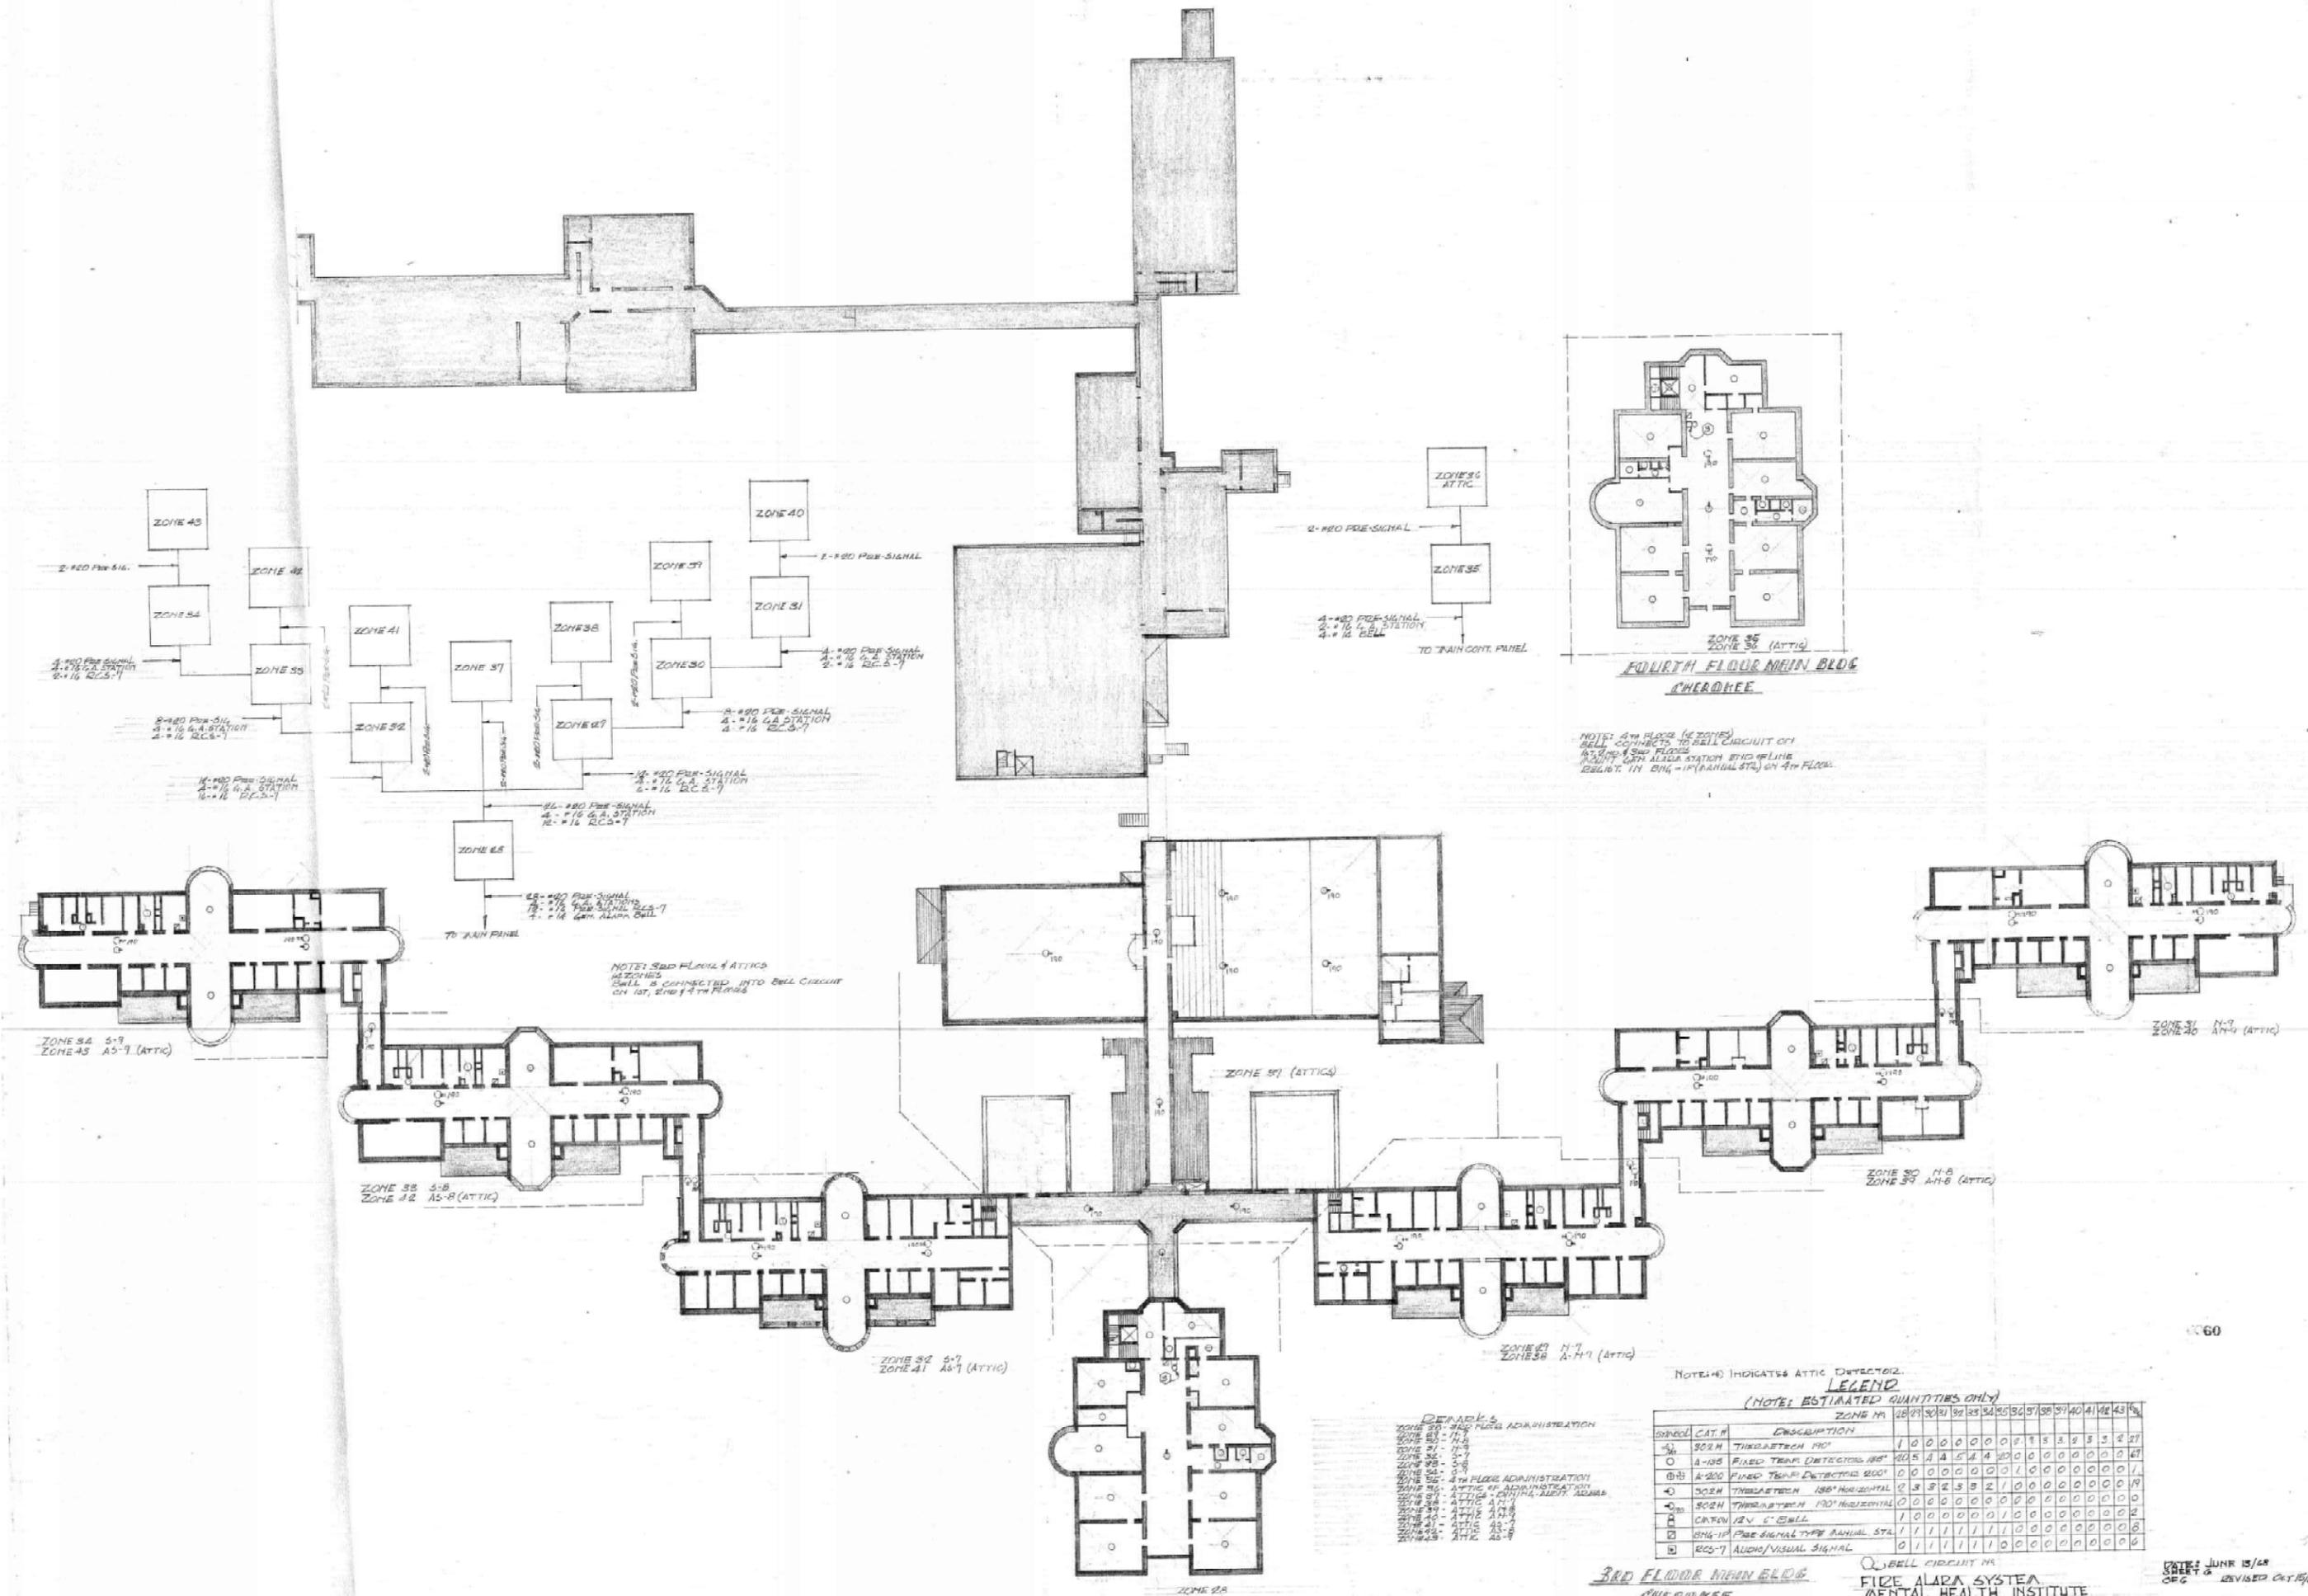

NOTE: 4TH FLOOR (6 ZONES) BELL CIRCUITS TO BELL CIRCUIT ON 1ST, 2ND & 4TH FLOORS. BELL CIRCUIT WITH ALARM STATION END OF LINE BELLS IN BNG-1P (RAILWAY STA.) ON 4TH FLOOR.

NOTE: 3RD FLOOR & ATTIC BELL CIRCUITS CONNECTED INTO BELL CIRCUIT ON 1ST, 2ND & 4TH FLOORS

- REMARKS**
- ZONE 38 - 3RD FLOOR ADMINISTRATION
 - ZONE 39 - H.B.
 - ZONE 40 - H.B.
 - ZONE 41 - H.B.
 - ZONE 42 - H.B.
 - ZONE 43 - H.B.
 - ZONE 44 - H.B.
 - ZONE 45 - 4TH FLOOR ADMINISTRATION
 - ZONE 38 ATTIC - OFFICE ADMINISTRATION
 - ZONE 39 ATTIC - OFFICE ADMINISTRATION
 - ZONE 40 ATTIC - OFFICE ADMINISTRATION
 - ZONE 41 ATTIC - OFFICE ADMINISTRATION
 - ZONE 42 ATTIC - OFFICE ADMINISTRATION
 - ZONE 43 ATTIC - OFFICE ADMINISTRATION
 - ZONE 44 ATTIC - OFFICE ADMINISTRATION
 - ZONE 45 ATTIC - OFFICE ADMINISTRATION

NOTE: 0 INDICATES ATTIC DETECTOR

LEGEND
(NOTE: ESTIMATED QUANTITIES ONLY)

SYMBOL	CAT. #	DESCRIPTION	ZONE 38	ZONE 39	ZONE 40	ZONE 41	ZONE 42	ZONE 43	ZONE 44	ZONE 45
⊙	302H	TRIAL-TECH 100'	1	0	0	0	0	0	0	0
○	A-105	FIXED TEMP. DETECTOR 100'	5	4	4	4	4	4	4	4
⊙	A-200	FIXED TEMP. DETECTOR 200'	0	0	0	0	0	0	0	0
⊙	302H	TRIAL-TECH 180' HORIZONTAL	2	3	2	3	2	1	0	0
⊙	302H	TRIAL-TECH 100' HORIZONTAL	0	0	0	0	0	0	0	0
⊙	CNTN	1/2" C. BELL	1	0	0	0	0	0	0	0
⊙	BNG-1P	PRE-SIGNAL TYPE RAILWAY STA.	1	1	1	1	1	0	0	0
⊙	RC-7	AUDIO/VISUAL SIGNAL	0	1	1	1	1	0	0	0

3RD FLOOR MAIN BLDG. CHEROKEE

FIRE ALARM SYSTEM MENTAL HEALTH INSTITUTE CHEROKEE IOWA

DRAWN BY: JUNE 15/68
REVISED BY: [Signature] OCT. 1968

GINZBERG - BASEMENT

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILINGS ARE GENERICALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - a. MHI - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING



1 GINZBERG - BASEMENT
1/8" = 1'-0"

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE
FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS

Revision Date

Drawing Name:
GINZBERG - BASEMENT

Drawing #:
E200

GINZBERG - 1ST FLOOR

KEYNOTES

1. EXISTING CONVENTIONAL FCI FC-72 FIRE DETECTION AND ALARM CONTROL PANEL, SERVING ALL OF GINZBERG. BIDDING CONTRACTOR SHALL SET NEW ADDRESSABLE CONTROL PANELS ADJACENT. IF THERE ARE SPACE CONSTRAINTS THAT WILL NOT ALLOW THIS, PROVIDE A TEMPORARY PLYWOOD WALL TO MOUNT NEW CONTROL PANEL. PROVIDE TEMPORARY ADDRESSABLE INPUT MODULES AND ASSOCIATED WIRING TO MONITOR ALL OF THE EXISTING CONVENTIONAL ZONES AND DEVICES ILLUSTRATED ON THIS DEMOLITION PLAN. PROVIDE A COORDINATED CUTOVER OF EACH ZONE FROM THE EXISTING CONTROL PANEL TO THE NEW. ONCE ALL OF THE ZONES ARE MIGRATED, DEMOLISH THE OLD CONTROL PANEL, BATTERIES, AND POWER SUPPLIES. FIBER OPTIC INFRASTRUCTURE SHALL BE RE-USED AND ROUTED INSIDE NEW CONTROL PANEL. ONCE THE AREA IS CLEARED OF EXISTING HEAD END EQUIPMENT, MOUNT NEW CONTROL PANEL IN A PERMANENT LOCATION.

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILINGS ARE GENERICALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES.
 - a. MH - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING



1 GINZBERG - 1ST FLOOR
1/8" = 1'-0"

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

**CHEROKEE MENTAL HEALTH INSTITUTE
FIRE ALARM REPLACEMENT**

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No: RFB914100-01
Date: 6/16/2020

CONSTRUCTION DOCUMENTS


Revision Date

Drawing Name:
GINZBERG - 1ST FLOOR

Drawing #:
E201

GINZBERG - 2ND FLOOR


- SYSTEMS GENERAL NOTES**
- FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
 - PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
 - ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
 - LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
 - CEILINGS ARE GENERALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
 - THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - MH - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - GINZBERG - SELECT RESTROOMS
 - WIRTH - WHOLE BUILDING
 - MOTOR POOL - WHOLE BUILDING

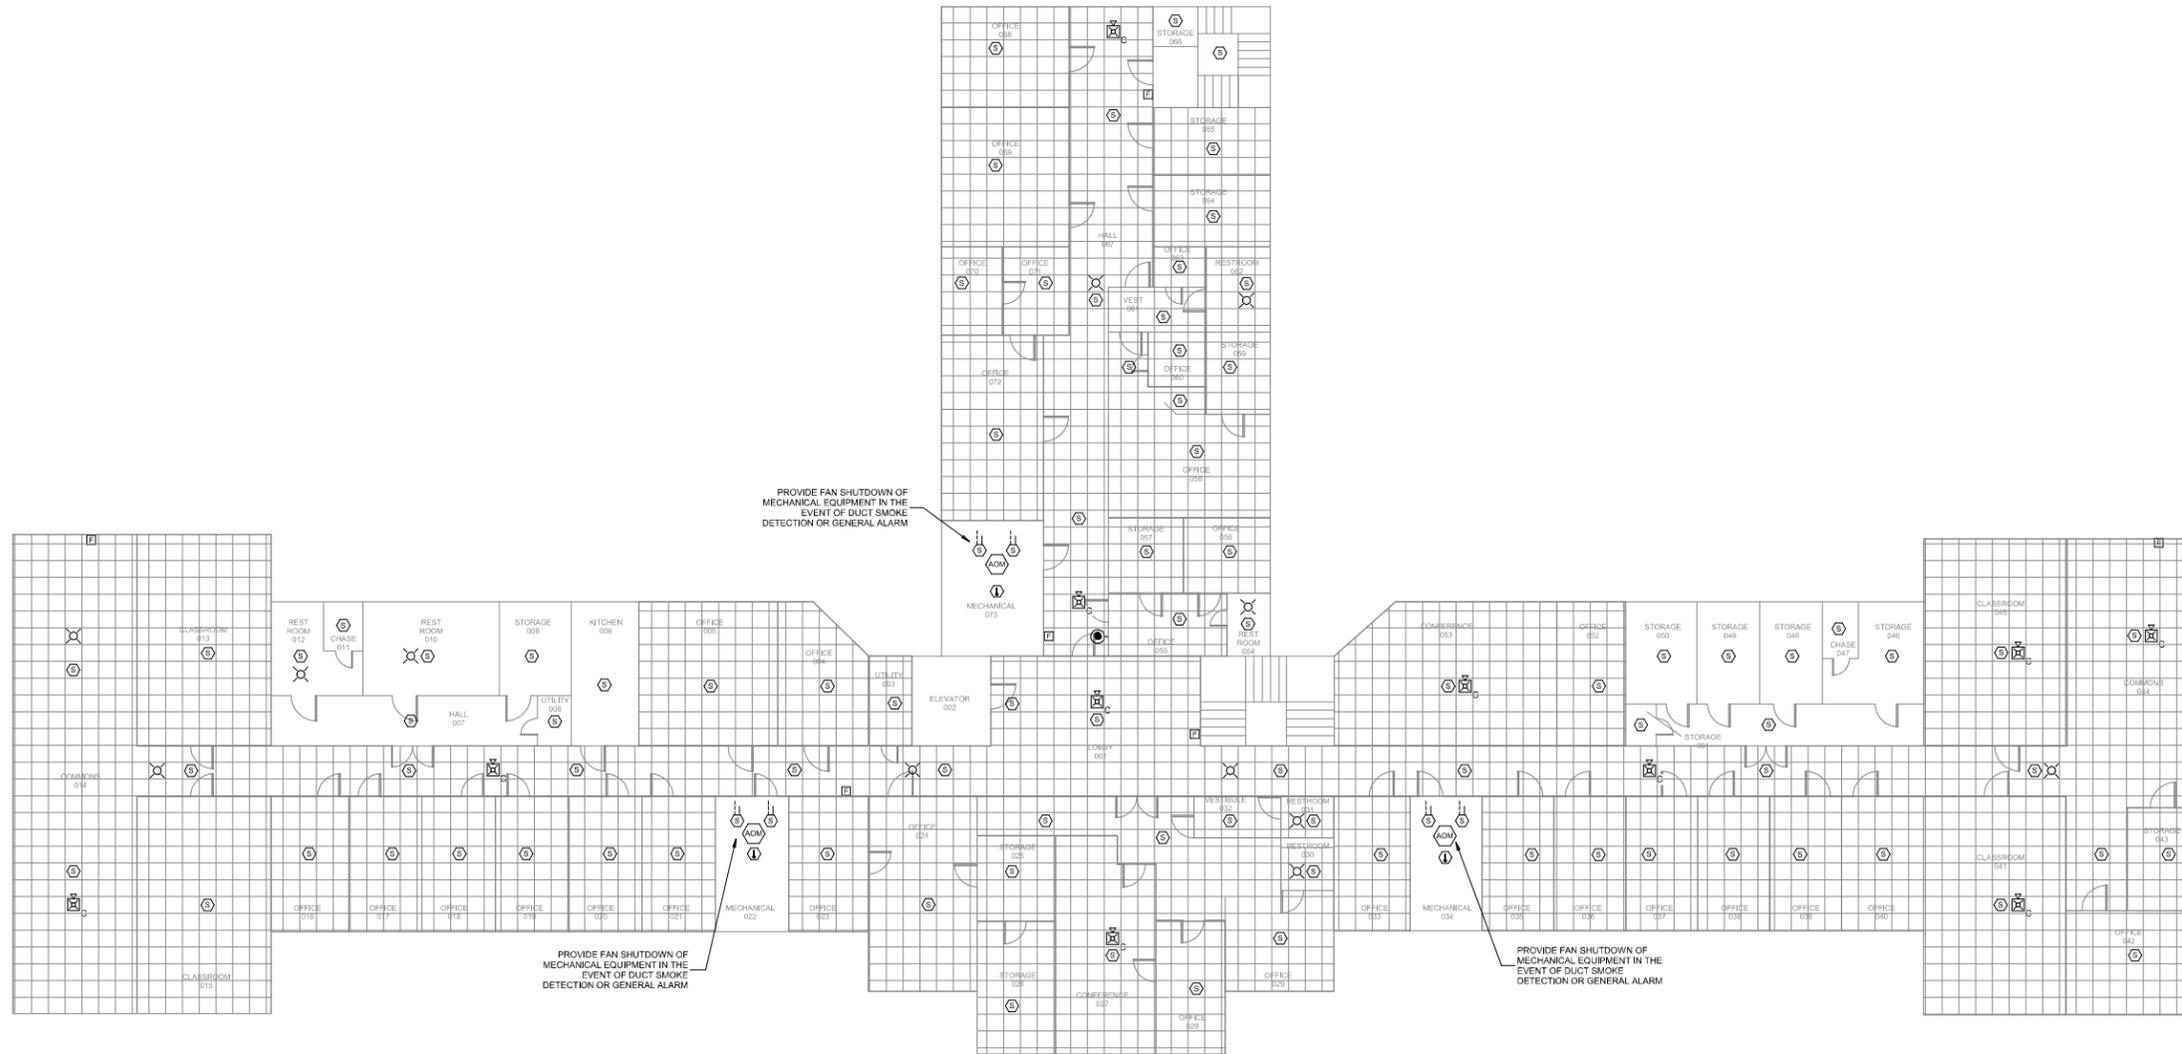

GINZBERG - 3RD FLOOR/ATTIC

SYSTEMS GENERAL NOTES

- A. FOLLOW THE CUTOVER PLAN IN ORDER TO ACHIEVE THE OWNER'S REQUIRED UPTIME OF EACH BUILDING. COORDINATE AND SCHEDULE ALL DOWNTIME WITH CHEROKEE MENTAL HEALTH INSTITUTE AND CONSTRUCTION MANAGER.
- B. PROVIDE THE REQUIRED PENETRATIONS WHILE ROUTING CABLING THROUGH THE BUILDING. COORDINATE FIRE RATED PENETRATIONS. PROVIDE CONDUIT SLEEVES AND FIRE STOPPING TO MAINTAIN THAT RATING.
- C. ANY EXISTING WALL MOUNTED DEVICES NOT BEING REPLACED WITH NEW SHALL BE PROVIDED A COVERPLATE. PAINT TO MATCH.
- D. LOCATIONS NOT ILLUSTRATING A CEILING IS ASSUMED TO BE OPEN EXPOSED CEILING. EXISTING CONDUIT SHALL BE RE-USED AND/OR MODIFIED TO ACCOMMODATE NEW DEVICES.
- E. CEILINGS ARE GENERICALLY ILLUSTRATED TO COMMUNICATE CONCEALED ACCESSIBLE CEILING LOCATIONS. IT DOES NOT NECESSARILY REPRESENT ACCURATE TILE AND GRID LOCATIONS. FIELD VERIFY CEILING CONDITIONS. THE FOLLOWING IS REQUIRED FOR ALL CEILING TYPES.
 - a. REFER TO THE BASE BID AND ALTERNATE CONTRACT SUMMARY FOR CONDUIT REQUIREMENTS IN ACCESSIBLE CEILING TILE AREAS.
 - b. PROVIDE SMOOTH CEILING SPACING FOR SMOKE DETECTION AS DEFINED BY NFPA 72. NO DEVICE SHALL EXCEED 30'-0" ON CENTER.
 - c. PROVIDE A VISIBLE NOTIFICATION DEVICE AT THE END OF CORRIDORS/COMMON SPACES AND NOT EXCEED 15'-0" FROM THE END.
 - d. DISTANCE ANY CEILING MOUNTED SMOKE DETECTOR AT LEAST 3'-0" AWAY FROM ANY CEILING SUPPLY OR RETURN AIR GRILL.
 - e. LIGHT FIXTURES, DIFFUSERS AND OTHER CEILING ELEMENTS ARE NOT SHOWN BUT WILL REQUIRE FIELD COORDINATION FOR DEVICE PLACEMENT.
- G. THE FOLLOWING LOCATIONS HAVE EXISTING CONDUIT THAT CAN BE RE-USED FOR DEVICE PURPOSES:
 - a. MHI - LINKS, BASEMENT, ATTIC, AND INDUSTRIAL SPACE
 - b. GINZBERG - SELECT RESTROOMS
 - c. WIRTH - WHOLE BUILDING
 - d. MOTOR POOL - WHOLE BUILDING

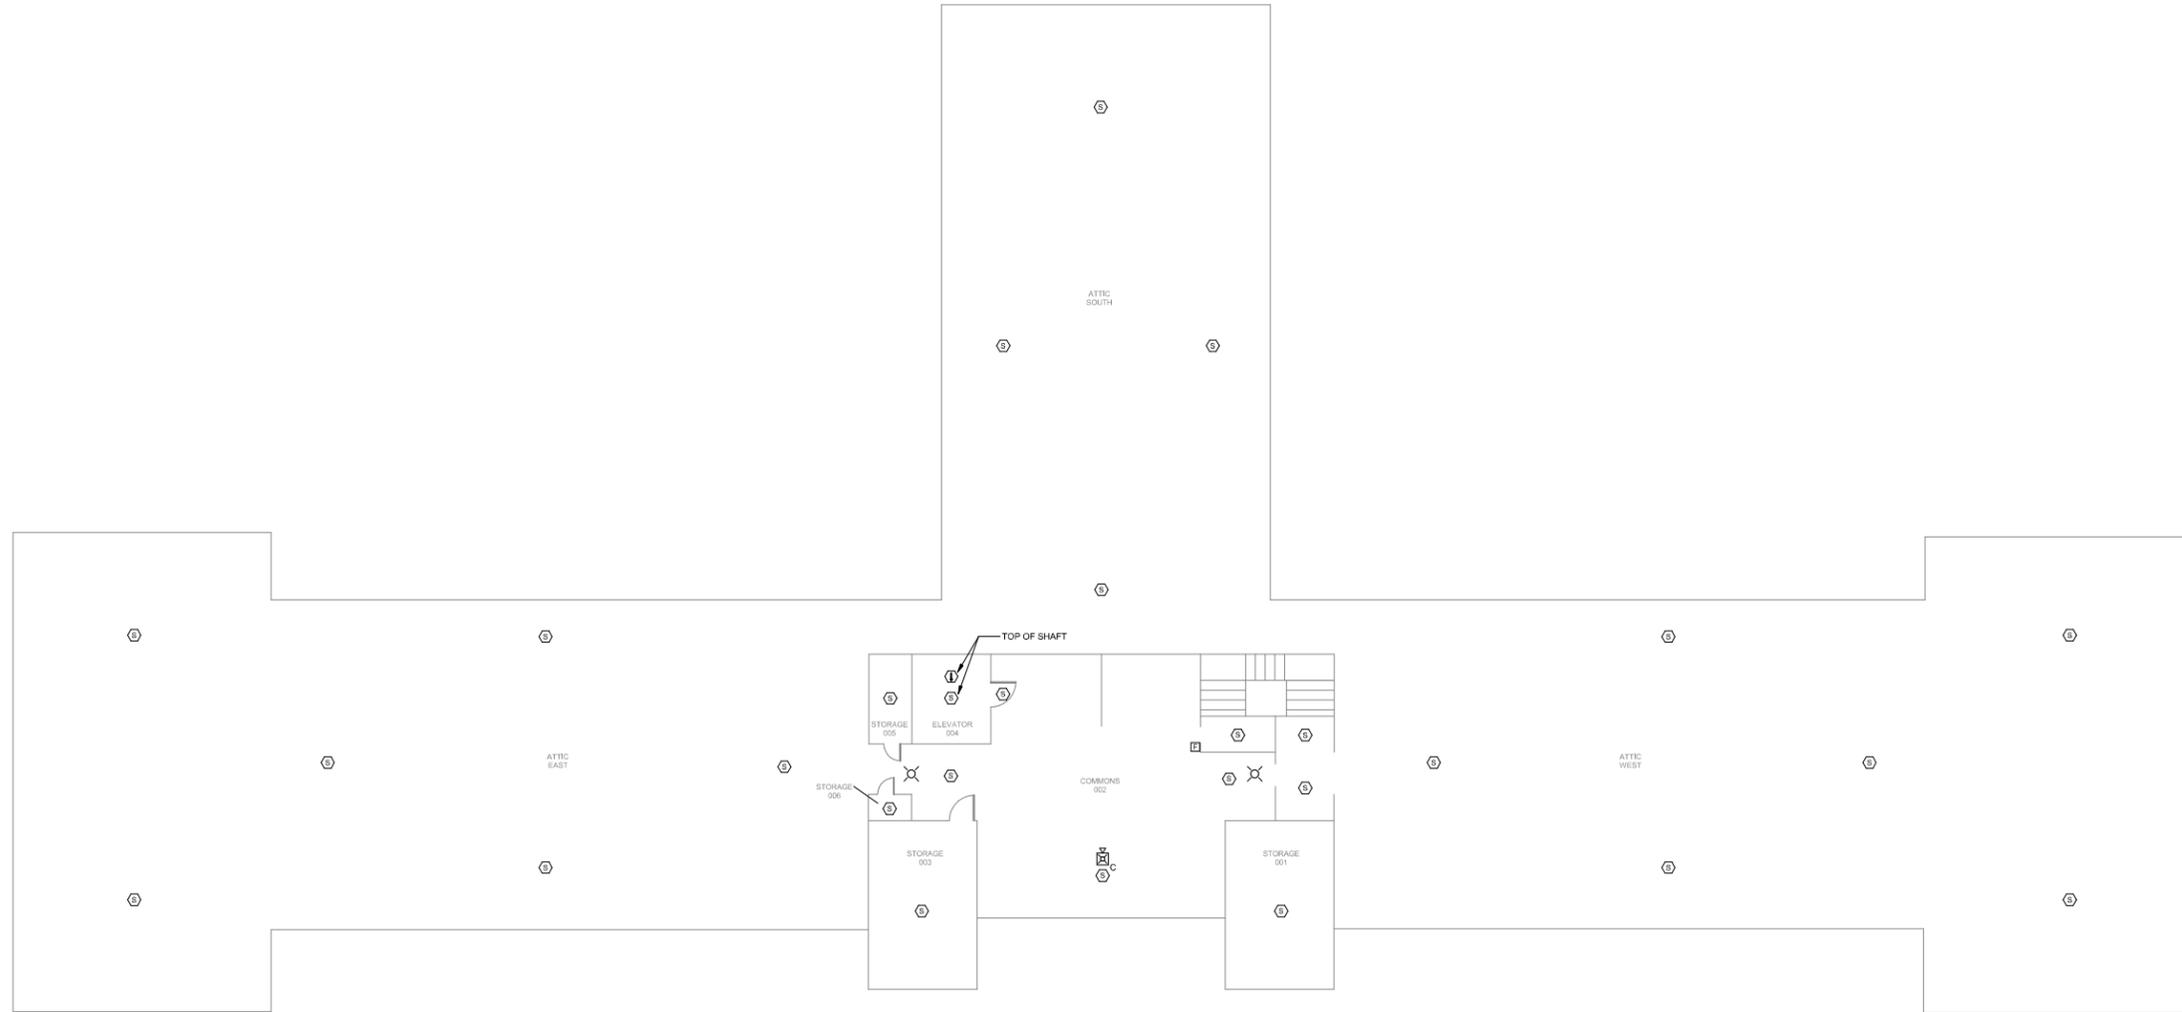

1 GINZBERG - 3RD FLOOR/ATTIC
1/8" = 1'-0"

KCL
ENGINEERING
300 4th Street,
West Des Moines,
Iowa 50265
info@kclengineering.com
Phone: 515.724.7938

CHEROKEE MENTAL HEALTH INSTITUTE FIRE ALARM REPLACEMENT

1251 W CEDAR LOOP, CHEROKEE, IA 51012

Project No:	RFB914100-01
Date:	6/16/2020
CONSTRUCTION DOCUMENTS	
Revision	Date
Drawing Name: GINZBERG - 3RD FLOOR/ATTIC	
Drawing #: E203	