




PRODUCT GUIDE

Over 300 Products To Fit Your Lifestyle

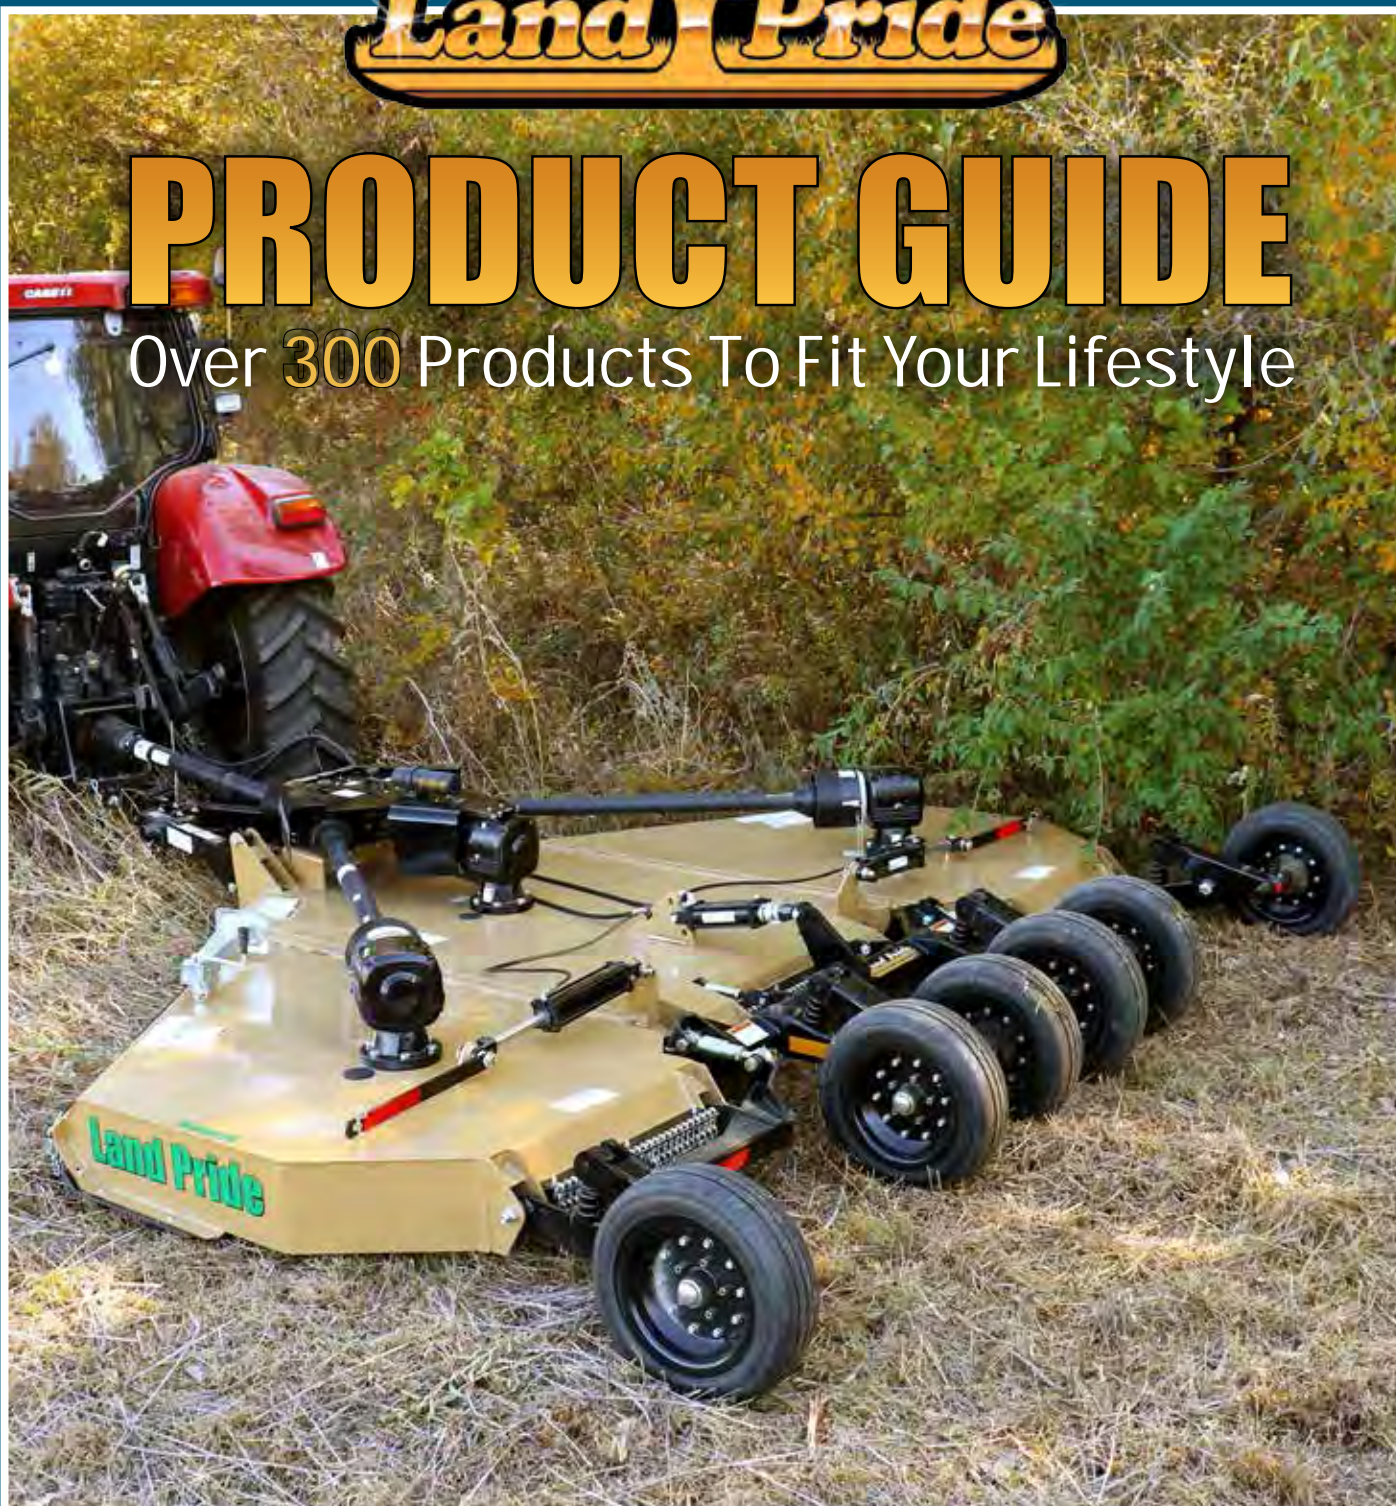

Consistently Leading the Way...

Product Guide

Products Page

MOWERS

All-Flex Mowers	6
Flail Mowers	9
Grooming Mowers	3
Zero Turn Mowers	12

CUTTERS	15
---------------	----

TILLERS	43
---------------	----

COMPACT DRILLS	49
----------------------	----

SEEDERS

All-Purpose Seeders	58
Fertilizer Spreaders	61
Food Plot Seeders	64
No-Till Seeders	57
Overseeders	59
Primary Seeders	60
Seed Bed Rollers	63

DIRTWORKING

Bale Spears	101
Box Scrapers	74
Core Aerators	81
Disc Harrows	83
Ditchers	85
Drag Harrows	63
Drag Scrapers	80
Field Cultivators	88
Grading Scrapers	79
Hydraulic Reservoir Systems	112
Landscape Rakes	71
Moldboard Plows	89
Pallet Forks	100
Pasture Aerators	90
Post Hole Diggers	91
Powered Rakes	95
Quick-Hitches	99
Rear Blades	65
Ripper Shanks	87
Scarifiers	73
Soil Pulverizers	96
Spike Tooth Harrows	97
Straw Crimper	82
Wood Chippers	98

GRAPPLES	102
----------------	-----

SNOW TOOLS	108
------------------	-----

Quality products from Land Pride.

Land Pride, A Division of Great Plains Mfg., Inc., has been a leader in grounds maintenance equipment throughout North America since 1986. Today Land Pride is a leading U.S. manufacturer of tractor mounted implements including Rotary Tillers, Grooming Mowers, Seeders, Rotary Cutters, Rear Blades, Landscape Rakes, Post Hole Diggers, and Grapples.

At Land Pride, we have earned the reputation of standing behind our products. We know how important it is for you to feel confident in purchasing products that are reliable, and to know that our support is available when assistance is needed.

Many products are available in colors to match your tractor. See the legend next to the model throughout this catalog for color availability.

Color Options:



Land Pride Quick-Hitch Systems, available in a Tractor Mount Cat. 1 Sub-Compact, Cat. 1 and Cat. 2 Tractor 3-Point Hitch, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch System icon to denote applicable products.



Models may or may not include options. Design and specifications subject to change without notice. See dealer for complete warranty information.



Designed for the homeowner.

Designed and built with homeowners in mind, the FDR16 is just right for subcompact and compact tractors. With our tapered rear discharge area, foreign objects are discharged closer to the ground, plus you can mow close to objects with either side of the mower. The floating lower clevises allow the mower to cut evenly over uneven terrain.



The driveline storage hook keeps the driveline off the ground when not in use.



Stressproof® is a Registered Trademark of Niagara Lasalle Corporation
Kevlar® is a Registered Trademark of DuPont™

	FDR1648	FDR1660	FDR1672
Horsepower	15-30 HP		
Hitch	Cat. 1		
Working Width (cm)	48" (122)	60" (152)	72" (183)
Overall Width (cm)	51" (130)	63" (160)	75" (190)
Weight - lb (kg)	486 (220)	577 (262)	619 (281)
Mowing Height	3/4" - 3-1/4"	3/4" - 5-1/4"	
Deck Material Thickness	3/16"		
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 16-7/8"	1/4" x 2-1/2" x 21"	1/4" x 2-1/2" x 25"
Blade Overlap	1-1/4"		
Blade Spindles	Greaseable		
Blade Tip Speed	16,203 FPM	18,195 FPM	18,130 FPM
Castered Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire		
Castered Wheel Spindle	1" Diameter Stressproof® Material		
Drive Train	540 RPM B-Section V-Belt		
Driveline	Heavy-duty w/Quick Coupler		
Front Roller	Optional		

*See dealer for complete warranty information.

Color Options:



60" & 72" Only

- Two position top hitch allows for various tractor lift capabilities
- Floating 3-point for ground following capabilities
- 1" Stressproof® wheel spindles with nylon bushings for smooth casting
- Single B-section belt with Kevlar®
- Grease bearings from top without removing belt covers
- Optional mulching blades available



Built for tough jobs and long days.

Discharging grass out the rear of the mower leaves a clean cut. The FDR25 distributes grass evenly over a wide surface, and it doesn't discharge into unwanted areas.



Solid rubber tires on 72" model are sandwiched between the rim halves and bolted in.



Main drive cast iron pulley offers superior strength and belt slippage control.

Some tractor and tire combinations do not allow enough room for mower hook-up. Longer lower hitch clevises are available to easily correct this situation.



(std)

Blade spindles and bearings are precision fit in a cast iron housing.



	FDR2572	FDR2584
Horsepower	15-50	
Hitch	Cat. 1	
Working Width (cm)	72" (183)	84" (213)
Overall Width (cm)	74-7/8" (190)	86-1/2" (220)
Weight - lb (kg)	718 (326)	812 (368)
Mowing Height	3/4" - 5-1/4"	
Discharge	Rear	
Lower Hitch	Floating Clevis w/Plated Pins	
Top Link	Floating Clevis	
Deck Material Thickness	3/16"	
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 25"	5/16" x 2-1/2" x 29"
Blade Overlap	1-1/4"	
Blade Spindles	Greaseable	
Deck Spindle Housings	Cast Iron Greaseable Hubs	
Blade Tip Speed	18,130 FPM	17,210 FPM
Caster Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire	4" x 11" Semi-solid
Caster Wheel Spindle	1" Diameter Stressproof® Material	
Drive Train	540 RPM B-Section V-Belt	
Driveline	Heavy-duty w/Quick Coupler	
Front Roller	Optional	

*See dealer for complete warranty information.

Color Options:



- Lower hitch clevises adjust in and out for greater leverage
- Floating 3-point for superior ground hugging capabilities
- 1" Stressproof® wheel spindles with nylon bushings for smooth casting
- Single B-section Kevlar® belt, spring-loaded for maximum performance
- Rounded front corner without lip helps protect trees and fences
- Grease bearings from top without removing belt covers

Designed for heavy commercial use.

Our FDR3690 Rear Discharge Grooming Mower is pure muscle! Its 90" width can swallow a lot of grass in one bite. The rear discharge area directs debris toward the ground and the free-swinging blades rotate at 16,500 fpm. The tapered deck allows users to get close to trees or other obstacles and the medium lift blade produce a finely groomed lawn every time.



The FDR36 frame-over-deck design is engineered for maximum airflow, featuring a roll-formed 1/4" leading edge, 6 free-swinging blades and a tapered and sloped rear deflector.

	FDR3690
Horsepower	30-60 HP
Hitch	Cat. 1
Working Width	90" (229)
Overall Width (cm)	92" (234)
Weight - lb (kg)	930 (422) (w/o Front Roller)
Mowing Height	1" - 6-1/2" in 1/4" Increments w/Plated Spacers
Discharge	Rear
Lower Hitch	Floating Clevis w/Plated Pins
Top Link	Floating Clevis
Deck Material Thickness	3/16"
Blades 6 ea.	Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per blade spindle)
Blade Overlap	2"
Blade Tip Speed	16,500 FPM
Blade Spindles	1-3/8" Stressproof® Shaft
Deck Spindle Housings	Cast Iron Greasable Hubs
Drive Train	540 rpm Double V Powerband Belt
Belt Take-up	Spring Loader Idler
Gearbox	540 rpm, Cast Iron Housing with Beveled Gears
Caster Gauge Wheels	5" x 13" Semi-Solid Tire with Bearings
Caster Wheel Spindle	1-1/4" Diameter with Greasable Bushing
Driveline	Heavy-Duty Cat. 4 w/Quick Coupler
Front Roller	Optional


*See dealer for complete warranty information.

Color Options:



- Floating 3-point
- Clevis hitches for easy one person hook-up
- 3/16" Deck material
- 6 Free swinging blades
- 13" Semi-solid tires with bearings
- Spring loaded idler
- Cast iron pulleys
- Grease bearings from top without removing belt covers



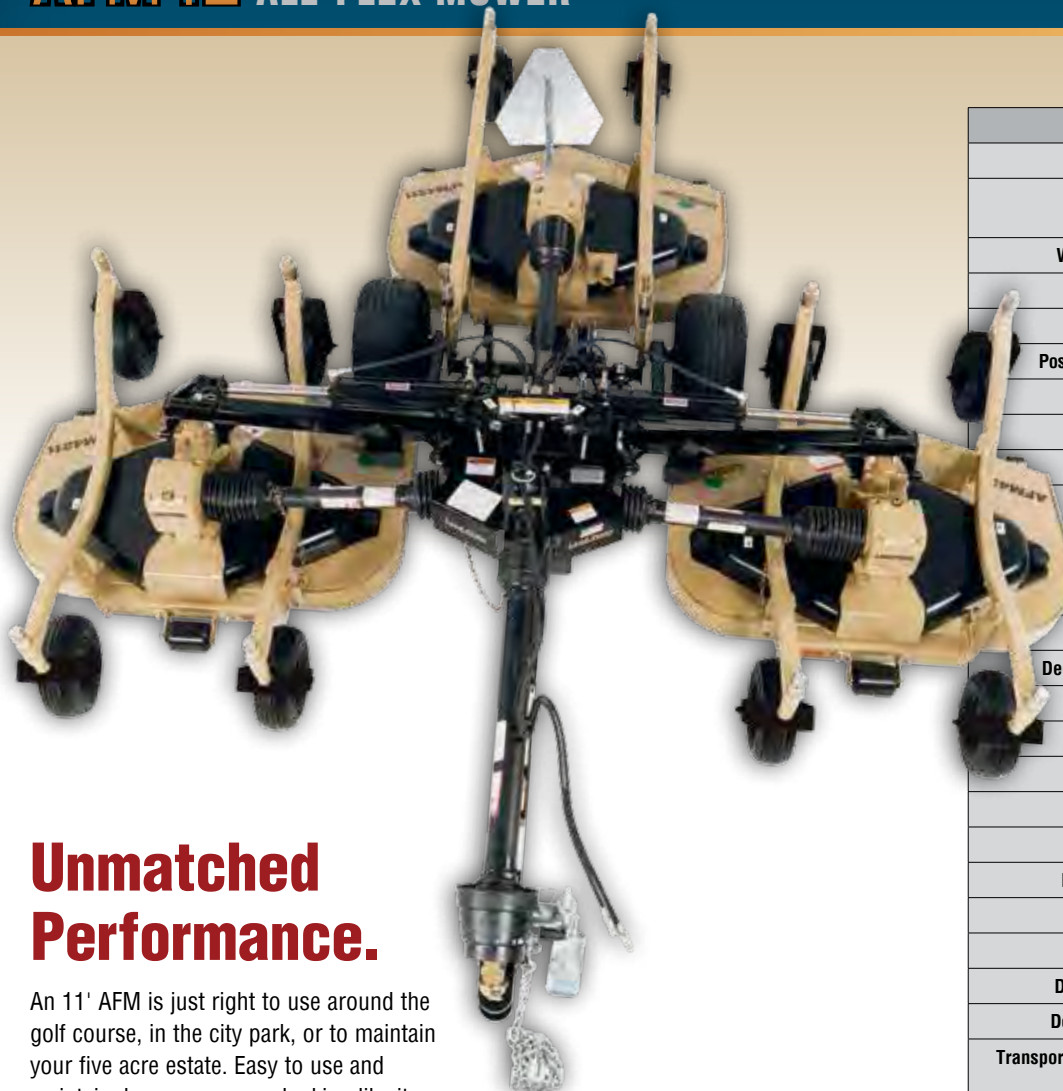

Unmatched Performance.

An 11' AFM is just right to use around the golf course, in the city park, or to maintain your five acre estate. Easy to use and maintain, keep your grass looking like it was cut with a walk-behind, but with a lot less time invested!

- Automatic wing locks for transport
- Zero turning radius due to sleek frame design
- Rear discharge for even dispersal
- Easy to grease from top blade spindles



Dispensing cut grass is a key ingredient to maintaining healthy turf. The more evenly and completely the cut grass is dispersed, the quicker it works its way towards the soil for decomposition.

	AFM4211
Horsepower	30-65 HP
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain
Working Width (cm)	11'1" (338)
Overall Width	11'3-1/2"
Transport Width	7'8"
Positive Tongue Wt - lb	450
Weight - lb (kg)	2040 (918)
Cutting Height	1" - 5-1/2" in 1/4" incr.
Wing Cylinders	2-1/2" x 12"
Rear Deck Cylinder Gearbox	2" x 8" 540 RPM, 1 Splitter, 3 Wing
Decks: 3 each	48"
Deck Thickness	3/16"
Deck Overlap	6"
Deck Spindle Housing	Cast Iron Greaseable Hubs
Blade Size	1/4" x 2-1/2" x 16-7/8"
Blade Overlap	1-3/16"
Blade Tip Speed	16,020 fpm (182 mph)
Blade Bearings	Greaseable Ball Bearings
Blade Spindles	1-3/8" Stressproof® Shaft
Blade Spindle RPM	3,628 RPM
Drive Train	540 RPM B-section V Belt
Discharge	Rear
Deck Tires - 10 total	13 x 5 Air Tire, Sealant
Deck Wheel Spindles	1-1/4" w/Nylon Bushings
Transport Tires and Bearing	18 x 9.5, Sealant and Tapered Bearings
Anti-Scalp Roller	Front Center and Outside Deck Corners
Input Driveline	Cat. 3 CV w/Slip-Clutch
Deck Driveline	Cat. 3
Mowing capacity @2mph	2.68 Acres/hr
@4mph	5.37 Acres/hr
@6mph	8.1 Acres/hr
Flex-Wings	23° L-R, 22° F-B
Flex Center	13° F-B

*See dealer for complete warranty information.

Color Options:



Get the results you deserve!

The AFM is perfect for golf course maintenance, large estates, city recreation areas and sports fields. Sleek enough to get under trees and agile enough to turn on a dime, the AFM Series is just right for all around maintenance. And the quality of cut is the best feature of all.



- Wings automatically lock for safe transport, release with pull rope or optional hydraulics
- Single B-section belt per deck with spring-loaded belt tensioner
- Rear discharge without chains. Chains collect moist grass and drop it in unsightly clumps
- Wing decks discharge clippings away from the rear deck
- Wing deck rear wheels are non-castering; helps hold mower on slopes
- Single beam hitch and generous deck overlap virtually eliminate skipping in "zero-turn" situations



Anti-scalp rollers on nose and trailing edges of decks protect the deck as well as the turf.



Low deck pivot allows for greater side to side flotation on the wing decks.



Over center release easily takes tension off the drive belts during extended off time, or for belt replacement.



Optional Hydraulic Wing Unlock allows user to unlock the wings from the tractor seat.

	AFM4214	AFM4216
Horsepower	40-70 HP	
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain	
Working Width (cm)	14' (427)	16' 8" (508)
Overall Width	14' 3"	16' 10"
Transport Width	6' 8"	8' 10"
Positive Tongue Wt - lb	540	580
Weight - lb (kg) (w/15" tires)	3000 (1361)	3315 (1504)
Cutting Height	3/4" - 5-1/4" in 1/4" incr.	
Wing Cylinders	2-1/2" x 12"	
Rear Deck Cylinder	2-1/2" x 8"	
Gearbox	540 RPM, 3 Wing, 1 Splitter	
Decks: 3 each	60"	72"
Deck Thickness	3/16"	
Deck Overlap	6"	8"
Deck Spindle Housing	Cast Iron Greaseable Hubs	
Blade Size	5/16" x 2-1/2" x 20-29/32"	5/16" x 2-1/2" x 25"
Blade Overlap	1-1/4"	
Blade Tip Speed	18,396 fpm	18,340 fpm
Blade Bearings	Greaseable Ball Bearings	
Blade Spindles	1-3/8" Stressproof® Shaft	
Blade Spindle RPM	3,362 RPM	2,802 RPM
Drive Train	540 RPM B-section V Belt	
Discharge	Rear	
Deck Tires - 10 total	15 x 6.6 Air Tire, Sealant or 18 x 9.5 Air Tire, Sealant	
Deck Wheel Spindles	1-1/4" w/Nylon Bushings	
Transport Tires and Bearing	23 x 10.5, Sealant Tapered Bearings	
Anti-Scalp Roller	Front Center and Outside Deck Corners	
Input Driveline	Cat. 4 CV w/Slip-Clutch	
Deck Driveline	Cat. 3	
Mowing capacity @2mph	3.39 Acres/hr	4.0 Acres/hr
@4mph	6.78 Acres/hr	8.1 Acres/hr
@6mph	10.17 Acres/hr	12.1 Acres/hr
Flex-Wings	23° L-R, 22° F-B	
Flex Center	10° L-R, 22° F-B	

*See dealer for complete warranty information.

Color Options:

5 YEAR
Limited Gearbox
Warranty



Wide open spaces...

Our 22' All-Flex Mower is ideal for those wide open spaces. Cutting a 22' swath takes a bite out of any workload, while leaving behind a professionally performed finish.



The commercial duty 1-5/8" blade spindle features a cast iron housing, additional steel plate support, a 3/4" thick blade support bar and a remote greasing line.



Transport width of 9'6" allows for safe transport from site to site.

	AFM4522
Horsepower	65-100 HP
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain
Working Width (cm)	21' 9" (663)
Overall Width	22'
Transport Width	9' 6"
Positive Tongue Wt - lb	740
Weight - lb (kg)	4150 (1886)
Cutting Height	3/4" - 5-1/4" in 1/4" incr.
Wing Cylinders	3-1/2" x 12"
Rear Deck Cylinder	2-1/2" x 8"
Gearbox	540 RPM, 3 Wing, 1 Splitter
Decks: 3 each	90"
Deck Thickness	3/16"
Deck Overlap	4-1/2"
Blade Hub	5 Bolt Casting
Blade Size	5/16" x 2-1/2" x 31-17/32"
Blade Overlap	2-1/4"
Blade Tip Speed	18,498 fpm
Blade Bearings	Greaseable Ball Bearings
Blade Spindles	1-5/8" Stressproof® Shaft
Blade Spindle RPM	2,241 RPM
Blade Drive Belt	1 C-section
Discharge	Rear
Deck Tires - 10 total	18 x 9.5 Air Tire, Sealant
Deck Wheel Spindles	1-1/4" w/Nylon Bushings
Transport Tires and Bearing	P27560SR Tapered Bearings
Anti-Scalp Roller	Front Center of Each Deck
Input Driveline	Cat. 4 CV w/Slip-Clutch
Deck Driveline	Cat. 3
Mowing capacity @2mph	5.27 Acres/hr
@4mph	10.54 Acres/hr
@6mph	15.82 Acres/hr
Flex-Wings	23° L-R, 22° F-B
Flex Center	10° L-R, 22° F-B

*See dealer for complete warranty information.



- Anti-scalp rollers on each deck reduces turf damage
- 18" Deck tires with sealant mean fewer pounds per square inch
- Single C-section belt per deck with spring-loaded belt tensioner
- Single beam tongue for zero turning radius
- Rear discharge decks for even dispersal
- Adjustable clevis hitch to fit various draw bar heights

Fast, clean and dependable mowing.

Land Pride Flail Mowers are the perfect choice for schools and other recreational areas where people may be present. With the rotor working in the opposite direction of travel, the cut grass is brought up and over the rotor. Most clippings are laid down prior to the mower passing by, which means foreign objects also have a tendency to stay inside the mower and are less likely to be discharged.

The 21 Series Flail Mower offers a two position hitch for offsetting the mower, enabling closer cutting along buildings, fences, or roadsides.



Tapered ends on rear roller prevent gouging during tight turns.

	FM2160	FM2172
Horsepower	25-55 HP	
Hitch	Cat. 1	
Working Width (cm)	60" (152)	72" (183)
Weight - lb (kg)	695 (315)	772 (350)
Cutting Height	3/4" - 4"	
Cutting Capacity	1"	
Offset Hitch	6-1/4" Right, Centered	
Deck Thickness	11 Gauge	
Knives	Duck-foot Type	
Rotor Diameter	5"	
Rotor Rotation	Reverse	
Belt Type	3 'B' Section	
Gearbox RPM	540 w/Over-Running Clutch	
Driveline	Cat. 4	

Color: 

- Rear height adjusting roller with greaseable bearings
- Scraper on rear height adjusting roller
- 2 Position hitch for offsetting, enabling closer cutting along buildings, fences, or roadsides
- Adjustable skid shoes
- Duckfoot style blade for grooming
- Rear door access for ease of changing blades



Free-swinging duckfoot style blade is capable of providing a groomed appearance as well as cutting material up to 1" thick.



Perfect for schools and recreational areas.

The perfect model for mowing around schools and municipalities, the 31 Series has a mostly enclosed structure to keep the cut grass and other debris within the cutting chamber.


	FM3188
Horsepower	35-80 HP
Hitch	Cat. 1 & 2
Working Width (cm)	88" (224)
Weight - lb (kg)	1,300 (590)
Cutting Height	1/2" - 6"
Cutting Capacity	1"
Offset Hitch	7-3/4" Left & Right, Screw Type
Deck Thickness	3/16"
Knives	Fine Cut
No. of Knives	48
Rotor Diameter	5-1/2"
Rotor Rotation	Reverse
Belt Type	3 'B' Section
Gearbox RPM	540 w/Over-Running Clutch
Driveline	Cat. 4

Color: 

- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns
- Scraper on rear height adjusting roller
- Fenders on both ends to protect trees
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop
- Easy to adjust screw-type offset hitch

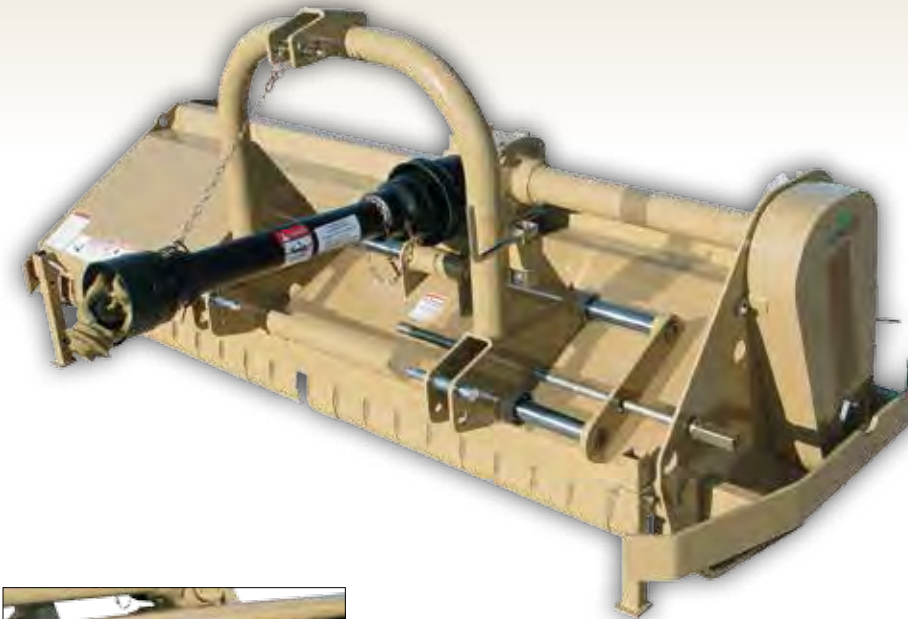

The two blade system results in a fine cut.

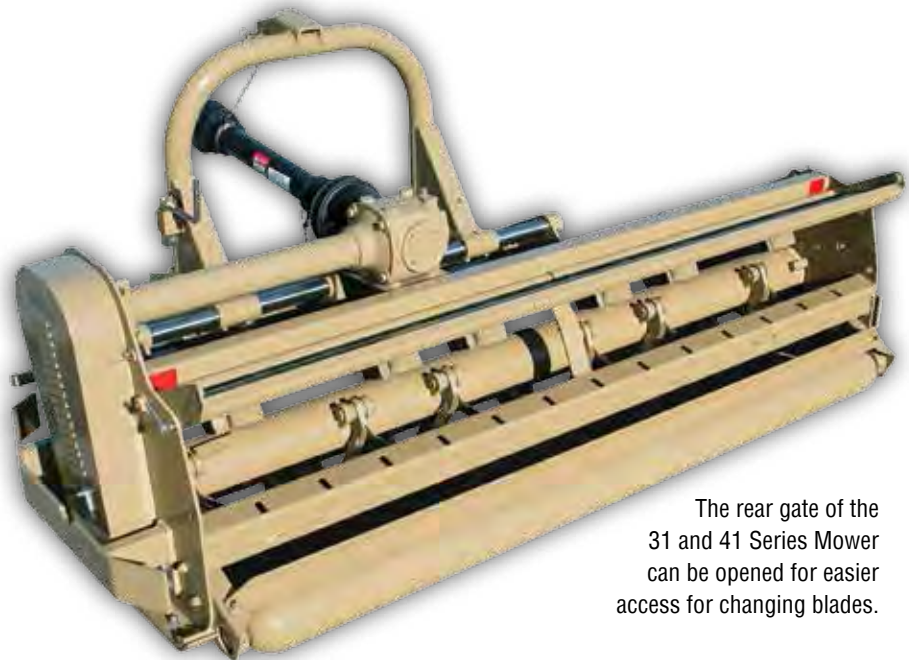

The rear gate of the 31 and 41 Series Mower can be opened for easier access for changing blades.

Tough machine offering fine results.

The 41 Series offers 3/16" deck material and utilizes a threaded rod to easily offset the hitch by nearly 8". The gearbox incorporates an over-running clutch that enables the rotor to swing free to a stop when the tractor PTO has been turned off. The 41 Series also offers cast and machined hammers and brush rake teeth.



	FM4188
Horsepower	35-80 HP
Hitch	Cat. 1 & 2
Working Width (cm)	88" (224)
Weight - lb (kg)	1,323 (600)
Cutting Height	1/2" - 6"
Cutting Capacity	2"
Offset Hitch	7-3/4" Left & Right, Screw Type
Deck Thickness	3/16"
Knives	Hammers
No. of Knives	24
Brush Rake Teeth	13 Each
Rotor Diameter	5-1/2"
Rotor Rotation	Reverse
Belt Type	3 'B' Section
Gearbox RPM	540 w/Over-Running Clutch
Driveline	Cat. 4

Color:

- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns
- Scraper on rear height adjusting roller
- Hinged rear gate allows opening for easy access to hammers
- Fenders on both ends to protect trees
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop
- 13 Adjustable brush rake teeth keep prunings in the blade path for maximum mulching



The baffles on the top inside of the deck keep the cut material from clumping together.



The 41 Series features 24 cast and machined hammers to shred prunings and to provide a nice clean cut in grass.



Perfect Cut...

The ZST is just the right size with features that treat a homeowner to durability, efficiency, and a great manicured lawn!



The ZST Series residential class mowers are compact in size and ideal for homeowner grass maintenance.



Adjustable seat and steering levers allow for various positions to meet varying size requirements.

	ZST40	ZST48
Cutting Width	40"	48"
Cutting Height	1" to 4-1/2" in 1/2" Increments	
Engine	15 HP Kawasaki	18 HP Kawasaki
Deck Thickness	11 Gauge w/11 ga. Doubler Plate	
Steering	Twin Lever	
Anti-Scalp Rollers	1	2
Blades	Heat Treated, Medium Lift, Fusion® edge, 2 on 40", 3 on 48"	
Blade Spindles	Single V-Belt	
Tires	1-3/8" Cast Iron Housing, Greaseable Ball Bearings Optional Mulching Blades	
Fuel Capacity	3 U.S. Gallons	
Pump Drive	Belt Drive	
Parking Brake	Manually Activated	
Ground Speed	Forward 0-6 mph; Reverse 0-4 mph	
Bagging Options	Available	
Rear Bumper	Extended Height Bumper - Optional	

*See dealer for complete warranty information.



Shown with extended height bumper.

- Square tubing welded frame design provides increased durability.
- Easy clean-out deck top allows air and debris to move across for improved belt cooling.
- Anti-scalp rollers keep scalping to a minimum.
- Floating deck design provides excellent flotation over uneven terrain.
- Accessible blade spindle zerks make greasing easy.
- Lever activated park brake.

A Close Cut Everytime.



The ZSR Super Razor is designed for those small acreage homeowners or smaller contractors who want just a little more! The ZSR offers a wider deck choice, larger rear tires, a floating front axle and "commercial" quality gears.

	ZSR54	ZSR60
Cutting Width	54"	60"
Cutting Height	1-1/2" - 4-1/2" in 1/4" Increments	
Engine	23 HP & 23.5 HP Kawasaki	
Deck Thickness	10 Gauge Decks w/11 ga. Doubler Plate & 3/16" Reinforcement Plate Connecting Spindle Housing Mounts	
Steering	Twin Lever	
Anti-Scalp Rollers	4	
Blades	Heat Treated, High Lift, Fusion Technology	
Pivoting Front Axle	Locked or Unlocked	
Blade Belt	Single V-Belt	
Blade Spindles	1-3/8" Spindle, Cast Iron Housing, Greaseable Ball Bearings	
Tires	Front: 13 x 5 - 6, Rib Tread; Rear: 20 x 10 - 10, Turf Tread	
Fuel Capacity	12 U.S. Gallons	
Cooling	Air Cooled	
Pump Drive	V-Belt from Engine Crankshaft	
Parking Brake	Manually Activated, Pawl Over Cog Wheel	
Ground Speed	Forward 0-7.2 mph; Reverse 0-4.5 mph	
Seat	Deluxe Cushion Seat w/Springs, Armrests	
Certified ROPS	Standard	

*See dealer for complete warranty information.

Color: 



Front edge of deck is reinforced with a heavy underside box section.



Productivity Defined.

The AccuZ® ZT3 Series Zero Turn Mower is Land Pride's premier commercial-duty mower. The ZT3 is an excellent turf-care choice for ranchers, large estate owners, municipalities, campuses, and other landscape contractors. With a host of standard features, productivity comes naturally. The ZT3 60" deck meets the needs of customers who need to mow in tight areas, around obstacles, or want to maintain a lower cutting height over undulating terrain. The more productive 72"

ZT3 will meet the needs of customers with mostly level, open areas who want to get their mowing job done faster.



- Lockable floating front axle
- Standard remote commercial air filter
- Superior deck design with reinforced front edge
- Deluxe seat with springs
- Certified ROPS for added operator protection



Rear bumper tow hook

	ZT360	ZT372
Working Width (cm)	60" (152)	72" (183)
Cutting Height	1"-5" in 1/4" Increments	
Engine	Air Cooled, Commercial Filter 27 HP Kawasaki	
Deck Thickness	3/16" Decks & 1/4" reinforcement plate connecting spindle housing mounts	
Steering	Twin Lever	
Anti-Scalp Rollers	4	
Blades	Heat Treated, High Lift with Fusion® Edge Technology	
Front Fork Suspension	Tele-Caster®	
Pivoting Front Axle	Locked or Unlocked	
Blade Belt	Single V-Belt	
Blade Spindles	1-3/8" Stressproof® Shaft, Cast Iron Housing, Greaseable Ball Bearings	
Tires	Front: 13 x 6.50 - 6, Rib Tread; Rear: 24 x 12.00 - 12, Turf Tread	
Fuel Capacity	12 U.S. Gallons	
Drive System	Integrated Transmission	
Parking Brake	Internal Wet Disk, Manually Activated	
Ground Speed	Forward 0-12 mph; Reverse 0-6 mph	
Seat	Deluxe seat w/suspension springs, seat belt	
Optional Seat	Molded vinyl with comfort suspension adjustment	
Certified ROPS	Standard	

*See dealer for complete warranty information.




Tele-Caster® Front Fork Suspension

We know that a smooth looking lawn doesn't necessarily mean a smooth feeling lawn. We've taken comfort one step further with our patented Tele-Caster® Front Fork Suspension. This standard feature allows the wheel forks to absorb the rough terrain, allowing the deck to continue to cut even, and gives you a more comfortable ride. This translates into less fatigue, and puts you in a better frame of mind when the job is done! (Patent No. 8,167,324)



**Ideal for clearing grass,
weeds & light brush.**

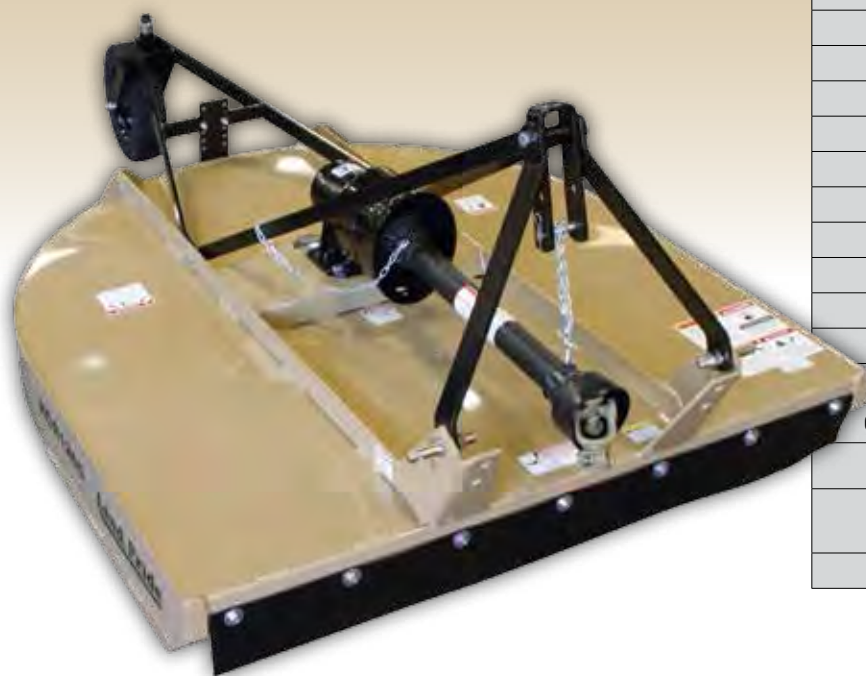

	RCR1248	RCR1260	RCR1272
Horsepower	20-60 HP		
Hitch	Cat. 1 & Cat. 1 Limited		
Working Width (cm)	48" (122)	60" (152)	72" (183)
Overall Width	53-5/8"	64-1/4"	76-1/2"
Overall Length	89-1/8"	103-3/8"	114-1/2"
Weight - lb (kg)	400 (181)	478 (217)	564 (256)
Cutting Height	1-1/4" - 10"		
Cutting Capacity	1" Diameter		
Deck Thickness	12 Gauge		10 Gauge
Deck Height	7-1/4"		
Safety Guards	Front and Rear Rubber Guards		
Skids	1/4" x 2" Weld on		
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades		
Blade Tip Speed	13,256 fpm	16,536 fpm	15,033 fpm
Dishpan	Round 10 Ga. x 24" Diameter, Dish Shaped		
Gearbox Rating^	60 HP		
Gearbox	540 RPM, PTO Driven Gearbox, Cast Iron Housing		
Driveline	ASAE Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate, Slip Clutch		
Tailwheel	15" Laminated Tire w/Cast Iron Hub		

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck to side skirt
- Dishpan with dual blades
- 360° Degree swivelling tailwheel
- Optional bolt on skid shoes for 60" & 72"



In the City or the Country

Economically priced rotary cutter for daily use in small lots and country sides, capable of cutting 1" diameter material.



Efficient handling and dispersing of material.



2"
CUTTING
CAPACITY

2"



	RCR1542	RCR1548
Horsepower	20-60 HP	
Hitch	Cat. 1 & Cat. 1 Limited	
Working Width (cm)	42" (107)	45-1/2" (116)
Overall Width	47-1/2"	53-1/2"
Overall Length	85-1/4"	91-3/4"
Weight - lb (kg)	402 (182)	424 (192)
Cutting Height	1-3/4" - 11-1/2"	
Cutting Capacity	2" Diameter	
Deck Thickness	12 Gauge	
Deck Height	7-1/4"	
Safety Guards	Rubber Front and Rear	
Skids	1/4" x 2" Weld on	
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	11,459 fpm	13,090 fpm
Dishpan	Round 10 Ga. x 24" Dia., Dish Shaped	
Gearbox Rating^	65 HP	
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing	
Driveline	ASAE Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch	
Tailwheel	4" x 16" Molded Rubber Tire	

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



- Floating 3-point allows deck to hug the terrain
- 2 Position top link for greater lifting leverage on small tractors
- Shearpin or slip-clutch driveline
- High blade tip speed
- Driveline storage hook
- Fully welded deck adds additional strength

Ideal for cleaning around the farm, the pond, or empty lots in the city.



RCR18 & RCF20 feature a 10 Gauge dishpan with 1" thick blade bar that slides over stumps, rocks and debris.



	RCR1860	RCR1872	RCR1884
Horsepower	20-65 HP		45-90 HP
Hitch	Cat. 1		
Working Width (cm)	57" (145)	69" (173)	84" (213)
Overall Width	65"	77"	89"
Overall Length	99-3/8"	110"	135"
Weight - lb (kg)	599 (272)	737 (334)	851 (386)
Cutting Height	1-1/2" - 13"	1-1/2" - 11-1/2"	2" - 11"
Cutting Capacity	2" Diameter		
Deck Thickness	10 Gauge		
Deck Height	7-1/2"	9"	9-1/8"
Safety Guards	Rubber or Chain, Rear Metal Band - Standard		
Skids	1/4" x 2" Weld on		
Blades	Heat Treated Alloy Steel Free Swinging Blades		
	1/2" x 3"		1/2" x 4"
Blade Tip Speed	16,363 fpm	14,853 fpm	17,113 fpm
Dishpan	Round 10 Ga. x 24" Dia., Dish Shaped		Oval 10 Ga., Dish Shaped
Gearbox Rating^	65 HP		130 HP
Gearbox	540 RPM, PTO Driven Gearbox		
Driveline	Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch		
	ASAE Cat. 3		ASAE Cat. 4
Tailwheel	4" x 16" Solid Rubber Tire, Cast Iron Hub		4" x 8" x 15" Laminated Tire or Dual Laminated Optional, Cast Iron Hub

*See dealer for complete warranty information.

^Based on field performance.

60 & 72

Color Options:

84

Color Options:



- Floating 3-point allows deck to hug the terrain
- Fully welded deck adds additional strength
- High blade tip speed ensures clean cut
- Single or dual tailwheel on 84"
- Heavy-duty tailwheel spindle
- All-welded formed channels front to rear add superior strength
- Lower clevises for easy hookup



The Perfect Cutter for Rural Grass Maintenance - in a Smooth Top Design.

- Smooth top for easier cleaning
- Cast floating top link for following ground undulations
- ASAE Category 3 driveline
- Fully welded deck
- Available rubber or chain guards - front and rear
- High blade tip speed
- 84" Features single or dual tailwheel option

2"
CUTTING
CAPACITY

← 2" →

	RCF2060	RCF2072	RCF2084
Horsepower	20-65 HP		45-90 HP
Hitch	Cat. 1 - Floating Top Link		Cat. 1 & 2 Floating Top Link
	Clevis Type Lower Links, Quick Hitch Adaptable		
Working Width (cm)	60 (152)	72 (183)	84 (213)
Weight - lb (kg)	620 (281)	745 (338)	Sgl tailwheel: 1,047 (475) Dual tailwheel: 1,155 (524)
Cutting Height	1-1/2" - 12"		
Cutting Capacity	2"		
Deck	All Welded		
Deck Thickness	10 Gauge		
Deck Height	9-11/16"	11"	11-15/16"
Safety Guards	Rear Metal Banding - Standard		
Optional Guarding	Front: Rubber or Chain Rear: Rubber or Chain		
Skids	Weld-on (Bolt on Accessory Skid Shoes Available)		
Blades	2 ea. (1/2" x 3" Heat Treated) Free Swinging High-Lift		2 ea. (1/2" x 4" Heat Treated) Free Swinging High-Lift
Blade Bolt	Keyed w/Hardened Flat Washer & Lock Nut		
Blade Speed	16,363 fpm	14,955 fpm	17,113 fpm
Dishpan	Round, 10 Ga. x 24" Dia., Dish Shaped		Oval, 3/16" x 27"
Gearbox Rating[^]	65 HP		130 HP
Gearbox	540 RPM, Beveled Gears, Cast Iron Housing		
Driveline	ASAE Cat. 3; Shear Bolt or 2-Plate Slip-Clutch		ASAE Cat. 4; 2-Plate Slip-Clutch
Tailwheels	4" x 15" Laminated Tire or 4" x 16" Molded Rubber - 360 Degree Swivel		Single or Dual 4" x 15" Laminated Tire w/ Cast Iron Hub - 360 Degree Swivel

*See dealer for complete warranty information.

[^]Based on field performance.

60 & 72

Color Options:



84

Color Options:



Roundback design allows for more efficient handling and dispersing of material.

Land Pride's 26 Series Rotary Cutters are the perfect fit for around the farm clean-up or keeping the horse pasture under control. The 3" cutting capacity also allows it to be the choice of many municipalities from parks to easement control applications.

The floating top link allows the cutter to follow uneven terrain. The beefy lower hitch clevises allow easy hook-up to the tractor, as well as adding another degree of strength to the overall hitch area.

Take a close look at our welding, and the precise fit-up of all the fabricated parts and you'll understand the perfection we expect out of our manufacturing facilities. Our cast iron gearbox has internal components crafted to a precision fit; teeth and gears that mesh together perfectly for a quiet and efficient power source.



	RCR2660	RCR2672	RCR2684
Horsepower	35-130 HP		60-130 HP
Hitch	Cat. 1 & 2		Cat. 2 & 3
Working Width (cm)	60" (154)	72" (183)	84" (213)
Overall Width	67"	79"	90-3/4"
Overall Length	114"	126"	Single 133", Dual 116"
Weight - lb (kg)	1002 (454)	1046 (474)	1370 (621) Single ga. whl 1500 (680) Dual ga. whl
Deck Thickness	10 Gauge		
Cutting Height	2"-12"		
Cutting Capacity	3" Diameter		
Safety Guards	Front: Chain; Rear: Single or Double Chain		
Skids	Full Length Weld & Replaceable Shoes		
Deck Height	9-1/8"		10-1/8"
Blades	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades		
Blade Tip Speed	12,384 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
Gearbox Rating[^]	130 HP		
Gearbox	540 RPM PTO Driven, 1-3/8" 6 Spline Cast Iron Housing		
Driveline	ASAE Cat. 4 4-Plate Slip Clutch		
Tailwheel	4" x 8" x 15" Laminated Tire Cast Iron Hub		

*See dealer for complete warranty information.

[^] Based on field performance.

Color Options: 

- Replaceable skid shoes
- Clevis hitch for easy hook-up
- Full length skids with replaceable shoes
- Rugged laminated tailwheel
- Fully welded deck
- 3-Point with dual 15" tailwheels on 84"



RCR26 & RCF27 Rotary Cutters feature a 3/16" dishpan with 1" x 4" blade bar that provides superior strength when encountering objects in the blade path. Round on 60" & 72"; oval on 84".



Roundback with a Smooth Top.

The RCF27 Series Rotary Cutter is a smooth top version of our RCR26 Series, offering the same great cut and ideal for grass, weeds, crops, brush and small trees up to 3 inches in diameter. These units come equipped standard with a 3/16" thick heavy-duty stump jumper and replaceable bolt-on skid shoes. Optional shields are available for the front and rear.



3"
CUTTING
CAPACITY

← 3" →



	RCF2760	RCF2772	RCF2784
Horsepower	35-130 HP		60-130 HP
Hitch	Cat. 1 & 2		Cat. 2 & 3, Pull-Type
Working Width	60" (152)	72 (183)	84 (213)
Weight - lb (kg)	955 (433)	1072 (486)	1354 (614), Pull-Type: 1632 (740)
Cutting Height	1-1/2" - 12"		
Cutting Capacity	3"		
Deck	All Welded, Smooth Top		
Deck Thickness	10 Gauge		
Deck Height	11-1/4"		10-1/8"
Side Thickness	1/4"		
Safety Guards	Front: Chain or Rubber, Rear: Chain		
Skids	Replaceable		
Blades	Free Swinging High Suction, 1/2" x 4" - Heat Treated		
Blade Bolt	Keyed with Hardened, Flat Washer & Lock Nut		
Blade Tip Speed	12,384 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
Gearbox Rating^	130 HP		
Gearbox	540 RPM 1-3/8" - 6 Spline		
Gearbox Output Shaft	2"		
Driveline	ASAE Cat. 4 with 4 Plate Slip-Clutch		
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings		

*See dealer for complete warranty information.

^Based on field performance.

Color Options:

Quick Hitch
SYSTEM

5 YEAR
Limited Gearbox
Warranty

- Replaceable skid shoes
- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model, Standard on Pull-Type

Our RCF36 Series Rotary Cutter is a Brute!

This cutter is capable of cutting heavy grass and weeds, row crop stubble, thick brush, and small trees up to 4" in diameter.



	RCF3660	RCF3672	RCF3684
Horsepower	50-190 HP	60-190 HP	Lift: 70-190 HP Pull: 50-190 HP
Hitch	Cat. 1 & 2		Cat. 2 & 3, Pull-Type
Working Width (cm)	60" (152)	72" (183)	84" (213)
Overall Width	66-1/2"	78-1/2"	90-1/2"
Overall Length	112-1/2"	124-3/4"	130", 179-1/2" Pull
Weight - lb (kg)	1233 (559)	1337 (606)	2000 (907), Pull-type 2104 (954)
Cutting Height	2" - 12"		
Cutting Capacity	4"		
Deck	All Welded, Smooth Top		
Deck Thickness	3/16"		
Deck Height	13-3/8"		
Side Thickness	1/4"		
Safety Guards (Choose)	Front: Rubber, Sgl or Dbl Chains, Rear: Sgl or Dbl Chains or Band		
Skids	Replaceable		
Blades	Free Swinging High Lift, 1/2" x 4", Heat Treated Steel		
Blade Bolt	Keyed with Hardened, Flat Washer & Lock Nut		
Blade Tip Speed	13,572 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 30-7/16", Round, Dish Shaped		
Gearbox Rating^	210 HP		225 HP
Gearbox	540 RPM, 1-3/4" - 20 Spline		
Gearbox Output Shaft	2-3/8"		
Driveline	ASAE Cat. 5 with 4 Plate Slip-Clutch		
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-type		

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



4"
CUTTING
CAPACITY


- Replaceable skid shoes
- Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model
- Optional Shredder Kit makes quick work of prunings and crop residue.

4"



Right for the Job.

The RCD1884 Rotary Cutter offers a smooth deck for easy cleaning, shorter in length than single spindle cutters to help you maneuver tight spaces, as well as being ideal in orchard-type applications.

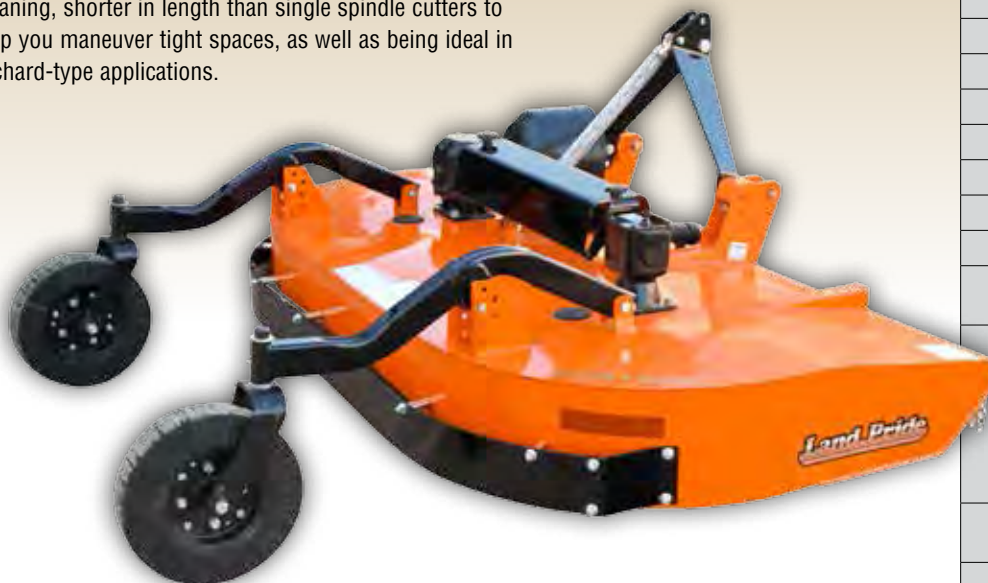

	RCD1884
Horsepower	35-60 HP
Hitch	Cat. 1 QH
Working Width (cm)	84" (213)
Weight - lb (kg)	900 (408)
Cutting Height	2"-12"
Cutting Capacity	1-1/2"
Offset	10"
Deck	All Welded
Deck Thickness	10 Gauge
Deck Height	11-5/8"
Safety Guards	Front: Rubber or Chain Rear: Metal Band
Skids	Weld-on
Additional Skids	Bolt-on
Blades	2 Each, 1/2" x 4" x 16" Heat Treated Free Swinging Alloy Steel Suction Blades
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Speed	11,693 fpm
Dishpan	10 Ga. x 24", Round, Dish Shaped
Gearbox Rating [^]	90 HP Main; 45 HP Side
Gearbox	540 RPM, Beveled Gears, Cast Iron Housing
Driveline	Cat. 3 with 2-Plate Slip-Clutch
Tailwheels	15" Laminated Tire or 4" x 16" Molded Rubber

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:



- Deep deck design
- All welded deck
- Short coupled for tight spaces
- Clevis style hitches
- Offset to cover your tractor tire and get closer to obstructions

1-1/2"
CUTTING
CAPACITY

1-1/2"

1-1/2"
CUTTING
CAPACITY

A perfect fit for any size farm.

The RCR25 Series is just perfect for those medium sized chores. Designed for performance in pastures, set aside acres, roadsides, and routine farm maintenance.

Pull-type — The Pull-type model features two leveling rods that connect the rear axle to the front tongue. This enables the deck to stay level over uneven ground conditions. The height controlling axle cylinder is attached to two deck springs that help cushion the cutter in rough terrain.

3-Point — The 3-point unit utilizes two castoring laminated tailwheels for smooth, trouble-free performance. The easy to attach clevis hitch is designed to fit Cat. 1 or 2 tractors on the 96" model, and Cat. 2 or 3 tractors on the 10' model.



Narrow tongue on pull-type allows for tight turns.

	RCR2596	RCR2510
Horsepower	Pull: 40-110 HP 3-Pt: 50-110 HP	Pull: 50-110 HP 3-Pt: 60-110 HP
Hitch	Cat. 1 & 2	Cat. 2 & 3
Working Width (cm)	7'10" (239)	9'10" (300)
Overall Width	8'3-3/4"	10'3-1/2"
Overall Length	Lift - 8'10", Pull - 11'8-3/4"	Lift - 9'4", Pull - 12'6"
Weight - lb (kg)	3-Pt: 1,380 (625) Pull: 1,665 (755)	3-Pt: 1,750 (793) Pull: 2,035 (923)
Deck Material Thickness	10 Gauge	
Deck Height	9-5/8"	
*Safety Guards (choose)	Front or Rear Chain / Front or Rear Rubber	
Skids	Replaceable	
Gearbox Rating^	210 HP Splitter 90 HP Outboard	
Gearbox	540 rpm, Cast Iron Housing, Beveled Gears	
Cutting Height	2" - 12"	2" - 10-1/2"
Cutting Capacity	1-1/2"	
Blades	1/2" x 4" Heat Treated, Free-Swinging Suction Blades	
Blade Tip Speed	14,592 fpm	17,749 fpm
Dishpan	3/16", Round, Dish Shaped	
Driveline	ASAE 4 Plate Slip-Clutch	
Tailwheel	Lift-Type: 2 each, 4" x 8" x 15-1/4" Laminated Pull-Type: 2 each, 6" x 9" x 21" Laminated or 24" Aircraft Tires	

*See dealer for complete warranty information.

^ Based on field performance.

Color Options:



- Slip-clutch and impact absorbing cross shafts to outer gearboxes
- Constant Velocity U-Joint option on 10' Pull-type
- Slip-clutch protection on main driveline
- Fully welded 10 Gauge deck
- Round back design
- Chain or rubber shield option
- Full length skids with replaceable shoes
- 1" x 4" Blade bar



Performance in a Medium-Duty Cutter.

The RCF30 Series is the perfect medium-duty cutter for pastures and roadside applications. Available in 3-point, semi-mount or pull-type, the RCF30 features a 2-1/2" cutting capacity and 1/4" side skirts. Plus, every RCF30 comes with the rugged dependability that Land Pride Rotary Cutters are known for.



Semi-Mount with Heavy-Duty Toolbar Axle



3-Point with Dual Beam Axle

	RCF3096	RCF3010
Horsepower	3-Pt: 50-110 HP Semi & Pull: 40-110 HP	3-Pt: 60-110 HP Semi & Pull: 50-110 HP
Hitch	Cat. 1 & 2 QH	Cat. 2 & 3 QH
Working Width (cm)	8' (244)	10' (305)
Overall Width	8'7"	10'6-1/2"
Overall Length (3-Pt w/Twin Beam Axle)	102"	122"
Weight - lb (kg) (3-Pt w/Twin Beam Axle)	1,587 (720)	2,004 (909)
Blade Tip Speed	16,360 fpm	540: 17,100 FPM; 1000: 17,300 fpm
Deck Material Thickness	10 Gauge	
Side Skirt Thickness	1/4"	
Gearbox Rating[^]	Outboard: 130 HP, Center 210 HP	
Gearbox	540 RPM	540 RPM or 1,000 RPM
Cutting Height	2" - 12"	
Cutting Capacity	2-1/2" Diameter	
Shielding	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
Skids	Replaceable	
Deck Height	11-1/4"	11-1/2"
Blades	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
Dishpan	3/16" Round, Dish Shaped	
Driveline	3-Point & Semi-Mount: ASAE Cat. 4 Pull-type: ASAE Cat. 4 Equal Angle or CV	
Driveline Protection	Slip-Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
Tires	3-Point: 15" or 21" Laminated Pull-Type: 21" Laminated, 24.5" Foam Filled, or 29" Aircraft Semi-Mount: 15" or 21" Laminated	

*See dealer for complete warranty information.

[^] Based on field performance.

Color Options:




Bigger and Better.

Building on the success of the RCR35 Series, Land Pride is proud to offer the RCF36 Dual-Spindle Rotary Cutter – an updated, heavy-duty, flat-top version of the original RCR35. With larger gear boxes, larger cutting capacity, and a deeper deck, the RCF36 is the ideal dual-spindle cutter for narrow areas in pastures, along roadsides, or in tree groves.



Semi-Mount

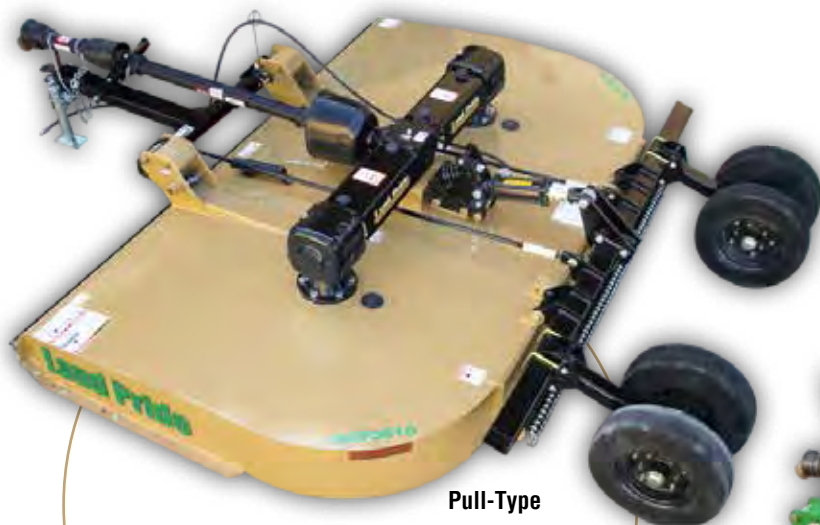

Pull-Type



3-Point with Tool Bar

	RCF3696	RCF3610
Horsepower	3-Pt: 50-130 HP Semi: 40-130 HP Pull: 50-130 HP	3-Pt: 60-130 HP Semi & Pull: 50-130 HP
Hitch	Cat. 1 & 2 QH	Cat 2 & 3 QH
Working Width (cm)	8' (244)	10' (305)
Overall Width	8'7"	10'6-1/2"
Overall Length (3-Pt w/Rigid Axle & Chains)	8'10"	10'2"
Weight - lb (kg) (3-Pt w/Rigid Axle & Chains)	1,838 (834)	2,310 (1048)
Cutting Height	2" - 12"	
Cutting Capacity	3" Diameter	
Deck Thickness	10 Gauge	
Deck Height	13"	
Side Thickness	1/4"	
Safety Guards (Choose)	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
Skids	Replaceable	
Blades	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	540: 17,100 fpm; 1000: 17,400 fpm	540: 17,100 fpm; 1000: 17,400 fpm
Dishpan	3/16" Round, Dish Shaped	
Gearbox Rating[^]	Outboard: 210 HP, Center 210 HP	
Gearbox	540 RPM or 1,000 RPM	
Driveline	3-Point & Semi-Mount: ASAE Cat. 4 Pull-Type: ASAE Cat. 4 Equal Angle or CV	
Driveline Protection	Slip-Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
Tires	3-Point & Semi-Mount: 15" or 21" Laminated Pull-Type: 21" Laminated, 24" Foam Filled or 29" Aircraft	

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:




Built Land Pride Tough.

The RCFM4014 3-Spindle, Rigid Deck Rotary Cutter complements our line of Land Pride Rotary Cutters. This cutter features a 14' cutting width and is built Land Pride-tough for years of dependable use in the most demanding conditions – from cotton and row-crop shredding to pasture clearing.

The heavy-duty RCFM4014 boasts a 3" cutting capacity, Cat. 4 Cross Shafts with a spring-loaded flex coupler, 1 1/4" 20 spline Cat. 5 input shaft, 1 3/4" output shaft, tip speed of 15,000 fpm, and gearbox ratings of 210/250 HP for the outboard boxes and T-box respectively.

The RCFM4014 can be equipped with either cutting blades bolted to a dish pan for cutting grass, weeds, and brush, or with a blade bar and shredder kit option for shredding all widths of row crops into small pieces. Fixed blades can also be added to the blade bar and shredder kit option for shredding row crops in 30" row widths or 38" to 40" row widths to reduce stalks into even smaller pieces.

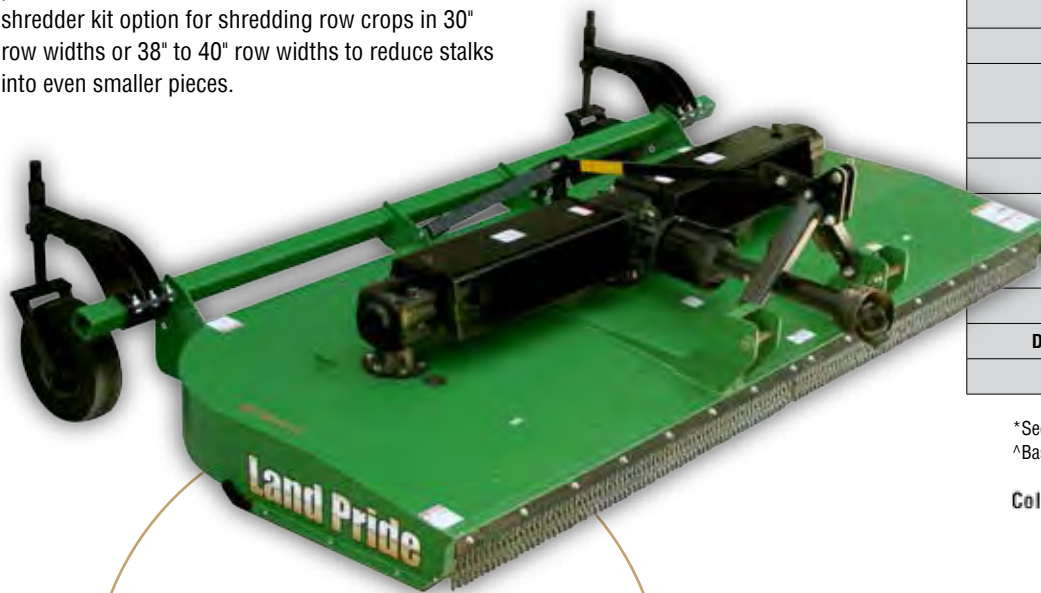

	RCFM4014
Horsepower	80-250 HP
Hitch	Cat. 2 & 3
Working Width (cm)	14' (427)
Overall Width	14' 6-1/2"
Overall Length	10' -1/2"
Weight - lb (kg)	3,095 (1,404)
Cutting Height	2" - 12"
Cutting Capacity	3" Diameter
Deck Thickness	10 Gauge
Deck Height	12"
Side Thickness	1/4"
Safety Guards (Choose)	Front: Rubber or Single Chain Rear: Rubber, Single Chain or Metal
Skids	Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Blades
Blade Tip Speed	15,000 fpm
Dishpan	3/16" Round
Gearbox Rating^	Outboard: 210 HP, Center 250 HP
Gearbox	1,000 RPM
Driveline	ASAE Cat. 5
Driveline Protection	4-Plate Slip-Clutch
Tires - 2 or 3	21" Laminated

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



	DB(M)2660
Horsepower	75 HP; Min. Tractor Weight 7,000 lbs.
Hitch	Cat. 2 Std., Cat. 2 & 3 QH Clevis Type Lower Hitch
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min. Tractor Weight - lb	7,000
Weight - lb (kg)	1,788 (811)
Tractor Hydraulics Req'd	See specific model
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	2 Duplex Required
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	Depends on 3-Pt Height
Cutting Capacity	2" Diameter
Horiz. Extension	32" Maximum
Max. Horizontal Reach from Tractor Center	13'2"
Operating Tilt Arc	175 Degrees
Deck Thickness	10 Gauge
Safety Guards	Rubber, Single or Dbl Chain
Blades	2 Each, 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,600 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 4
Storage	Parking Stand
Options	Rear Tailwheel, Side Gauge Wheel

Color Options:



Quickly Reach Inclines.

New from Land Pride, the DB2660 Ditch Bank Rotary Cutter enhances our growing line of Rotary Cutters. This new hydraulic-driven cutter boasts a number of features that will make mowing ditch banks, pond dams, or other hard to reach inclines fast, easy, and efficient.

Built for either 540 or 1000 RPM tractors, the DB2660 features a 58" cutting width, 1" cutting diameter, and 32" cutting reach. The 1/2" by 4" blades rotate clockwise at 15,000 FPM, directing debris away from the tractor. Minimum cutting height is dictated by the tractor's 3-pt height.

2"
CUTTING
CAPACITY

← 2" →



Hydraulic Driven Parallel Arm Rotary Cutter.

Designed to “reach out” and cut along roadsides, over guard rails, down ditchbanks, and along side ponds, Land Pride’s RCP26 has features not found on your typical Parallel Arm Rotary Cutter.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change; thanks to the parallel arm design. Lift the cutter head up, in or out to negotiate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the RCP is also not found on your standard parallel arm cutter. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

The cutter deck is operated by a hydraulic motor, which is run by a pump powered by the PTO of the tractor utilizing the tractor hydraulics, or an optional self contained system. A flow control valve is standard equipment to protect the hydraulic system of the cutter from the high GPM many of the newer tractors now utilize. The 35 gallon oil reservoir keeps the unit running cool, and the in-line filter continually cleans the oil each time it is returned to the reservoir.

The optional electronic package enables each of the arm and deck hydraulic cylinders to be activated by a push button switch. You get instant response from the cylinders, which can be very difficult to achieve with just the tractor’s hydraulic controls.

Moving this cutter up and around obstacles, in and out next to water or roadsides is what this cutter is all about. Save time and work efficiently with the parallel arm cutter that does more!



Optional gauge wheel deck allows the cutter to float over undulations without having to constantly monitor terrain conditions.



← 2" →

	RCP2660
Horsepower	75-150 HP
Hitch	Cat. 2 & 3
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min. Tractor Weight - lb (kg)	8000 (3629)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor Provided or Self Contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	2"
Cutting Capacity	2" Diameter
Horiz. Cutting Reach	15'6" Maximum
Vertical Cutting Reach	11'5" Maximum
Below Ground Level Reach	9'1" Maximum
Operating Tilt Arc	180 Degrees
Deck Thickness	10 Gauge
Safety Guards	Front and Rear Chain Guards
Blades	2 Each, 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,600 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 3
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Options	Operator Shield Suitcase Weight Bracket Gauge Wheels



In-line filter cleans hydraulic fluid before it re-enters reservoir.

3 Foot longer reach than the RCP26 Series.



Great for those roadsides that want a manicured look further down the ditch, or being able to stay a little further away from the soggy banks of the pond.

TOP QUALITY FEATURES ON RCP26 AND RCP30



Hydraulic breakaway feature pivots arm backward to avoid obstacles and protect cutter arm. Hydraulically pivots back into place.



Flow control valve compensates for various hydraulic systems.



Shut-off valve permits maintenance without oil loss.



The built in weight rack can be ordered to fit with various suitcase weight styles.



Grease zerks at all pivot points.



Optional Self-contained hydraulics.



Electronic cylinder controls provide instant response for adjustments on the go.

	RCP3060
Horsepower	95-175 HP
Hitch	Cat. 2 & 3
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min Tractor Weight - lb (kg)	12,000 (5443)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor Provided or Self Contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	2"
Cutting Capacity	2" Diameter
Horiz. Cutting Reach	18'10" Maximum
Vertical Cutting Reach	13'5" Maximum
Below Ground Level Reach	11' Maximum
Operating Tilt Arc	180 Degrees
Deck Thickness	Front and Rear Chain Guards
Safety Guards	10 Gauge
Blades	2 Each 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 3, 1 3/8" 21 Spline
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Options	Operator Shield Suitcase Wt. Bracket (Required) Gauge Wheels

Additional tractor weight (dual tractor wheel, calcium, etc.) may be needed.

Color:



- Hydraulic break away and reset
- Case drain deck motor
- Gauge wheel package allows unit to follow ground contour while operating in float position



Mow Like the Big Boys!

Designed with smaller tractors and smaller areas to cut in mind, our 12' Rotary Cutter has a lot of the features found in our larger folding cutters. The 12' width, sharp turning radius, and low tongue weight makes this an ideal rotary cutter for compact tractor owners.



RANGER
Series 2



1-1/2"
CUTTING
CAPACITY

1-1/2"

- Center spring-cushioned axle
- Great size for country estates
- Dual hinge rods for levelling
- Narrow tongue design for tight turns

	RC2512
Horsepower	40-100 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling
Working Width (cm)	12' (366)
Min. Transport Width	7'11"
Overall Width	12'7"
Overall Length	13'3"
Machine Weight - lb (kg)	2,540 (1152)
Tongue Weight - lb	793
Cutting Height	1-1/2" - 12"
Cutting Capacity	1-1/2"
Deck Thickness	10 Gauge
Deck Height	11"
Deck Shock Protection	Spring Cushioned Center Axle
Side Skirt Thickness	3/16" Plate
Safety Guards	Front and Rear Chain - Std
Skid Shoes	Wings & Center, Replaceable
Blades	2 per Section, 1/2" x 3" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center: 16,500 fpm, Wings: 16,000 fpm
Dishpan	10 Gauge, Round, Dish Shaped with 1" x 3-1/2" Blade Bar
Wing Cutting Angle	22 Deg. Down, 45 Deg. Up
Wing Transport Locks	Standard
Wing Hydraulics	2" x 8" Cylinder, Hoses & Fittings
Height Adjustments	2-1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Gearbox Rating^	540 rpm: 160 HP Divider; 100 HP Center & Wings
Gearbox Input Shaft	1-3/8" 6 Spline
Gearbox Output Shaft	1-1/2"
Input Driveline	Constant Velocity U-Joint, Cat. 4
Connecting Driveline	Cat. 3 Slip-Clutch
Wheels (4)	21" Laminated Tires 20.5" Aircraft Tires Tapered Roller Bearings & Cast Iron 5-Bolt Hubs with 1-3/4" Shaft
Optional	Light Kit

*See dealer for complete warranty information.

^Based on field performance.

Color Options:

5 YEAR
Limited Gearbox
Warranty

Quality with value built in.

Land Pride has packaged our renowned quality and dependability into an economy 15' Cutter. With a 1 year hitch-to-tailwheel warranty, plus a 5 year gearbox warranty, the RC2515 will give you years of dependable service and acres and acres of cut grass.



Optional 29" Aircraft tires provide extra cushioning over laminate tires.



The Land Pride gearbox features a 1 1/8" output shaft.



Deck-mounted spring cushion provides a smooth ride in rough terrain.



Wings are leveled with easy-to-access and easy-to-adjust turnbuckles.



All three connecting drivelines offer two-plate slip clutch protection.



	RC2515
Horsepower	50-100 HP
Hitch	Pull-Type; Self Leveling Hitch & Clevis
Working Width	15'
Min. Transport Width	8' 4"
Overall Width	15' 7"
Overall Length	15' 6"
Machine Weight	3,255 lb.
Tongue Weight	1123 lb.
Cutting Height	2" - 13"
Cutting Capacity	1 1/2"
Deck Thickness	10 Gauge
Deck Height	11 1/4"
Deck Shock Protection	Spring Cushioned
Side Skirt Thickness	1/4" Plate
Safety Guards	Front and Rear, Chain or Rubber
Skid Shoes	Wings & Center, Replaceable
Blades	2 per Section, 1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center & Wings: 15,000 fpm
Dishpan	10 Gauge, Round, Dish Shaped with 1" x 4" Blade Bar
Wing Cutting Angle	22 Deg. Down, 45 Deg. Up
Wing Transport Locks	Standard
Wing Hydraulics	2 1/2" x 10" Cylinder, Hoses & Fittings
Height Adjustments	2 1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Gearbox Rating^	540 rpm: 160 HP Divider; 100 HP Center & Wings
Gearbox Input Shaft	1 3/8" 6 Spline
Gearbox Output Shaft	1 5/8"
Input Driveline	Constant Velocity U-Joint, Cat. 4
Connecting Driveline	Cat. 3 Slip-Clutch
Wheels (4 or 6)	21" Laminated Tires 29" Aircraft Tires
Optional	Light Kit

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



Give your pasture that well-groomed look!

2-1/2"
CUTTING
CAPACITY

Deck Rings
Available!

2-1/2"

The 1" thick, 4" wide reinforcement aids the dishpan in withstanding the constant punishment the overall drivetrain must endure.

PLAINSMAN
Series 2

The heavy-duty turnbuckle keeps the center and wing axles at the same cutting height. With grease fittings incorporated in the turnbuckle, free motion is maintained for quality performance.

- 1" Solid and continuous hinge rods provide superior support from section to section
- Smooth top for easy clean off

	RC3615 MEDIUM DUTY
Horsepower	50-160 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	8'
Overall Length	15' 6"
Machine Weight - lb (kg)	3,730 (1692)
Tongue Weight - lb	1,240
Cutting Height	2" - 14"
Cutting Capacity	2-1/2"
Height Adjustment	3" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Deck Thickness	10 Gauge
Deck Height	12"
Deck Shock Protection	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber
Skid Shoes	Wings and Center, Replaceable
Blades (2 per section)	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 15,268 fpm on Center, 15,000 fpm on Wings 1000 RPM: 15,578 fpm on Center, 14,620 fpm on Wings
Dishpan	3/16" Round, Dish Shaped with 1" x 4" Blade Bar
Hydraulics	Wings: 2-1/2" x 12" Cylinder, Hoses & Fittings
Gearbox Rating [^]	540 or 1000 RPM: 160 HP Divider, 130 HP Center & Wings
Gearbox Output Shaft	2"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 4 with Slip-Clutch
Max. Turning Angle	80° w/Constant Velocity U-Joint
Tires - 4 or 6	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options: 

5 YEAR
Limited Gearbox
Warranty

The Best of Both.

Combine the rugged, heavy-duty gearboxes from our RC5615 and the proven, dependable deck from our RC3615 and you get the Land Pride RC4015. With a 3-1/2" cutting capacity and a blade tip speed of 16,300 fpm, the RC4015 is a solid medium-duty cutter in a long line of quality folding cutters from Land Pride.

RANCHER

See a Video of the RC4015
at landpride.com



3-1/2"
CUTTING
CAPACITY

3-1/2"



	RC4015
Horsepower	50-200 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 9"
Min. Transport Width	8'
Overall Length	15' 6"
Machine Weight - lb (kg)	3,930 (1782)
Tongue Weight - lb	1,300
Cutting Height	2" - 14"
Cutting Capacity	3-1/2"
Height Adjustment	3" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Deck Thickness	10 Gauge
Deck Height	12"
Deck Shock Protection	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber
Skid Shoes	Wings and Center, Replaceable
Blades (2 per section)	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,288 fpm on Center, 16,000 fpm on Wings
Dishpan	3/16" Round, Dish Shaped with 1" x 4" Blade Bar
Hydraulics	Wings: 2-1/2" x 12" Cylinder, Hoses & Fittings
Gearbox Rating ^A	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 4 with Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 4 or 6	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

^ABased on field performance.

Color Options:



RC4615 15' FOLDING ROTARY CUTTER

HP
50-250

HITCH
Pull-Type



WRANGLER

Land Pride's RC4615 combines the best of our RC4015 and RC5615, along with a host of new features, to create a soon-to-be leader in the folding cutter market.

Combine Land Pride's proven deck design of the RC4015 with the rugged gearboxes from our RC5615; then add in the dependable axles and drivelines from the RC5615 and the new RC4615 is born. Made for pasture maintenance yet heavy enough for contractor use, the RC4615 is a solid, heavy-duty cutter from the leader in Folding Rotary Cutters.

The RC4615 boasts some impressive features: 3.5" cutting capacity, 250 HP splitter gearbox, 210 HP center and wing gearboxes, Cat. 6 main driveline, Cat. 4 wing drivelines, 10 gauge solid welded deck, and beveled skid shoes to prevent gouging.



Drivelines on the RC4615 feature end-cap grease zerks for superior serviceability.



Beveled wing skid shoes prevent gouging when traveling over uneven terrain.



PTO Support bracket aids in hooking up heavy drivelines then folds away when cutter is in use.



New from LP – our self-leveling Performance Hitch is draw-bar friendly and easy for one person to hook up.

	RC4615 HEAVY-DUTY
Horsepower	50-250 HP
Hitch	Pull-Type, Standard Clevis, LP Performance Self-Leveling, Ball, Pintle, or Bar-Tite Hitch
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	10'3"
Overall Length	16'
Machine Weight - lb	4,550
Cutting Height	2" - 14"
Cutting Capacity	3-1/2"
Tongue Weight - lb	1,650
Deck Thickness	10 Gauge Top
Deck Height	12"
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber Guard
Skid Shoes	Wings and Center, Replaceable, Beveled to prevent gouging
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings; 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Dishpan	3/16", Round, Dish Shaped with 1" x 4" Blade Bar
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axles: 3" x 8"
Gearbox Rating[^]	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 spline
Input Driveline	Cat. 6 CV
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 Driveline Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:

7 YEAR
Limited Gearbox
Warranty

Smooth top and bottom design.

Land Pride's 56 Series, 15 foot cutter is smooth on top, which allows debris and moisture to roll off or be easily swept or blown off. And its smooth on bottom, which means less chance of dry caking material getting lodged in tight corners, which again, means less time for cleaning.



Heavy-Duty Dishpan
This is spin balanced for smooth operation.

- 9' 1" Transport Width
- Smooth top and bottom design
- Replaceable 1/4" side skirts with replaceable skid shoes
- High blade tip speed



	RC5615 HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9' 1"
Overall Length	16'
Machine Weight - lb (kg)	5,446 (2470)
Cutting Height	2" - 14"
Cutting Capacity	4"
Tongue Weight - lb	2,080
Deck Thickness	7 Gauge Bottom; 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber Guard
Skid Shoes	Wings and Center, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings; 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Dishpan	3/16", Round, Dish Shaped with 1" x 5" Blade Bar
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axles: 3-1/2" x 8"
Gearbox Rating^	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 Driveline Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



Nothing stands in our way!

The extra heavy-duty 66 Series Rotary Cutter has that extra muscle to cut in extreme conditions, and still give you the excellent appearance when completed. Cutting 4-1/2" material allows you to tackle a great deal of obstacles when cleaning up neglected pastures or fields.




DOMINATOR

4-1/2"
CUTTING
CAPACITY

4-1/2"

Optional full welded deck rings keep blades from damaging the deck.

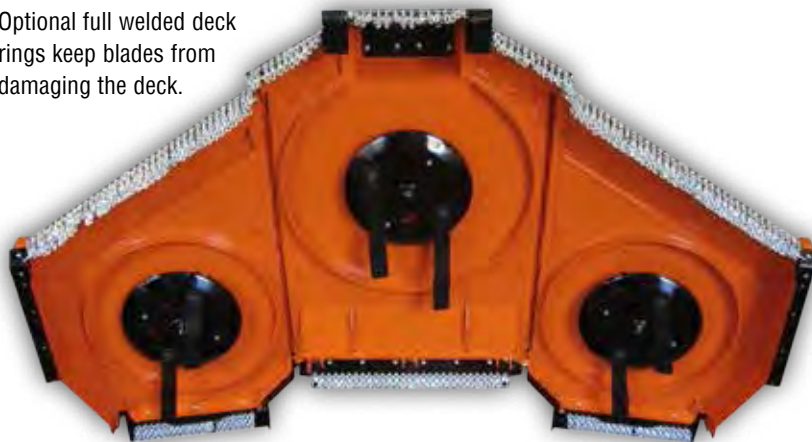

Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

	RC6615 EXTRA HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9' 1"
Overall Length	16'
Machine Weight - lb (kg)	5,660 (2567)
Cutting Height	2" - 14"
Cutting Capacity	4-1/2"
Tongue Weight - lb	2,080
Deck Thickness	7 Gauge Bottom, 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Independent Wheel Arm Springs
Deck Rings	Optional
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front: Single or Double Chain, Double Chain Guard w/Cable, or Rubber Guard Rear: Single or Double Chain, Double Chain Guard w/Cable, or Rubber Guard
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped with 1" x 5" Blade Bar
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox Rating [^]	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:



Go all in with your next bid!




DOMINATOR

All of the features found on our RC66 Series Rotary Cutter and more!

**4-1/2"
CUTTING
CAPACITY**



Extra Heavy-Duty Dishpan
Our 1" thick plate adds superior strength to our dishpan.



Our RCB66 Series Rotary Cutters offer many of the additional features that counties, states, and contract cutters are looking for.

- 4-1/2" Cutting capacity
- 7 Gauge bottom, 10 gauge top
- 12" Deck height
- Extra heavy-duty gearboxes with 2-3/8" output shafts
- Spring cushioned axle
- Optional deck rings
- Optional tool box*
- Rephasing cylinders on wing axles for levelling the wings
- Optional walking tandem axles on center and wings for a smoother pull
- Independent wing hydraulics
- Cable winch (optional) for raising or lowering the wings in a hydraulic failure
- Wing skid shoe: AR400 steel*
- SMV Sign*

Also available in a 10' offset model.

*Unique to this series.

	RCB6615 EXTRA HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9'1"
Overall Length	17' 1"
Machine Weight - lb (kg)	5,738 (2603)
Cutting Height	2" - 14"
Cutting Capacity	4-1/2"
Tongue Weight - lb	1,842
Deck Thickness	7 Gauge Bottom, 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front: Single or Double Chain, Dbl Chain w/Cable, or Rubber Guard Rear: Single or Double Chain, Dbl Chain w/Cable, or Rubber Guard
Skid Shoes	2 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped with 1" Steel Plate Support
Hydraulics	6" Wings: 3-1/2" x 8" Cylinder Axle: Center-3-1/2" x 8" Cylinder RH Wing-3-1/4" x 8", LH Wing-3" x 8"
Gearbox Rating [^]	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 5 Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:

7 YEAR
Limited Gearbox
Warranty



Making roadside cutting safe and efficient.



RC5610

Land Pride's wheel base offers a smoother pull of the cutter, which holds slopes better and reduces overall operator fatigue.



- Left hand weight box
- 5 or 6 Wheel option
- Optional hitch configurations
- Optional deck rings
- Replaceable 1/4" sideskirt with replaceable skid shoe (RC56/66 only)
- Smooth top design
- Heavy-duty dishpans (RC56/66 only)
- 3-1/2" Cutting capacity on RC46
- 4" Cutting capacity on RC56
- 4-1/2" Cutting capacity on RC66

*See dealer for complete warranty information.
^Based on field performance.

Color Options:



	RC4610	RC5610	RC6610
Horsepower	50-250 HP		
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite		
Working Width (cm)	10' 6" (320)		
Overall Width	11' 8"	11' 7"	
Min. Transport Width	8' 10"	7' 6-1/2"	
Overall Length	15' 6"	16' 5"	
Machine Weight - lb (kg)	4,240 (1923)	5,292 (2400)	
Cutting Height	2" - 14"		
Cutting Capacity	3-1/2"	4"	4-1/2"
Tongue Weight - lb	1,920	2,060	
Deck Thickness	10 Gauge	7 Gauge Bottom, 10 Gauge Top	
Deck Height	12"		
Deck Shock Protection	Independent Wheel Arm Springs; Optional Center Walking Tandems RC56/66 only		
Deck Rings	Optional		
Side Thickness	1/4"	1/4" Replaceable	
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable		
Safety Guards (must choose)	RC46: Front: Single or Double Chain Rear: Single or Double Chain		
	RC56/66: Front: Single or Double Chain, Double Chain with Cable, or Rubber Guard Rear: Single or Double Chain, Double Chain with Cable, or Rubber Guard		
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift		
Blade Bolt	Keyed w/Hardened Flatwasher & Lock Nut		
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings		
Blade Overlap	6"		
Dishpan	3/16" Round, Dish Shaped with 1" x 5" Blade Bar		
Hydraulics	RC46: Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: 3" x 8" Cylinder, Hoses, Fittings, & Stroke Control Spacers		
	RC56/66: Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings, & Stroke Control Spacers		
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, RC46/56: 210 HP Center & Wing RC66: 225 HP Center & Wing		
Gearbox Output Shaft	2-3/8"		
Gearbox Input Shaft	1-3/4" 20 Spline		
Input Driveline	Cat. 6 CV or Cat. 5 Conventional		
Connecting Drivelines	Cat. 4 or 5 with 5 Slip-Clutch		
Max. Turning Angle	80° with Constant Velocity U-Joint		
Tires - 5 or 6	21" Laminated, 29" Used Aircraft; 25.5" Foam-Filled		

Plainsman



Land Pride's RC3620 is the ideal Rotary Cutter for grassy fields, pastures, waterways, buffer strips, and set-aside acres and handles saplings up to 2" in diameter. With tips speeds of 16,000 to 16,500, gearboxes rated at 250 HP and 150 HP, 1-3/4" input shafts and 2" output shafts, and optional CV drivelines, this unit will make quick and efficient work of the largest jobs.

2"
CUTTING
CAPACITY



Also available as a 14' offset model: RC3614.

	RC3614	RC3620
Horsepower	70-160 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
Working Width (cm)	14' (426)	20' (607)
Overall Width	15'	20' 10"
Min. Transport Width	8' 9"	9' 11"
Overall Length	17' 6" with Laminated Tires	
Machine Weight - lb (kg)	5,990 (2717)	6,280 (2849)
Cutting Height	2" - 12"	
Cutting Capacity	2" Diameter	
Tongue Weight - lb	2,220	1,750
Max. Turning Angle	80° with Constant Velocity U-Joint	
Deck Height	13"	
Deck Thickness	10 Gauge	
Deck Shock Protection	Spring Cushioned Axle	
Deck Rings	Optional	
Side Thickness	1/4"	
Safety Guards (must choose)	Front & Rear: Single or Double Chain	
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable	
Blades	1/2" x 4" High Lift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 RPM: 16,000 fpm on Center, 16,000 fpm on Wings 1000 RPM: 16,500 fpm on Center, 16,500 fpm on Wings	
Blade Overlap	6"	
Dishpan	10 Gauge Round, Dish Shaped w/ 1" x 4-1/2" Blade Bar	
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: Center-2-3/4" x 8" Cylinder, RH Wing-3" x 8", LH Wing-3-1/4" x 8" Hoses, Fittings and Stroke Control Spacers	
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 150 HP Ctr & Wings	
Gearbox Output Shaft	2"	
Gearbox Input Shaft	1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV or Cat. 5 Conventional	
Connecting Drivelines	4-Plate Slip Clutch; Cat. 4	
Tires	21" Laminated RC3614: 5, 6 or 8 RC3620: 6 or 8 29" Used Aircraft 27" Foam-Filled	

*See dealer for complete warranty information.

^Based on field performance.

Color Options:



WRANGLER

RC4620 HEAVY DUTY	
Horsepower	70-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	20' (607)
Overall Width	20' 10"
Min. Transport Width	9' 11"
Overall Length	17' 6" with Laminated Tires
Machine Weight - lb (kg)	6,280 (2849)
Cutting Height	2" - 12"
Cutting Capacity	3" Diameter
Tongue Weight - lb	1,750
Max. Turning Angle	80° with Constant Velocity U-Joint
Deck Height	13"
Deck Thickness	10 Gauge
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,000 fpm 1000 RPM: 18,000
Blade Overlap	6"
Blade Bar	1" Thick, Standard
Dishpan	Round, Dish Shaped, Optional
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: LH Wing-2-3/4" x 8" Cylinder, RH Wing-3" x 8", Center-3-1/4" x 8" Hoses, Fittings and Stroke Control Spacers
Gearbox Rating [^]	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 5
Tires 6 or 8	21" Laminated 29" Used Aircraft 27" Foam-Filled

NEW!

Right of ways, roadsides, pastures, open areas, and row crop fields are all candidates for the RC4620. It handles brush up to 3" in diameter, features a 7-year gearbox warranty, and has blade tip speeds up to 18,000 fpm. The gearboxes are rated at 250 HP and 210 HP, center and wing respectively, and boast 20-spline, 1.75" input shafts and 2.375" output shafts. Our gearboxes come with a 7-Year Limited Warranty but unlike the competition, Land Pride pays parts AND labor for a full 5-Years! The main driveline is available as a Cat 6 Constant Velocity, wing drivelines are Cat 5.

Rephasing axles allow for shorter axles which in turn leads to less weight on the tractor draw bar. Also included is a new diamond blade bar with an optional bolt-on stump jumper. Decks feature 1/4" side skirts and smooth-top, 10 gauge decks.

- 1/4" Side Skirts
- Smooth-top, 10 Gauge Decks
- 2" to 12" Cutting Height
- 3" Cutting Capacity
- Diamond Blade Bar with optional Bolt-on Stump Jumper
- Choice of 3 Tires, including 21" Laminated, 29" Aircraft or 27" Foam Filled Tires
- Replaceable and Reversible Wing and Center Deck Skid Shoes
- Single or Double Chain Guarding
- Hydraulic Rephasing Cylinders on Axle
- Shorter Axle for Lower Draw Bar Weight
- Available Land Pride Performance Hitch
- Optional Fully-Welded Deck Rings
- Optional Light Kit

**3"
CUTTING
CAPACITY**

3"

Also available as a 14'
offset model: RC4614.

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:



14' - Largest offset cutter in the family!



A 14' swath on a roadside can knock out a lot of work in one pass. Equipped with extra heavy-duty gearboxes and drivelines, and a dish pan to help protect it all, this cutter is ready to go to work!

**3"
CUTTING
CAPACITY**

Commander

- Heavy-duty stump jumper
- Left side weight box



Choice of used aircraft tires w/wo foam or laminated tires.

Hitches Available on all 36 Series and above Folding Cutters



Standard Clevis Hitch
Pivots up and down for uneven terrain



LP Performance Hitch
This drawbar-friendly, self-leveling hitch pivots up, down, and side-to-side, and is held upright with the hitch pin to allow single-person hook-up.



Bar-tite™ Clevis Hitch
Bolts tight to drawbar which eliminates drawbar wear. Swivels up and down, and rotates on greasable shaft

	RC5014
Horsepower	70-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	13' 6"
Overall Width	14' 7"
Min. Transport Width	8' 9"
Overall Length	19' 3" w/Laminated Tires
Machine Weight - lb (kg)	7,282 (3303)
Cutting Height	2" - 14"
Cutting Capacity	3" Diameter
Tongue Weight - lb	2,300
Deck Thickness	3/16"
Deck Height	10-1/2"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Single or Double Chain or Rubber
Skid Shoes	1 on Wing and Weight Box, 2 on Center Section, Replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on Center, 17,329 fpm on Wings 1000 RPM: 18,165 fpm on Center, 18,317 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped w/1" Steel Plate Support
Hydraulics	Wings: 3-1/2" x 8" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox Rating [^]	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wing
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Slip Clutch; Cat. 5
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 5 or 6	21" Laminated, 29" Used Aircraft, 27" Foam-Filled

*See dealer for complete warranty information.

[^]Based on field performance.

Color Options:

7 YEAR
Limited Gearbox
Warranty




Be More Productive, 20' at a Time.

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for the 20' Commander. Wing decks float independently, and follow the contour of the land leaving a nicely cut surface.



The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications.

Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



Commander

	RC5020 HEAVY DUTY
Horsepower	70-250 HP
Hitch	Pull-Type
Working Width (cm)	20' (607)
Overall Width	20' 9-1/2"
Min. Transport Width	8' 9"
Overall Length	19' 3" with Laminated Tires
Machine Weight - lb (kg)	6,528 (2961)
Cutting Height	2" - 14"
Cutting Capacity	3" Diameter
Hitch	Standard Clevis, Swivel, Ball, Pintle, or Bar-Tite Hitch
Tongue Weight - lb	2,300
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Thickness	3/16"
Deck Height	10-1/2"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front and Rear: Single or Double Chain or Rubber
Skid Shoes	Reversible, 1 each wing, 2 on center section, replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on Center, 17,329 fpm on Wings 1000 RPM: 18,165 fpm on Center, 18,317 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped w/ 1" Steel Plate Support
Baffle Kit	Optional - Rear
Hydraulics	Wings: 3-1/2" x 12" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Tires 6 or 8	21" Laminated 29" Used Aircraft 27" Foam-Filled

*See dealer for complete warranty information.

^Based on field performance.

Color Options:    



Versatility to fit every need.

Our 05 Series Reverse Tine Rotary Tillers are perfect for popular subcompact tractors. If you are tilling your yard for reseeding, or getting the garden ready for spring planting, turn your ground over efficiently with the best small tiller available!

- Cast iron bearing mounts
- Adjustable rear deflector
- Front rubber flap to keep dirt in
- Lower hitch clevises for easier hook up to tractor



	RTR0542	RTR0550
Horsepower	Up to 25 HP	
Hitch	Cat. 1	
Width-endplate to endplate (cm)	42" (107)	50" (127)
Overall width	46-1/2" (118)	54-1/2" (139)
Weight - lb (kg)	268 (122)	298 (135)
Number of Flanges	5	6
No. of Blades per Flange	4 C-Shape	
Blade Spacing	7-7/8"	6-3/4"
Max. Tilling Depth	6-1/2"	
Skid Shoe Settings	4	
Rotor Swing Diameter	13"	
Rotor Shaft Speed	230 rpm at 540 rpm PTO	
PTO Driveline	ASAE Category 2 Off-Center Shear Bolt or Slip Clutch	
Gearbox	25 HP, 540 rpm, Cast Iron Housing, Drain Plug	
Drive Chain	#80 High Tensile in Oil Bath	
Sprockets	Hardened Teeth, Splined Center	

*See dealer for complete warranty information.

Tilling depth depends on conditions and fluffiness of tilled area.



The most popular Rotary Tiller for compact tractors!

The Land Pride RTA12 Series Forward-Till and RTR12 Series Reverse-Till Rotary Tillers are a great seedbed preparation tool for either general gardening or lawn/landscape seeding. With uses in many residential applications, Land Pride 12 Series Rotary Tillers offer an economical yet durable tilling solution. These units feature a 3 year gearbox warranty and a 10 year chain and sprocket warranty, 42", 50", 58", 66", 74" & 82" working widths, and 6-1/2" tilling depth.

- Offset capabilities
- Forward or Reverse models available
- Lower clevis hitch for easier hook-up
- Steel plate upper hitch



	RTA1242 RTR1242	RTA1250 RTR1250	RTA1258 RTR1258	RTA1266 RTR1266	RTA1274 RTR1274	RTA1282 RTR1282
Horsepower	15-40 HP		20-50 HP		25-60 HP	30-60 HP
Hitch	Cat. 1					
Width-Endplate to Endplate (cm)	42" (107)	50" (127)	58" (147)	66" (168)	74" (188)	82" (208)
Overall Width RTA RTR	47-3/8" 48-1/4"	55-3/8" 56-1/4"	63-3/8" 64-1/4"	71-3/8" 72-1/4"	79-3/8" 80-1/4"	87-1/8" 87-1/4"
Weight - lb (kg) RTA RTR	391 (177) 404 (183)	421 (191) 435 (197)	448 (203) 463 (210)	476 (216) 493 (224)	503 (228) 521 (236)	552 (250) 581 (264)
Number of Flanges	5	6	7	8	9	10
No. of Blades per Flange	4 C-Shape					
Blade Spacing	7-7/8"					
Max. Tilling Depth	6-1/2"					
Skid Shoe Settings	7					
Rotor Swing Diameter	15"					
Rotor Shaft Speed	211 rpm at 540 rpm PTO					
PTO Driveline	Category 2 Slip Clutch					
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug					
Drive Chain	#80 High Tensile in Oil Bath					
Sprockets	Hardened Teeth, Splined Center					

*See dealer for complete warranty information.


Color Options:



Sized right for hobby farms and nurseries.

The 15 Series Land Pride Rotary Tiller is sized just right for compact tractors that are used on hobby farms and in nurseries in every corner of the country.

The sideshift feature on the 15 Series Rotary Tillers enables you to shift the tiller to the right to cover a tire track or get closer to obstacles, while allowing the driveline to remain straight.

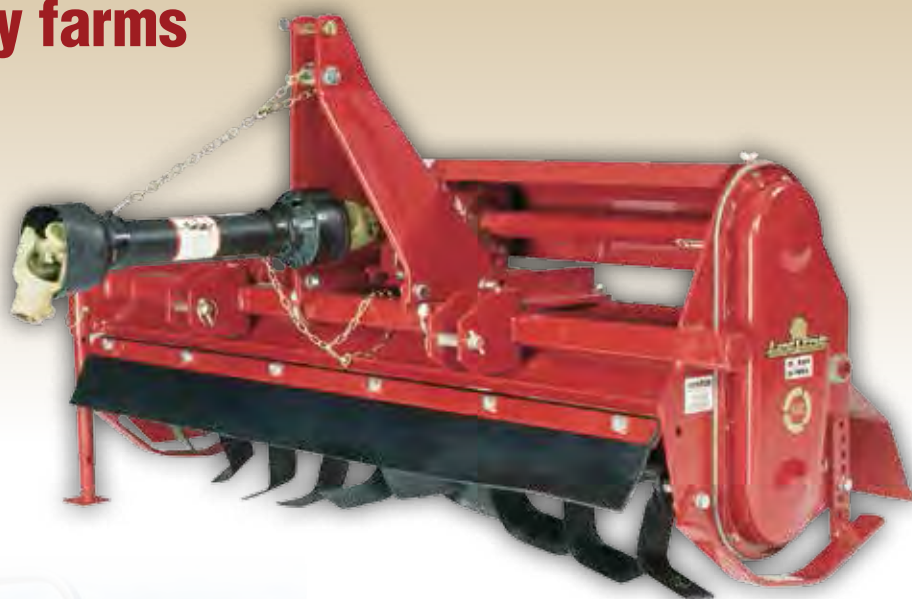

	RTA1558 RTR1558	RTA1566 RTR1566	RTA1574 RTR1574
Horsepower	17-50 HP		
Hitch	Cat. 1		
Width-Endplate to Endplate (cm)	58" (147)	66" (168)	74" (188)
Overall Width	64-1/4"	72-1/4"	80-1/4"
Weight - lb (kg)	489 (222)	523 (237)	557 (253)
Number of Flanges	7	8	9
No. of Blades per Flange	4 C-Shape		
Blade Spacing	7-7/8"		
Max. Tilling Depth	6-1/2"		
Skid Shoe Settings	7		
Rotor Swing Diameter	15"		
Rotor Shaft Speed	211 rpm at 540 rpm PTO		
PTO Driveline	ASAE Category 3, Off-Center Shear Bolt or Slip Clutch		
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug		
Drive Chain	#80 High Tensile in Oil Bath		
Sprockets	Hardened Teeth, Splined Center		

*See dealer for complete warranty information.
See page 48 for reverse-till diagram.

Color Options:



We have traditional Forward Rotation...

Available in two popular widths, the Land Pride RTA20 Series Rotary Tiller effortlessly turns up hard-packed ground, leaving a perfect seedbed for gardens or grass. Suited for up to 50 HP tractors, this model fits a wide range of tractor owners, from landscapers or city and park maintenance operations to golf course superintendents.

The Land Pride RTR20 Series Rotary Tillers are just right for home gardening, landscape work, food plot maintenance, and light commercial use. Available in 64" and 72" widths, RTR20 Series Rotary Tillers feature a reverse tilling action for tough ground conditions. The reverse action of the rotor brings material up and over the top, burying heavier clods and small rocks, leaving the fines on top for a perfect seed bed.

Both models use standard Land Pride features like a stamped chain cover, adjustable rear deflector, heavy-duty driveline and parking stand – in the end the quality and dependability shine through.



And the most popular Reverse Rotation...



	RTA2064	RTA2072	RTR2064	RTR2072
Horsepower	23-50 HP			
Hitch	Cat. 1			
Width-Endplate to Endplate (cm)	64" (162)	72" (183)	64" (162)	72" (183)
Overall Width	70-13/16"	77-7/8"	70-13/16"	77-7/8"
Weight - lb (kg)	689 (313)	734 (333)	748 (339)	795 (361)
Number of Flanges	8	9	8	9
No. of Blades per Flange	6 C-Shape			
Blade Spacing	7-1/2"			
Max. Tilling Depth	7"			
Skid Shoe Settings	7			
Offset	14"	18"	14"	18"
Number of Sifting Tines	N/A		43	48
Rotor Swing Diameter	17"			
Rotor Shaft Speed	220 rpm at 540 rpm PTO			
PTO Driveline	ASAE Category 3, Heavy Duty Shear Bolt or Slip Clutch			
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug			
Drive Chain	#80 High Tensile in Oil Bath			
Sprockets	Hardened Teeth, Splined Center			

*See dealer for complete warranty information.
Tilling depth depends on conditions and fluffiness of tilled area.
See page 48 for reverse-till diagram.

Color Options:



A contractor's dream.

Ideal for landscapers and gardeners, the Land Pride RTA25 Series Rotary Tillers prepare seedbeds for gardening or lawn planting. Rugged and dependable, the RTA25 features a heavy-duty driveline, a parking stand for easy hook-up, and optional down pressure springs apply pressure on the rear deflector, holding larger debris in the tines for better pulverization in tough leveling conditions.



	RTA2562	RTA2570	RTA3576
Horsepower	25-55 HP		35-75 HP
Hitch	Cat. 1		Cat. 1 & 2
Width-Endplate to Endplate (cm)	64" (162)	70" (178)	76" (193)
Overall Width	68"	76"	81-1/2"
Weight - lb (kg)	649 (294)	663 (301)	856 (388)
Number of Flanges	8	9	8
No. of Blades per Flange	6 C-Shape		6 C-Shape
Blade Spacing	7-7/8"		9"
Max. Tilling Depth	7"		7"
Skid Shoe Settings	6		6
Rotor Swing Dia.	17"		19"
Rotor Shaft Speed	220 rpm at 540 rpm PTO		204 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 3 Heavy Duty Shear Bolt or Slip Clutch		ASAE Category 4 Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug		75 HP 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 High Tensile in Oil Bath		#100 High Tensile in Oil Bath
Sprockets	Hardened Teeth, Splined Center		Hardened Teeth, Splined Center

*See dealer for complete warranty information.

Tilling depth depends on conditions & fluffiness of tilled area.

Color Options:



RTA35 SERIES:

Ready to tackle the tough stuff.

The RTA35 Series is Land Pride's toughest tiller, built to withstand the rigors of commercial jobs. The 35 Series Tiller is designed to go all day, day after day, in the most demanding jobs. With a 19" rotor swing diameter, this tiller can turn over a bunch of dirt without much getting in its way and is ideal for landscaping, nurseries, and commercial gardening applications.



Adjustable Lower Hitch

With a 76" working width, and adjustable lower hitch clevises, taking out your tire track is usually achievable. This allows for less overlap needed, meaning less time in the tractor seat.



Save time with reverse rotation.

Ground cover in your way? No problem for a Reverse Tine Tiller. It turns it up, chops it a time or two, and buries it under a cascade of large clods, which are buried under small clods. Large clods fall first, and they just get smaller as they pile on top of each other. What's left on top is a perfect seedbed to foster your wild imagination!



	RTR2570
Horsepower	25-55 HP
Hitch	Cat. 1
Width-Endplate to Endplate (cm)	70" (178)
Overall Width	76" (193)
Weight - lb (kg)	868 (394)
Number of Flanges	9
No. of Blades Per Flange	6 C-Shape
Blade Spacing	7-7/8"
Max. Tilling Depth	7"
Skid Shoe Settings	7
Offset	Up to 5"
Number of Sifting Tines	46
Rotor Swing Diameter	17"
Rotor Shaft Speed	220 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 3 Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 High Tensile in Oil Bath
Sprockets	Hardened Teeth, Splined Center



Sifting tines help "sift" the tilled material. Large or clumpy material fall first, with the top layer being a perfect consistency for planting.

*See dealer for complete warranty information.

Tilling depth depends on conditions & fluffiness of tilled area.

Color Options:



Rear deflector removed for photo.

- Spring-loaded rear deflector levels the freshly tilled seedbed
- Hinged front flap with rubber insert helps prevent damage to deck from debris coming over the top of the tines
- Skid shoe on drive side has additional chain case protection

The reverse rotation of the tiller tines forces the tiller in the ground, preventing "walking" on hard ground. Once it's in, it stays put!



SMALL SEEDS ATTACHMENT -

Utilizes a smaller version of the fluted seed cup to accurately meter tiny seeds like alfalfa, clover, and wildflowers.



Small Drills, Big Features.

The 3P500 Min-Till Drill is designed to get into places big drills simply can't; like wooded areas, orchards, and vineyards. These excel when seeding into fully prepared and minimum tillage plots. Add the optional small seeds box and plant two different seeds at the same time. The 3P500V offers a low profile box, ideal for orchards and vineyards.

	3P500, 3P500V
Hitch	3-Pt, Cat. 1 & 2
Primary Design	Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	9 - 6" spacing, 7 - 7-1/2" spacing
HP Requirements (min)	35 HP
Weight - lbs (kg)	1,200* (544), 1,100* (499)
Working Width	5'
Width	5'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure	90-180 lbs
Main Box Capacity	10 bu. (8.5 bu. Vineyard)
Small Seed Box	1.2 bu.

00 SERIES



Color: 

The 3P500V offers a low profile box, ideal for orchards and vineyards.



Gets Into Places Big Drills Simply Can't.

The 3P600 Min-Till Drill features a highly visible seed level indicator, extremely accurate fluted seed cups, V-bottom inserts on the inside of the seedbox that allow all the seed to be metered, and water tight lids that stay open for filling. This model is ideal for wooded areas.

The rugged 00 Series openers provide accurate and consistent seed placement. Openers have 7" of stagger to allow residue to easily flow through the unit. Inside the opener our full length seed tube gently guides the seed all the way to the bottom of the trench and a seed flap makes sure the seed stays in the trench. The trailing press wheels maintain proper opener depth, close the seed trench, and firm the seed into the soil. T-handles quickly adjust the press wheels and allow for small incremental changes in planting depth.



00 SERIES



Choice of 2x13 Single Press Wheels or 3x13 Center Rib Press Wheels

	3P600
Hitch	3-Pt., Cat. 1 & 2
Primary Design	Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	11 - 6" spacing, 9 - 7-1/2" spacing
HP Requirements (min)	40 HP
Weight - lbs (kg)	1,500* (680)
Working Width	6'
Width	6'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.



Color: 

Mounted Versatility.

3P606NT models are 3-point mounted no-till drills, allowing you to get close to field edges and with our proven ground drive no remote hydraulics are needed.

This is a heavy duty no-till drill loaded with features like 450 lbs. pre-loaded coulters, a calibration crank, ground driven metering system, rain tight seed box lids, and a double disk no-till opener. The rugged 6' seeder is ideal for limited space situations and maneuvering among trees and other obstacles. The lead coulters have 4" stagger to aid in residue flow and prepare a mini-seedbed for the 06 series openers to plant into.

All 3P606NT models come standard with a fluted feed box. Add a native grass box for seeding fluffy native grass mixes that include seeds like big and little bluestem and smooth brome. You can further increase your options by adding a small seeds box; a smaller version of our standard fluted feed box used for clover and alfalfa. Add both and seed 3 different types of seed and rates, all at the same time!



5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance



	3P606NT
Hitch	3-Pt, Cat. 2
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	9
HP Requirements (min)	60 HP
Weight - lbs (kg)	2,280* (1,034)
Working Width	6'
Width	6'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.
Native Grass Box	6 bu.

Color:



End Wheel Efficiency.

The 6' Pull-type No-Till Drill (606NT) features an end wheel design that reduces side-loading on openers when operated on contours and curves, eliminating premature opener wear.

With the optional native grass and small seeds box this machine is quite capable in pasture renovations and food plot seeding. Other features like heavy duty coulters, calibration crank, central grease bank, lock-out hubs for transport, and optional weight brackets create a system designed for long-term dependability and productivity in a broad range of seeding applications.

	606NT
Hitch	Pull-Type
Primary Design	End Wheel No-Till
Row Spacings	7-1/2"
Number of Openers	9
Tire Size	7.00-15LT
HP Requirements (min)	40 HP
Weight - lbs (kg)	2,700* (1,124)
Working Width	6'
Width	8'6"
Transport Length	11'5"
Transport Clearance	14"
Transport Height	5'1"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.
Native Grass Box	6 bu.



Color: 

06 SERIES



5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance



4-SPEED GEARBOXES - Provides increased accuracy and flexibility of the metering system by giving the operator more choices for drive speed.



WIDE SEED CUPS - Exclusive fluted seed cup delivers outstanding accuracy; delivering the rate you choose, evenly and gently.

	800
Hitch	Pull-Type
Primary Design	End Wheel Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	15 - 6" spacing, 12 - 7-1/2" spacing
Tire Size	700-15LT
HP Requirements (min)	45 HP
Weight - lbs (kg)	2,379* (1,079)
Working Width	7'6"
Width	9'8-1/2"
Transport Length	12'
Transport Clearance	9"
Transport Height	5'4"
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Main Box Capacity	16 bu.
Small Seed Box	2 bu.


Big Performance in a Small Package.

This 8' Min-Till Drill (800) uses the field proven 00 series opener to properly place seed. This rugged opener utilizes 13-1/2" 4mm thick disk blades, full length seed tube and an 18 position T-handle press wheel to precisely control seed depth. Changing the 5-position, centrally located opener down pressure adjustment is quick and easy, ensuring the correct down pressure regardless of the conditions.

Other features include a 1-3/4" fluted feed metering system. It utilizes a 4-speed gear box and adjustable gate opening to accurately set a wide variety of planting rates for crops from alfalfa to peas. You may also add a dry fertilizer and/or a small seeds attachment to tailor the drill to your needs.

Other features include a lock-out hub to free wheel the drive system during transport. Safety lighting, electronic acre meter, lift cylinder with hoses, calibration crank, "V" bottom dividers for easy clean out, and folding tongue are all standard equipment. An optional seed box agitator is available.

Color:



DIGITAL ACREMETERS -
LED readout of current acres on machine. Unique design conserves battery power.



SAFETY LIGHTS -
LED lights provide high visibility and safety during transport.



LOCK OUT HUBS -
Disengages all drive components for transport reducing wear and tear.

00 SERIES



Choice of 2x13 Single Press heels or 3x13 Center Rib Press Wheels



Narrow Transport.

Our double disk configuration and full length seed tube ensures that the seed is placed consistently at the depth chosen. Additional seed tubes are used to place both native grass and small seeds. This allows three seeds to be planted at separate rates at the same time. Depth control is handled by the 18 position T-handle press wheel adjustment.

The main seed box is a fluted feed design. The seeding rate is set with the four speed transmission and the adjustable gate opening. The optional native grass box uses our proven "picker wheel" to meter the seed. Rates are adjusted by varying the speed of the drive. Lastly, the optional small seeds attachment is a smaller version of our fluted feed system, and seeding rates are set by changing the width of the fluted feed. The ground drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.

Options also include: dry fertilizer, native grass, small seeds, seed box agitator, and dual seed.



	3P806NT
Hitch	Semi-Mount
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	13
Tire Size	265/70B 16.5
HP Requirements (min)	80 HP
Weight - lbs (kg)	4,350* (1,973)
Working Width	8'
Width	8'2"
Transport Length	12'1" w/lift assist
Transport Clearance	Varies by Tractor
Transport Height	7'8"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	16 bu.
Small Seed Box	1.92 bu.
Native Grass Box	8 bu.
Fertilizer	8 bu.
2nd Main Box	8 bu.

Color: 

*3P806NT Model Shown With
Optional Native Grass and
Small Seeds Boxes*



V-BOTTOM DIVIDERS - Allows seed to feed from seed box to feeder cup for complete emptying.



GREASE BANK - Installed on No-Till machines, so you can service all coulters in centralized locations.



5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance

	3P1006NT
Hitch	Semi-Mount
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	15
Tire Size	265/70B 16.5
HP Requirements (min)	100 HP
Weight - lbs (kg)	5,460* (2,476)
Working Width	10'
Width	9'8"
Transport Length	13'3" w/lift assist
Transport Clearance	Varies by Tractor
Transport Height	7'8"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	20 bu.
Small Seed Box	2.40 bu.
Native Grass Box	10 bu.
Fertilizer	10 bu.
2nd Main Box	10 bu.

Color:



3P1006NT Model Shown
With Optional Native Grass
and Small Seed Boxes



3 BOX 3 SEED 3 RATE
3 3 3

MULTIPLE BOX COMBINATIONS - Start with the standard 2 bu. per ft. main seed box, then add either a 2nd seed box for dual seed, a dry fertilizer box, or a native grass box. Additionally you can add a small seeds box to the main box or add it to the dual seed/fertilizer/native grass box choice.

10ft Narrow Semi-Mounted.

The 3P1006NT model is the big brother to the 8' - 3P806NT. At 10' seeding and 10' transport this machine is productive yet can easily get in pasture gates, over bridges, and transport down narrow roads. 2-point mounting and dual hydraulic lift assist wheels in the rear give the drill excellent ground clearance as well.

Non-swiveling coulters allow the 3P1006NT to stay on side hills without drifting. Competitive models use swiveling coulters that tend to run downhill. Two smaller pneumatic tires in front gauge depth for the coulters, as well as, drive the metering systems on the drill.

With the main seed box only the drill weighs 4350 lbs., so it has the weight needed to penetrate tough no-till surfaces. If even more weight is needed an optional weight bracket can be installed to get excellent penetration in the toughest ground.



06 SERIES

5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance



706NT & 1006NT NO-TILL COMPACT DRILLS

HP
55-75 Min.

HITCH
Pull-Type



NEW!

Land Pride's 706NT and 1006NT End Wheel No-Till Drills are ideal for seeding in a wide variety of applications from pasture renovation to utility reclamation or food plots to food production. They are a great combination between the productivity of a large drill and the versatility of a compact one.

Both models feature large end wheels designed for unmatched ground gauging in rugged terrain. In addition, the in-line end wheels minimize side loading on contours and hills, dramatically extending the life of the no-till openers. Our 706NT comes standard with a 17-bushel main seed box, the 1006NT is 25-bushel. You can also add a small seeds box and either a native grass box or a fertilizer box.

These drills also include a 6-position hitch that adjusts to your tractor's hitch height to keep the drill level in planting position. Furthermore, with its high clearance and end wheel design, the 706NT and 1006NT can go virtually anywhere your tractor can pull it, without gouging or bottoming out.

	706NT	1006NT
Horsepower	55 HP Minimum	75 HP Minimum
Hitch	Pull-Type, Pintle or Clevis	
Working Width	7'	10'
Width	9' 10"	12' 7"
Length	13' 10"	13' 10"
Height	6' 7"	6' 7"
Ground Clearance	13.5"	13.5"
Weight*	3,900 lbs	4,500 lbs
Seedbox Capacity - Main	17.5 bu.	25 bu.
Small Seeds Box	1.7 bu.	2.4 bu.
Native Grass Box	7 bu.	10 bu.
Fertilizer Box	6.5 cu./ft.	9.2 cu./ft.
Row Spacing	7.5"	7.5"
Number of Openers	10	15
Tires	9.00 x 24, 8-ply	9.00 x 24, 8-ply
Opener Travel	6.5"	6.5"
Opener Depth Range	0 - 3.5"	0 - 3.5"
Opener Down Pressure	90 - 180 lbs	90 - 180 lbs
Coulters	5/8" Turbo or 3/16" Fluted	5/8" Turbo or 3/16" Fluted
Acre Meter	Digital, Optional	




Color:





Easily disengage drive sprockets with Land Pride's patent-pending Lock-Out Clutch on all boxes.



Front rollers feature 1/2" x 2" spikes that break through thatch and crust to prep the soil for seeding.



Mud scrapers on the rear packer roller keep soil from compacting on roller in damp conditions.



The NTS uses exclusive Great Plains fluted seed cups to deliver outstanding metering accuracy.



Optional native grass box uses agitators to keep the seed flowing toward the picker wheel.

	NTS2507	NTS2509	NTS2511
Horsepower	3-Point: 70 HP Pull-Type: 60 HP	3-Point: 90 HP Pull-Type: 80 HP	3-Point: 110 HP Pull-Type: 100 HP
Hitch	3-Point, Cat II or Pull-Type with transport wheels		
Working Width	7'	9'	11'
Length 3-pt (Pull-type)	57" (133")		
Height	42"		
Weight 3-pt (Pull-type) lbs	1,878 (2,787)	2,165 (3,124)	2,674 (3,882)
Seedbox Capacity - Main	7.5 bu.	8.8 bu.	11.3 bu.
Small Seeds Box	1.7 bu.	2.0 bu.	2.6 bu.
Native Grass Box	8.5 bu.	9.8 bu.	12.7 bu.
Output	Varies by seed, Drop spread		
Front Rollers	8-5/8" Diameter, 1-1/4" Spindles with Greasable Ball Bearings		
Front Roller Angle	Up to 18 Degrees		
Front Roller Spikes	1/2" x 2", Heat-Treated Steel, Replaceable		
Rear Packer Roller	11-3/8" Diameter, Cast and Notched Gray Iron Rings		
Chains	#40 Series Chain		
Seed Cups - Main Box and Small Seed Box (each box)	12	14	18
Acremeter	Digital, Optional		



Color: 

The new NTS25 No-Till Seeder incorporates 30 years of experience in designing and manufacturing seeding equipment to deliver a durable, high-quality tool that will exceed your expectations. Whether employed to restore a pasture, reclaim a right-of-way, overseed a ball field, or plant a new yard, you know that Land Pride's NTS25 will deliver the results you've come to expect from a seeder leader.