




# PRODUCT GUIDE

Over 300 Products To Fit Your Lifestyle

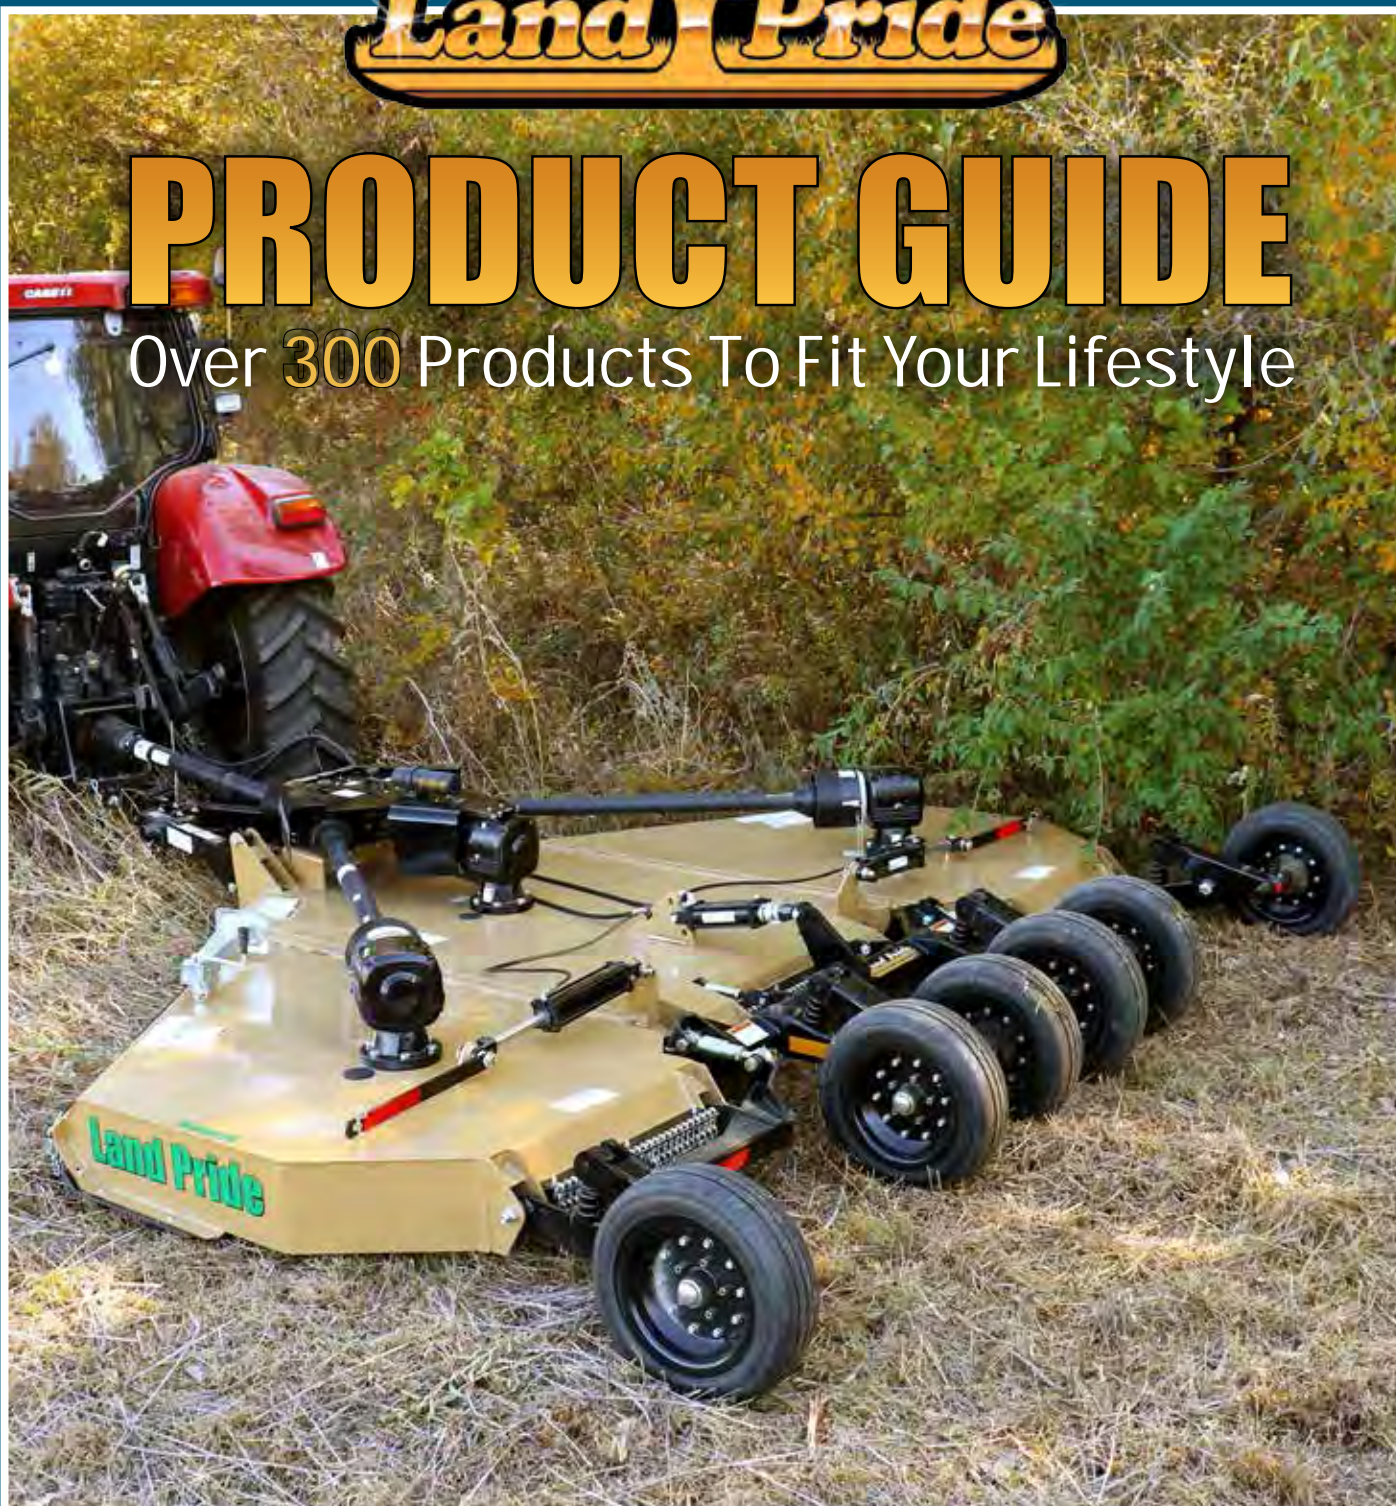

*Consistently Leading the Way...*



# Product Guide

## Products Page

### MOWERS

All-Flex Mowers .....	6
Flail Mowers .....	9
Grooming Mowers .....	3
Zero Turn Mowers .....	12

### CUTTERS..... 15

### TILLERS..... 43

### COMPACT DRILLS ..... 49

### SEEDERS

All-Purpose Seeders .....	58
Fertilizer Spreaders .....	61
Food Plot Seeders .....	64
No-Till Seeders .....	57
Overseeders .....	59
Primary Seeders .....	60
Seed Bed Rollers .....	63

### DIRTWORKING

Bale Spears .....	101
Box Scrapers .....	74
Core Aerators .....	81
Disc Harrows .....	83
Ditchers .....	85
Drag Harrows .....	63
Drag Scrapers .....	80
Field Cultivators .....	88
Grading Scrapers .....	79
Hydraulic Reservoir Systems .....	112
Landscape Rakes .....	71
Moldboard Plows .....	89
Pallet Forks .....	100
Pasture Aerators .....	90
Post Hole Diggers .....	91
Powered Rakes .....	95
Quick-Hitches .....	99
Rear Blades .....	65
Ripper Shanks .....	87
Scarifiers .....	73
Soil Pulverizers .....	96
Spike Tooth Harrows .....	97
Straw Crimper .....	82
Wood Chippers .....	98

### GRAPPLES..... 102

### SNOW TOOLS..... 108

## Quality products from Land Pride.

Land Pride, A Division of Great Plains Mfg., Inc., has been a leader in grounds maintenance equipment throughout North America since 1986. Today Land Pride is a leading U.S. manufacturer of tractor mounted implements including Rotary Tillers, Grooming Mowers, Seeders, Rotary Cutters, Rear Blades, Landscape Rakes, Post Hole Diggers, and Grapples.

At Land Pride, we have earned the reputation of standing behind our products. We know how important it is for you to feel confident in purchasing products that are reliable, and to know that our support is available when assistance is needed.

Many products are available in colors to match your tractor. See the legend next to the model throughout this catalog for color availability.

Color Options:



Land Pride Quick-Hitch Systems, available in a Tractor Mount Cat. 1 Sub-Compact, Cat. 1 and Cat. 2 Tractor 3-Point Hitch, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch System icon to denote applicable products.



Models may or may not include options. Design and specifications subject to change without notice. See dealer for complete warranty information.



## Designed for the homeowner.

Designed and built with homeowners in mind, the FDR16 is just right for subcompact and compact tractors. With our tapered rear discharge area, foreign objects are discharged closer to the ground, plus you can mow close to objects with either side of the mower. The floating lower clevises allow the mower to cut evenly over uneven terrain.



The driveline storage hook keeps the driveline off the ground when not in use.



Stressproof® is a Registered Trademark of Niagara Lasalle Corporation  
Kevlar® is a Registered Trademark of DuPont™

	FDR1648	FDR1660	FDR1672
Horsepower	15-30 HP		
Hitch	Cat. 1		
Working Width (cm)	48" (122)	60" (152)	72" (183)
Overall Width (cm)	51" (130)	63" (160)	75" (190)
Weight - lb (kg)	486 (220)	577 (262)	619 (281)
Mowing Height	3/4" - 3-1/4"	3/4" - 5-1/4"	
Deck Material Thickness	3/16"		
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 16-7/8"	1/4" x 2-1/2" x 21"	1/4" x 2-1/2" x 25"
Blade Overlap	1-1/4"		
Blade Spindles	Greaseable		
Blade Tip Speed	16,203 FPM	18,195 FPM	18,130 FPM
Castered Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire		
Castered Wheel Spindle	1" Diameter Stressproof® Material		
Drive Train	540 RPM B-Section V-Belt		
Driveline	Heavy-duty w/Quick Coupler		
Front Roller	Optional		

\*See dealer for complete warranty information.

Color Options:



60" & 72" Only

- Two position top hitch allows for various tractor lift capabilities
- Floating 3-point for ground following capabilities
- 1" Stressproof® wheel spindles with nylon bushings for smooth casting
- Single B-section belt with Kevlar®
- Grease bearings from top without removing belt covers
- Optional mulching blades available



## Built for tough jobs and long days.

Discharging grass out the rear of the mower leaves a clean cut. The FDR25 distributes grass evenly over a wide surface, and it doesn't discharge into unwanted areas.



Solid rubber tires on 72" model are sandwiched between the rim halves and bolted in.



Main drive cast iron pulley offers superior strength and belt slippage control.

Some tractor and tire combinations do not allow enough room for mower hook-up. Longer lower hitch clevises are available to easily correct this situation.



(std)

Blade spindles and bearings are precision fit in a cast iron housing.



	FDR2572	FDR2584
Horsepower	15-50	
Hitch	Cat. 1	
Working Width (cm)	72" (183)	84" (213)
Overall Width (cm)	74-7/8" (190)	86-1/2" (220)
Weight - lb (kg)	718 (326)	812 (368)
Mowing Height	3/4" - 5-1/4"	
Discharge	Rear	
Lower Hitch	Floating Clevis w/Plated Pins	
Top Link	Floating Clevis	
Deck Material Thickness	3/16"	
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 25"	5/16" x 2-1/2" x 29"
Blade Overlap	1-1/4"	
Blade Spindles	Greaseable	
Deck Spindle Housings	Cast Iron Greaseable Hubs	
Blade Tip Speed	18,130 FPM	17,210 FPM
Caster Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire	4" x 11" Semi-solid
Caster Wheel Spindle	1" Diameter Stressproof® Material	
Drive Train	540 RPM B-Section V-Belt	
Driveline	Heavy-duty w/Quick Coupler	
Front Roller	Optional	

\*See dealer for complete warranty information.

Color Options:



- Lower hitch clevises adjust in and out for greater leverage
- Floating 3-point for superior ground hugging capabilities
- 1" Stressproof® wheel spindles with nylon bushings for smooth casting
- Single B-section Kevlar® belt, spring-loaded for maximum performance
- Rounded front corner without lip helps protect trees and fences
- Grease bearings from top without removing belt covers



## Designed for heavy commercial use.

Our FDR3690 Rear Discharge Grooming Mower is pure muscle! Its 90" width can swallow a lot of grass in one bite. The rear discharge area directs debris toward the ground and the free-swinging blades rotate at 16,500 fpm. The tapered deck allows users to get close to trees or other obstacles and the medium lift blade produce a finely groomed lawn every time.



The FDR36 frame-over-deck design is engineered for maximum airflow, featuring a roll-formed 1/4" leading edge, 6 free-swinging blades and a tapered and sloped rear deflector.

	FDR3690
Horsepower	30-60 HP
Hitch	Cat. 1
Working Width	90" (229)
Overall Width (cm)	92" (234)
Weight - lb (kg)	930 (422) (w/o Front Roller)
Mowing Height	1" - 6-1/2" in 1/4" Increments w/Plated Spacers
Discharge	Rear
Lower Hitch	Floating Clevis w/Plated Pins
Top Link	Floating Clevis
Deck Material Thickness	3/16"
Blades 6 ea.	Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per blade spindle)
Blade Overlap	2"
Blade Tip Speed	16,500 FPM
Blade Spindles	1-3/8" Stressproof® Shaft
Deck Spindle Housings	Cast Iron Greasable Hubs
Drive Train	540 rpm Double V Powerband Belt
Belt Take-up	Spring Loader Idler
Gearbox	540 rpm, Cast Iron Housing with Beveled Gears
Caster Gauge Wheels	5" x 13" Semi-Solid Tire with Bearings
Caster Wheel Spindle	1-1/4" Diameter with Greasable Bushing
Driveline	Heavy-Duty Cat. 4 w/Quick Coupler
Front Roller	Optional


\*See dealer for complete warranty information.

Color Options:



- Floating 3-point
- Clevis hitches for easy one person hook-up
- 3/16" Deck material
- 6 Free swinging blades
- 13" Semi-solid tires with bearings
- Spring loaded idler
- Cast iron pulleys
- Grease bearings from top without removing belt covers



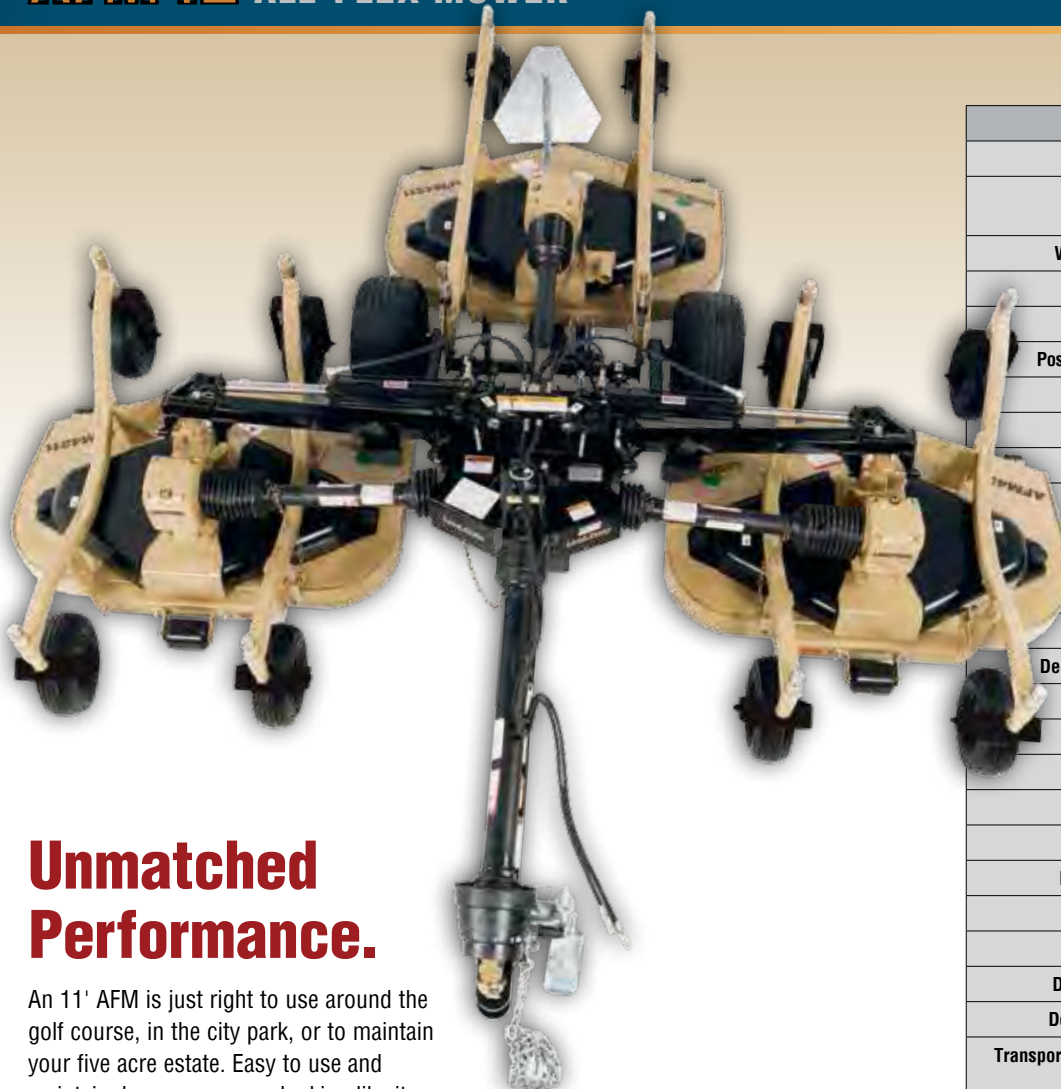

## Unmatched Performance.

An 11' AFM is just right to use around the golf course, in the city park, or to maintain your five acre estate. Easy to use and maintain, keep your grass looking like it was cut with a walk-behind, but with a lot less time invested!

- Automatic wing locks for transport
- Zero turning radius due to sleek frame design
- Rear discharge for even dispersal
- Easy to grease from top blade spindles



Dispensing cut grass is a key ingredient to maintaining healthy turf. The more evenly and completely the cut grass is dispersed, the quicker it works its way towards the soil for decomposition.

	AFM4211
Horsepower	30-65 HP
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain
Working Width (cm)	11'1" (338)
Overall Width	11'3-1/2"
Transport Width	7'8"
Positive Tongue Wt - lb	450
Weight - lb (kg)	2040 (918)
Cutting Height	1" - 5-1/2" in 1/4" incr.
Wing Cylinders	2-1/2" x 12"
Rear Deck Cylinder Gearbox	2" x 8" 540 RPM, 1 Splitter, 3 Wing
Decks: 3 each	48"
Deck Thickness	3/16"
Deck Overlap	6"
Deck Spindle Housing	Cast Iron Greaseable Hubs
Blade Size	1/4" x 2-1/2" x 16-7/8"
Blade Overlap	1-3/16"
Blade Tip Speed	16,020 fpm (182 mph)
Blade Bearings	Greaseable Ball Bearings
Blade Spindles	1-3/8" Stressproof® Shaft
Blade Spindle RPM	3,628 RPM
Drive Train	540 RPM B-section V Belt
Discharge	Rear
Deck Tires - 10 total	13 x 5 Air Tire, Sealant
Deck Wheel Spindles	1-1/4" w/Nylon Bushings
Transport Tires and Bearing	18 x 9.5, Sealant and Tapered Bearings
Anti-Scalp Roller	Front Center and Outside Deck Corners
Input Driveline	Cat. 3 CV w/Slip-Clutch
Deck Driveline	Cat. 3
Mowing capacity @2mph	2.68 Acres/hr
@4mph	5.37 Acres/hr
@6mph	8.1 Acres/hr
Flex-Wings	23° L-R, 22° F-B
Flex Center	13° F-B

\*See dealer for complete warranty information.

Color Options:





## Get the results you deserve!

The AFM is perfect for golf course maintenance, large estates, city recreation areas and sports fields. Sleek enough to get under trees and agile enough to turn on a dime, the AFM Series is just right for all around maintenance. And the quality of cut is the best feature of all.



- Wings automatically lock for safe transport, release with pull rope or optional hydraulics
- Single B-section belt per deck with spring-loaded belt tensioner
- Rear discharge without chains. Chains collect moist grass and drop it in unsightly clumps
- Wing decks discharge clippings away from the rear deck
- Wing deck rear wheels are non-castering; helps hold mower on slopes
- Single beam hitch and generous deck overlap virtually eliminate skipping in "zero-turn" situations



Anti-scalp rollers on nose and trailing edges of decks protect the deck as well as the turf.



Low deck pivot allows for greater side to side flotation on the wing decks.



Over center release easily takes tension off the drive belts during extended off time, or for belt replacement.



Optional Hydraulic Wing Unlock allows user to unlock the wings from the tractor seat.

	AFM4214	AFM4216
<b>Horsepower</b>	40-70 HP	
<b>Hitch</b>	Pull-Type, Adjustable Clevis & Safety Tow Chain	
<b>Working Width (cm)</b>	14' (427)	16' 8" (508)
<b>Overall Width</b>	14' 3"	16' 10"
<b>Transport Width</b>	6' 8"	8' 10"
<b>Positive Tongue Wt - lb</b>	540	580
<b>Weight - lb (kg)</b> (w/15" tires)	3000 (1361)	3315 (1504)
<b>Cutting Height</b>	3/4" - 5-1/4" in 1/4" incr.	
<b>Wing Cylinders</b>	2-1/2" x 12"	
<b>Rear Deck Cylinder</b>	2-1/2" x 8"	
<b>Gearbox</b>	540 RPM, 3 Wing, 1 Splitter	
<b>Decks: 3 each</b>	60"	72"
<b>Deck Thickness</b>	3/16"	
<b>Deck Overlap</b>	6"	8"
<b>Deck Spindle Housing</b>	Cast Iron Greaseable Hubs	
<b>Blade Size</b>	5/16" x 2-1/2" x 20-29/32"	5/16" x 2-1/2" x 25"
<b>Blade Overlap</b>	1-1/4"	
<b>Blade Tip Speed</b>	18,396 fpm	18,340 fpm
<b>Blade Bearings</b>	Greaseable Ball Bearings	
<b>Blade Spindles</b>	1-3/8" Stressproof® Shaft	
<b>Blade Spindle RPM</b>	3,362 RPM	2,802 RPM
<b>Drive Train</b>	540 RPM B-section V Belt	
<b>Discharge</b>	Rear	
<b>Deck Tires - 10 total</b>	15 x 6.6 Air Tire, Sealant or 18 x 9.5 Air Tire, Sealant	
<b>Deck Wheel Spindles</b>	1-1/4" w/Nylon Bushings	
<b>Transport Tires and Bearing</b>	23 x 10.5, Sealant Tapered Bearings	
<b>Anti-Scalp Roller</b>	Front Center and Outside Deck Corners	
<b>Input Driveline</b>	Cat. 4 CV w/Slip-Clutch	
<b>Deck Driveline</b>	Cat. 3	
<b>Mowing capacity @2mph</b>	3.39 Acres/hr	4.0 Acres/hr
<b>@4mph</b>	6.78 Acres/hr	8.1 Acres/hr
<b>@6mph</b>	10.17 Acres/hr	12.1 Acres/hr
<b>Flex-Wings</b>	23° L-R, 22° F-B	
<b>Flex Center</b>	10° L-R, 22° F-B	

\*See dealer for complete warranty information.

Color Options:

**5 YEAR**  
Limited Gearbox  
Warranty



## Wide open spaces...

Our 22' All-Flex Mower is ideal for those wide open spaces. Cutting a 22' swath takes a bite out of any workload, while leaving behind a professionally performed finish.



The commercial duty 1-5/8" blade spindle features a cast iron housing, additional steel plate support, a 3/4" thick blade support bar and a remote greasing line.



Transport width of 9'6" allows for safe transport from site to site.

	AFM4522
<b>Horsepower</b>	65-100 HP
<b>Hitch</b>	Pull-Type, Adjustable Clevis & Safety Tow Chain
<b>Working Width (cm)</b>	21' 9" (663)
<b>Overall Width</b>	22'
<b>Transport Width</b>	9' 6"
<b>Positive Tongue Wt - lb</b>	740
<b>Weight - lb (kg)</b>	4150 (1886)
<b>Cutting Height</b>	3/4" - 5-1/4" in 1/4" incr.
<b>Wing Cylinders</b>	3-1/2" x 12"
<b>Rear Deck Cylinder</b>	2-1/2" x 8"
<b>Gearbox</b>	540 RPM, 3 Wing, 1 Splitter
<b>Decks: 3 each</b>	90"
<b>Deck Thickness</b>	3/16"
<b>Deck Overlap</b>	4-1/2"
<b>Blade Hub</b>	5 Bolt Casting
<b>Blade Size</b>	5/16" x 2-1/2" x 31-17/32"
<b>Blade Overlap</b>	2-1/4"
<b>Blade Tip Speed</b>	18,498 fpm
<b>Blade Bearings</b>	Greaseable Ball Bearings
<b>Blade Spindles</b>	1-5/8" Stressproof® Shaft
<b>Blade Spindle RPM</b>	2,241 RPM
<b>Blade Drive Belt</b>	1 C-section
<b>Discharge</b>	Rear
<b>Deck Tires - 10 total</b>	18 x 9.5 Air Tire, Sealant
<b>Deck Wheel Spindles</b>	1-1/4" w/Nylon Bushings
<b>Transport Tires and Bearing</b>	P27560SR Tapered Bearings
<b>Anti-Scalp Roller</b>	Front Center of Each Deck
<b>Input Driveline</b>	Cat. 4 CV w/Slip-Clutch
<b>Deck Driveline</b>	Cat. 3
<b>Mowing capacity @2mph</b>	5.27 Acres/hr
<b>@4mph</b>	10.54 Acres/hr
<b>@6mph</b>	15.82 Acres/hr
<b>Flex-Wings</b>	23° L-R, 22° F-B
<b>Flex Center</b>	10° L-R, 22° F-B

\*See dealer for complete warranty information.



- Anti-scalp rollers on each deck reduces turf damage
- 18" Deck tires with sealant mean fewer pounds per square inch
- Single C-section belt per deck with spring-loaded belt tensioner
- Single beam tongue for zero turning radius
- Rear discharge decks for even dispersal
- Adjustable clevis hitch to fit various draw bar heights



## Fast, clean and dependable mowing.

Land Pride Flail Mowers are the perfect choice for schools and other recreational areas where people may be present. With the rotor working in the opposite direction of travel, the cut grass is brought up and over the rotor. Most clippings are laid down prior to the mower passing by, which means foreign objects also have a tendency to stay inside the mower and are less likely to be discharged.

The 21 Series Flail Mower offers a two position hitch for offsetting the mower, enabling closer cutting along buildings, fences, or roadsides.



Tapered ends on rear roller prevent gouging during tight turns.

	FM2160	FM2172
<b>Horsepower</b>	25-55 HP	
<b>Hitch</b>	Cat. 1	
<b>Working Width (cm)</b>	60" (152)	72" (183)
<b>Weight - lb (kg)</b>	695 (315)	772 (350)
<b>Cutting Height</b>	3/4" - 4"	
<b>Cutting Capacity</b>	1"	
<b>Offset Hitch</b>	6-1/4" Right, Centered	
<b>Deck Thickness</b>	11 Gauge	
<b>Knives</b>	Duck-foot Type	
<b>Rotor Diameter</b>	5"	
<b>Rotor Rotation</b>	Reverse	
<b>Belt Type</b>	3 'B' Section	
<b>Gearbox RPM</b>	540 w/Over-Running Clutch	
<b>Driveline</b>	Cat. 4	

Color: 

- Rear height adjusting roller with greaseable bearings
- Scraper on rear height adjusting roller
- 2 Position hitch for offsetting, enabling closer cutting along buildings, fences, or roadsides
- Adjustable skid shoes
- Duckfoot style blade for grooming
- Rear door access for ease of changing blades



Free-swinging duckfoot style blade is capable of providing a groomed appearance as well as cutting material up to 1" thick.



## Perfect for schools and recreational areas.

The perfect model for mowing around schools and municipalities, the 31 Series has a mostly enclosed structure to keep the cut grass and other debris within the cutting chamber.


	FM3188
Horsepower	35-80 HP
Hitch	Cat. 1 & 2
Working Width (cm)	88" (224)
Weight - lb (kg)	1,300 (590)
Cutting Height	1/2" - 6"
Cutting Capacity	1"
Offset Hitch	7-3/4" Left & Right, Screw Type
Deck Thickness	3/16"
Knives	Fine Cut
No. of Knives	48
Rotor Diameter	5-1/2"
Rotor Rotation	Reverse
Belt Type	3 'B' Section
Gearbox RPM	540 w/Over-Running Clutch
Driveline	Cat. 4

Color: 

- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns
- Scraper on rear height adjusting roller
- Fenders on both ends to protect trees
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop
- Easy to adjust screw-type offset hitch

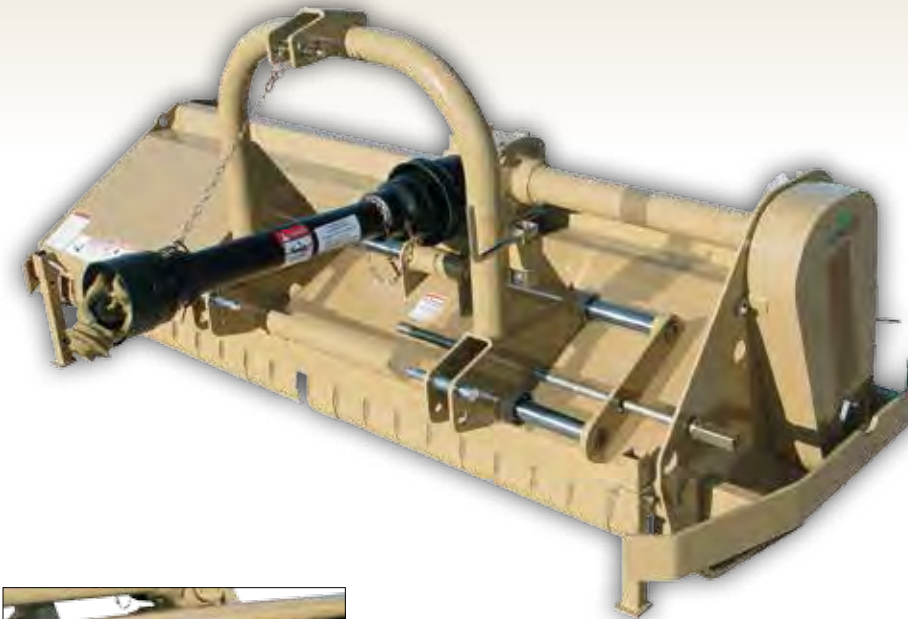

The two blade system results in a fine cut.

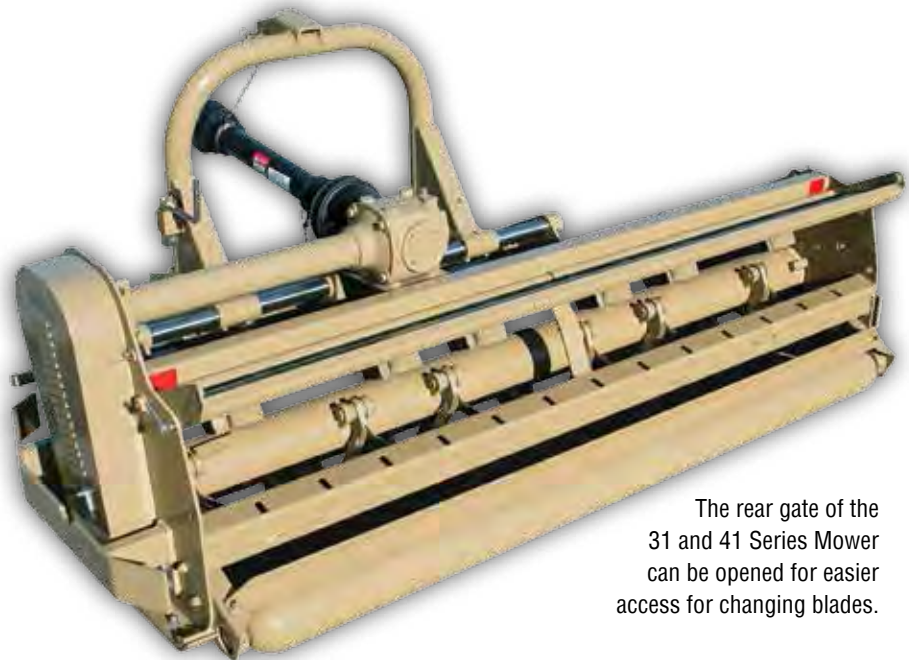

The rear gate of the 31 and 41 Series Mower can be opened for easier access for changing blades.



## Tough machine offering fine results.

The 41 Series offers 3/16" deck material and utilizes a threaded rod to easily offset the hitch by nearly 8". The gearbox incorporates an over-running clutch that enables the rotor to swing free to a stop when the tractor PTO has been turned off. The 41 Series also offers cast and machined hammers and brush rake teeth.



	FM4188
Horsepower	35-80 HP
Hitch	Cat. 1 & 2
Working Width (cm)	88" (224)
Weight - lb (kg)	1,323 (600)
Cutting Height	1/2" - 6"
Cutting Capacity	2"
Offset Hitch	7-3/4" Left & Right, Screw Type
Deck Thickness	3/16"
Knives	Hammers
No. of Knives	24
Brush Rake Teeth	13 Each
Rotor Diameter	5-1/2"
Rotor Rotation	Reverse
Belt Type	3 'B' Section
Gearbox RPM	540 w/Over-Running Clutch
Driveline	Cat. 4

Color:

- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns
- Scraper on rear height adjusting roller
- Hinged rear gate allows opening for easy access to hammers
- Fenders on both ends to protect trees
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop
- 13 Adjustable brush rake teeth keep prunings in the blade path for maximum mulching



The baffles on the top inside of the deck keep the cut material from clumping together.



The 41 Series features 24 cast and machined hammers to shred prunings and to provide a nice clean cut in grass.



## Perfect Cut...

The ZST is just the right size with features that treat a homeowner to durability, efficiency, and a great manicured lawn!



The ZST Series residential class mowers are compact in size and ideal for homeowner grass maintenance.



Adjustable seat and steering levers allow for various positions to meet varying size requirements.

	ZST40	ZST48
Cutting Width	40"	48"
Cutting Height	1" to 4-1/2" in 1/2" Increments	
Engine	15 HP Kawasaki	18 HP Kawasaki
Deck Thickness	11 Gauge w/11 ga. Doubler Plate	
Steering	Twin Lever	
Anti-Scalp Rollers	1	2
Blades	Heat Treated, Medium Lift, Fusion® edge, 2 on 40", 3 on 48"	
Blade Spindles	Single V-Belt	
Tires	1-3/8" Cast Iron Housing, Greaseable Ball Bearings Optional Mulching Blades	
Fuel Capacity	3 U.S. Gallons	
Pump Drive	Belt Drive	
Parking Brake	Manually Activated	
Ground Speed	Forward 0-6 mph; Reverse 0-4 mph	
Bagging Options	Available	
Rear Bumper	Extended Height Bumper - Optional	

\*See dealer for complete warranty information.



Shown with extended height bumper.

- Square tubing welded frame design provides increased durability.
- Easy clean-out deck top allows air and debris to move across for improved belt cooling.
- Anti-scalp rollers keep scalping to a minimum.
- Floating deck design provides excellent flotation over uneven terrain.
- Accessible blade spindle zerks make greasing easy.
- Lever activated park brake.



## A Close Cut Everytime.



The ZSR Super Razor is designed for those small acreage homeowners or smaller contractors who want just a little more! The ZSR offers a wider deck choice, larger rear tires, a floating front axle and "commercial" quality gears.

	ZSR54	ZSR60
Cutting Width	54"	60"
Cutting Height	1-1/2" - 4-1/2" in 1/4" Increments	
Engine	23 HP & 23.5 HP Kawasaki	
Deck Thickness	10 Gauge Decks w/11 ga. Doubler Plate & 3/16" Reinforcement Plate Connecting Spindle Housing Mounts	
Steering	Twin Lever	
Anti-Scalp Rollers	4	
Blades	Heat Treated, High Lift, Fusion Technology	
Pivoting Front Axle	Locked or Unlocked	
Blade Belt	Single V-Belt	
Blade Spindles	1-3/8" Spindle, Cast Iron Housing, Greaseable Ball Bearings	
Tires	Front: 13 x 5 - 6, Rib Tread; Rear: 20 x 10 - 10, Turf Tread	
Fuel Capacity	12 U.S. Gallons	
Cooling	Air Cooled	
Pump Drive	V-Belt from Engine Crankshaft	
Parking Brake	Manually Activated, Pawl Over Cog Wheel	
Ground Speed	Forward 0-7.2 mph; Reverse 0-4.5 mph	
Seat	Deluxe Cushion Seat w/Springs, Armrests	
Certified ROPS	Standard	

\*See dealer for complete warranty information.

Color: 



Front edge of deck is reinforced with a heavy underside box section.



## Productivity Defined.

The AccuZ® ZT3 Series Zero Turn Mower is Land Pride's premier commercial-duty mower. The ZT3 is an excellent turf-care choice for ranchers, large estate owners, municipalities, campuses, and other landscape contractors. With a host of standard features, productivity comes naturally. The ZT3 60" deck meets the needs of customers who need to mow in tight areas, around obstacles, or want to maintain a lower cutting height over undulating terrain. The more productive 72"

ZT3 will meet the needs of customers with mostly level, open areas who want to get their mowing job done faster.



- Lockable floating front axle
- Standard remote commercial air filter
- Superior deck design with reinforced front edge
- Deluxe seat with springs
- Certified ROPS for added operator protection



Rear bumper tow hook

	ZT360	ZT372
Working Width (cm)	60" (152)	72" (183)
Cutting Height	1"-5" in 1/4" Increments	
Engine	Air Cooled, Commercial Filter 27 HP Kawasaki	
Deck Thickness	3/16" Decks & 1/4" reinforcement plate connecting spindle housing mounts	
Steering	Twin Lever	
Anti-Scalp Rollers	4	
Blades	Heat Treated, High Lift with Fusion® Edge Technology	
Front Fork Suspension	Tele-Caster®	
Pivoting Front Axle	Locked or Unlocked	
Blade Belt	Single V-Belt	
Blade Spindles	1-3/8" Stressproof® Shaft, Cast Iron Housing, Greaseable Ball Bearings	
Tires	Front: 13 x 6.50 - 6, Rib Tread; Rear: 24 x 12.00 - 12, Turf Tread	
Fuel Capacity	12 U.S. Gallons	
Drive System	Integrated Transmission	
Parking Brake	Internal Wet Disk, Manually Activated	
Ground Speed	Forward 0-12 mph; Reverse 0-6 mph	
Seat	Deluxe seat w/suspension springs, seat belt	
Optional Seat	Molded vinyl with comfort suspension adjustment	
Certified ROPS	Standard	

\*See dealer for complete warranty information.




### Tele-Caster® Front Fork Suspension

We know that a smooth looking lawn doesn't necessarily mean a smooth feeling lawn. We've taken comfort one step further with our patented Tele-Caster® Front Fork Suspension. This standard feature allows the wheel forks to absorb the rough terrain, allowing the deck to continue to cut even, and gives you a more comfortable ride. This translates into less fatigue, and puts you in a better frame of mind when the job is done! (Patent No. 8,167,324)





**Ideal for clearing grass,  
weeds & light brush.**

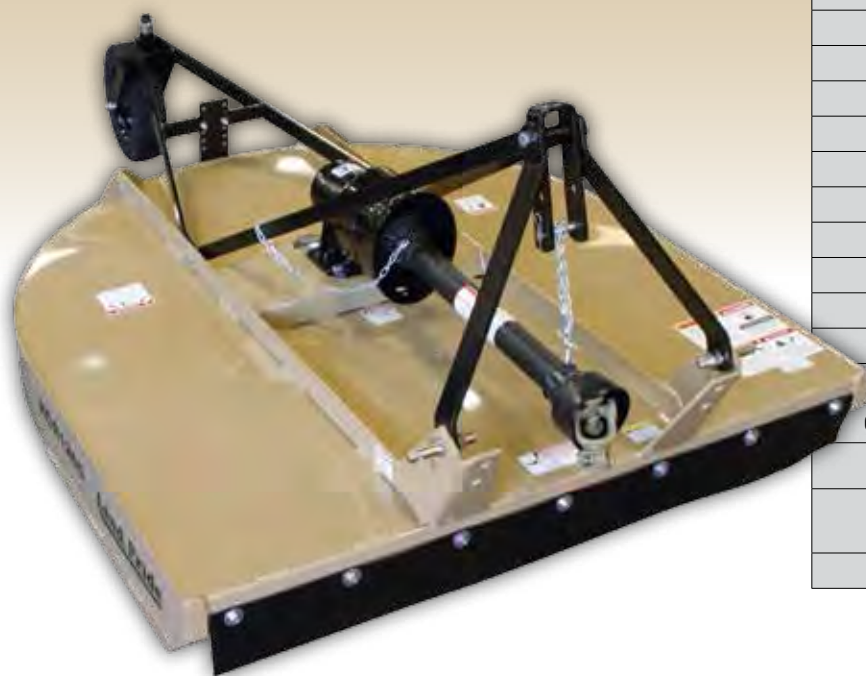

	RCR1248	RCR1260	RCR1272
Horsepower	20-60 HP		
Hitch	Cat. 1 & Cat. 1 Limited		
Working Width (cm)	48" (122)	60" (152)	72" (183)
Overall Width	53-5/8"	64-1/4"	76-1/2"
Overall Length	89-1/8"	103-3/8"	114-1/2"
Weight - lb (kg)	400 (181)	478 (217)	564 (256)
Cutting Height	1-1/4" - 10"		
Cutting Capacity	1" Diameter		
Deck Thickness	12 Gauge		10 Gauge
Deck Height	7-1/4"		
Safety Guards	Front and Rear Rubber Guards		
Skids	1/4" x 2" Weld on		
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades		
Blade Tip Speed	13,256 fpm	16,536 fpm	15,033 fpm
Dishpan	Round 10 Ga. x 24" Diameter, Dish Shaped		
Gearbox Rating^	60 HP		
Gearbox	540 RPM, PTO Driven Gearbox, Cast Iron Housing		
Driveline	ASAE Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate, Slip Clutch		
Tailwheel	15" Laminated Tire w/Cast Iron Hub		

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck to side skirt
- Dishpan with dual blades
- 360° Degree swivelling tailwheel
- Optional bolt on skid shoes for 60" & 72"



### In the City or the Country

Economically priced rotary cutter for daily use in small lots and country sides, capable of cutting 1" diameter material.



## Efficient handling and dispersing of material.



2"  
CUTTING  
CAPACITY

2"



	RCR1542	RCR1548
Horsepower	20-60 HP	
Hitch	Cat. 1 & Cat. 1 Limited	
Working Width (cm)	42" (107)	45-1/2" (116)
Overall Width	47-1/2"	53-1/2"
Overall Length	85-1/4"	91-3/4"
Weight - lb (kg)	402 (182)	424 (192)
Cutting Height	1-3/4" - 11-1/2"	
Cutting Capacity	2" Diameter	
Deck Thickness	12 Gauge	
Deck Height	7-1/4"	
Safety Guards	Rubber Front and Rear	
Skids	1/4" x 2" Weld on	
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	11,459 fpm	13,090 fpm
Dishpan	Round 10 Ga. x 24" Dia., Dish Shaped	
Gearbox Rating^	65 HP	
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing	
Driveline	ASAE Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch	
Tailwheel	4" x 16" Molded Rubber Tire	

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:



- Floating 3-point allows deck to hug the terrain
- 2 Position top link for greater lifting leverage on small tractors
- Shearpin or slip-clutch driveline
- High blade tip speed
- Driveline storage hook
- Fully welded deck adds additional strength



**Ideal for cleaning around the farm, the pond, or empty lots in the city.**



RCR18 & RCF20 feature a 10 Gauge dishpan with 1" thick blade bar that slides over stumps, rocks and debris.



	RCR1860	RCR1872	RCR1884
Horsepower	20-65 HP		45-90 HP
Hitch	Cat. 1		
Working Width (cm)	57" (145)	69" (173)	84" (213)
Overall Width	65"	77"	89"
Overall Length	99-3/8"	110"	135"
Weight - lb (kg)	599 (272)	737 (334)	851 (386)
Cutting Height	1-1/2" - 13"	1-1/2" - 11-1/2"	2" - 11"
Cutting Capacity	2" Diameter		
Deck Thickness	10 Gauge		
Deck Height	7-1/2"	9"	9-1/8"
Safety Guards	Rubber or Chain, Rear Metal Band - Standard		
Skids	1/4" x 2" Weld on		
Blades	Heat Treated Alloy Steel Free Swinging Blades		
	1/2" x 3"		1/2" x 4"
Blade Tip Speed	16,363 fpm	14,853 fpm	17,113 fpm
Dishpan	Round 10 Ga. x 24" Dia., Dish Shaped		Oval 10 Ga., Dish Shaped
Gearbox Rating^	65 HP		130 HP
Gearbox	540 RPM, PTO Driven Gearbox		
Driveline	Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch		
	ASAE Cat. 3		ASAE Cat. 4
Tailwheel	4" x 16" Solid Rubber Tire, Cast Iron Hub		4" x 8" x 15" Laminated Tire or Dual Laminated Optional, Cast Iron Hub

\*See dealer for complete warranty information.

^Based on field performance.

60 & 72

Color Options:

84

Color Options:



- Floating 3-point allows deck to hug the terrain
- Fully welded deck adds additional strength
- High blade tip speed ensures clean cut
- Single or dual tailwheel on 84"
- Heavy-duty tailwheel spindle
- All-welded formed channels front to rear add superior strength
- Lower clevises for easy hookup



## The Perfect Cutter for Rural Grass Maintenance - in a Smooth Top Design.

- Smooth top for easier cleaning
- Cast floating top link for following ground undulations
- ASAE Category 3 driveline
- Fully welded deck
- Available rubber or chain guards - front and rear
- High blade tip speed
- 84" Features single or dual tailwheel option

2"  
CUTTING  
CAPACITY

← 2" →

	RCF2060	RCF2072	RCF2084
<b>Horsepower</b>	20-65 HP		45-90 HP
<b>Hitch</b>	Cat. 1 - Floating Top Link		Cat. 1 & 2 Floating Top Link
	Clevis Type Lower Links, Quick Hitch Adaptable		
<b>Working Width (cm)</b>	60 (152)	72 (183)	84 (213)
<b>Weight - lb (kg)</b>	620 (281)	745 (338)	Sgl tailwheel: 1,047 (475) Dual tailwheel: 1,155 (524)
<b>Cutting Height</b>	1-1/2" - 12"		
<b>Cutting Capacity</b>	2"		
<b>Deck</b>	All Welded		
<b>Deck Thickness</b>	10 Gauge		
<b>Deck Height</b>	9-11/16"	11"	11-15/16"
<b>Safety Guards</b>	Rear Metal Banding - Standard		
<b>Optional Guarding</b>	Front: Rubber or Chain Rear: Rubber or Chain		
<b>Skids</b>	Weld-on (Bolt on Accessory Skid Shoes Available)		
<b>Blades</b>	2 ea. (1/2" x 3" Heat Treated) Free Swinging High-Lift		2 ea. (1/2" x 4" Heat Treated) Free Swinging High-Lift
<b>Blade Bolt</b>	Keyed w/Hardened Flat Washer & Lock Nut		
<b>Blade Speed</b>	16,363 fpm	14,955 fpm	17,113 fpm
<b>Dishpan</b>	Round, 10 Ga. x 24" Dia., Dish Shaped		Oval, 3/16" x 27"
<b>Gearbox Rating^</b>	65 HP		130 HP
<b>Gearbox</b>	540 RPM, Beveled Gears, Cast Iron Housing		
<b>Driveline</b>	ASAE Cat. 3; Shear Bolt or 2-Plate Slip-Clutch		ASAE Cat. 4; 2-Plate Slip-Clutch
<b>Tailwheels</b>	4" x 15" Laminated Tire or 4" x 16" Molded Rubber - 360 Degree Swivel		Single or Dual 4" x 15" Laminated Tire w/ Cast Iron Hub - 360 Degree Swivel

\*See dealer for complete warranty information.

^Based on field performance.

60 & 72

Color Options:



84

Color Options:





## Roundback design allows for more efficient handling and dispersing of material.

Land Pride's 26 Series Rotary Cutters are the perfect fit for around the farm clean-up or keeping the horse pasture under control. The 3" cutting capacity also allows it to be the choice of many municipalities from parks to easement control applications.

The floating top link allows the cutter to follow uneven terrain. The beefy lower hitch clevises allow easy hook-up to the tractor, as well as adding another degree of strength to the overall hitch area.

Take a close look at our welding, and the precise fit-up of all the fabricated parts and you'll understand the perfection we expect out of our manufacturing facilities. Our cast iron gearbox has internal components crafted to a precision fit; teeth and gears that mesh together perfectly for a quiet and efficient power source.



	RCR2660	RCR2672	RCR2684
<b>Horsepower</b>	35-130 HP		60-130 HP
<b>Hitch</b>	Cat. 1 & 2		Cat. 2 & 3
<b>Working Width (cm)</b>	60" (154)	72" (183)	84" (213)
<b>Overall Width</b>	67"	79"	90-3/4"
<b>Overall Length</b>	114"	126"	Single 133", Dual 116"
<b>Weight - lb (kg)</b>	1002 (454)	1046 (474)	1370 (621) Single ga. whl 1500 (680) Dual ga. whl
<b>Deck Thickness</b>	10 Gauge		
<b>Cutting Height</b>	2"-12"		
<b>Cutting Capacity</b>	3" Diameter		
<b>Safety Guards</b>	Front: Chain; Rear: Single or Double Chain		
<b>Skids</b>	Full Length Weld & Replaceable Shoes		
<b>Deck Height</b>	9-1/8"		10-1/8"
<b>Blades</b>	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades		
<b>Blade Tip Speed</b>	12,384 fpm	14,861 fpm	14,369 fpm
<b>Dishpan</b>	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
<b>Gearbox Rating<sup>^</sup></b>	130 HP		
<b>Gearbox</b>	540 RPM PTO Driven, 1-3/8" 6 Spline Cast Iron Housing		
<b>Driveline</b>	ASAE Cat. 4 4-Plate Slip Clutch		
<b>Tailwheel</b>	4" x 8" x 15" Laminated Tire Cast Iron Hub		

\*See dealer for complete warranty information.

<sup>^</sup> Based on field performance.

Color Options:

- Replaceable skid shoes
- Clevis hitch for easy hook-up
- Full length skids with replaceable shoes
- Rugged laminated tailwheel
- Fully welded deck
- 3-Point with dual 15" tailwheels on 84"



RCR26 & RCF27 Rotary Cutters feature a 3/16" dishpan with 1" x 4" blade bar that provides superior strength when encountering objects in the blade path. Round on 60" & 72"; oval on 84".



## Roundback with a Smooth Top.

The RCF27 Series Rotary Cutter is a smooth top version of our RCR26 Series, offering the same great cut and ideal for grass, weeds, crops, brush and small trees up to 3 inches in diameter. These units come equipped standard with a 3/16" thick heavy-duty stump jumper and replaceable bolt-on skid shoes. Optional shields are available for the front and rear.



3"  
CUTTING  
CAPACITY

← 3" →



	RCF2760	RCF2772	RCF2784
Horsepower	35-130 HP		60-130 HP
Hitch	Cat. 1 & 2		Cat. 2 & 3, Pull-Type
Working Width	60" (152)	72 (183)	84 (213)
Weight - lb (kg)	955 (433)	1072 (486)	1354 (614), Pull-Type: 1632 (740)
Cutting Height	1-1/2" - 12"		
Cutting Capacity	3"		
Deck	All Welded, Smooth Top		
Deck Thickness	10 Gauge		
Deck Height	11-1/4"		10-1/8"
Side Thickness	1/4"		
Safety Guards	Front: Chain or Rubber, Rear: Chain		
Skids	Replaceable		
Blades	Free Swinging High Suction, 1/2" x 4" - Heat Treated		
Blade Bolt	Keyed with Hardened, Flat Washer & Lock Nut		
Blade Tip Speed	12,384 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
Gearbox Rating^	130 HP		
Gearbox	540 RPM 1-3/8" - 6 Spline		
Gearbox Output Shaft	2"		
Driveline	ASAE Cat. 4 with 4 Plate Slip-Clutch		
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings		

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:    



- Replaceable skid shoes
- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model, Standard on Pull-Type



## Our RCF36 Series Rotary Cutter is a Brute!

This cutter is capable of cutting heavy grass and weeds, row crop stubble, thick brush, and small trees up to 4" in diameter.



	RCF3660	RCF3672	RCF3684
<b>Horsepower</b>	50-190 HP	60-190 HP	Lift: 70-190 HP Pull: 50-190 HP
<b>Hitch</b>	Cat. 1 & 2		Cat. 2 & 3, Pull-Type
<b>Working Width (cm)</b>	60" (152)	72" (183)	84" (213)
<b>Overall Width</b>	66-1/2"	78-1/2"	90-1/2"
<b>Overall Length</b>	112-1/2"	124-3/4"	130", 179-1/2" Pull
<b>Weight - lb (kg)</b>	1233 (559)	1337 (606)	2000 (907), Pull-type 2104 (954)
<b>Cutting Height</b>	2" - 12"		
<b>Cutting Capacity</b>	4"		
<b>Deck</b>	All Welded, Smooth Top		
<b>Deck Thickness</b>	3/16"		
<b>Deck Height</b>	13-3/8"		
<b>Side Thickness</b>	1/4"		
<b>Safety Guards (Choose)</b>	Front: Rubber, Sgl or Dbl Chains, Rear: Sgl or Dbl Chains or Band		
<b>Skids</b>	Replaceable		
<b>Blades</b>	Free Swinging High Lift, 1/2" x 4", Heat Treated Steel		
<b>Blade Bolt</b>	Keyed with Hardened, Flat Washer & Lock Nut		
<b>Blade Tip Speed</b>	13,572 fpm	14,861 fpm	14,369 fpm
<b>Dishpan</b>	3/16" x 30-7/16", Round, Dish Shaped		
<b>Gearbox Rating<sup>^</sup></b>	210 HP		225 HP
<b>Gearbox</b>	540 RPM, 1-3/4" - 20 Spline		
<b>Gearbox Output Shaft</b>	2-3/8"		
<b>Driveline</b>	ASAE Cat. 5 with 4 Plate Slip-Clutch		
<b>Tailwheel(s)</b>	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-type		

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:



4"  
CUTTING  
CAPACITY

- Replaceable skid shoes
- Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model
- Optional Shredder Kit makes quick work of prunings and crop residue.

4"



## Right for the Job.

The RCD1884 Rotary Cutter offers a smooth deck for easy cleaning, shorter in length than single spindle cutters to help you maneuver tight spaces, as well as being ideal in orchard-type applications.



	RCD1884
Horsepower	35-60 HP
Hitch	Cat. 1 QH
Working Width (cm)	84" (213)
Weight - lb (kg)	900 (408)
Cutting Height	2"-12"
Cutting Capacity	1-1/2"
Offset	10"
Deck	All Welded
Deck Thickness	10 Gauge
Deck Height	11-5/8"
Safety Guards	Front: Rubber or Chain Rear: Metal Band
Skids	Weld-on
Additional Skids	Bolt-on
Blades	2 Each, 1/2" x 4" x 16" Heat Treated Free Swinging Alloy Steel Suction Blades
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Speed	11,693 fpm
Dishpan	10 Ga. x 24", Round, Dish Shaped
Gearbox Rating <sup>^</sup>	90 HP Main; 45 HP Side
Gearbox	540 RPM, Beveled Gears, Cast Iron Housing
Driveline	Cat. 3 with 2-Plate Slip-Clutch
Tailwheels	15" Laminated Tire or 4" x 16" Molded Rubber

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:



- Deep deck design
- All welded deck
- Short coupled for tight spaces
- Clevis style hitches
- Offset to cover your tractor tire and get closer to obstructions

1-1/2"  
CUTTING  
CAPACITY

1-1/2"



1-1/2"  
CUTTING  
CAPACITY

## A perfect fit for any size farm.

The RCR25 Series is just perfect for those medium sized chores. Designed for performance in pastures, set aside acres, roadsides, and routine farm maintenance.

**Pull-type** — The Pull-type model features two leveling rods that connect the rear axle to the front tongue. This enables the deck to stay level over uneven ground conditions. The height controlling axle cylinder is attached to two deck springs that help cushion the cutter in rough terrain.

**3-Point** — The 3-point unit utilizes two castering laminated tailwheels for smooth, trouble-free performance. The easy to attach clevis hitch is designed to fit Cat. 1 or 2 tractors on the 96" model, and Cat. 2 or 3 tractors on the 10' model.



Narrow tongue on pull-type allows for tight turns.

	RCR2596	RCR2510
<b>Horsepower</b>	Pull: 40-110 HP 3-Pt: 50-110 HP	Pull: 50-110 HP 3-Pt: 60-110 HP
<b>Hitch</b>	Cat. 1 & 2	Cat. 2 & 3
<b>Working Width (cm)</b>	7'10" (239)	9'10" (300)
<b>Overall Width</b>	8'3-3/4"	10'3-1/2"
<b>Overall Length</b>	Lift - 8'10", Pull - 11'8-3/4"	Lift - 9'4", Pull - 12'6"
<b>Weight - lb (kg)</b>	3-Pt: 1,380 (625) Pull: 1,665 (755)	3-Pt: 1,750 (793) Pull: 2,035 (923)
<b>Deck Material Thickness</b>	10 Gauge	
<b>Deck Height</b>	9-5/8"	
<b>*Safety Guards (choose)</b>	Front or Rear Chain / Front or Rear Rubber	
<b>Skids</b>	Replaceable	
<b>Gearbox Rating^</b>	210 HP Splitter 90 HP Outboard	
<b>Gearbox</b>	540 rpm, Cast Iron Housing, Beveled Gears	
<b>Cutting Height</b>	2" - 12"	2" - 10-1/2"
<b>Cutting Capacity</b>	1-1/2"	
<b>Blades</b>	1/2" x 4" Heat Treated, Free-Swinging Suction Blades	
<b>Blade Tip Speed</b>	14,592 fpm	17,749 fpm
<b>Dishpan</b>	3/16", Round, Dish Shaped	
<b>Driveline</b>	ASAE 4 Plate Slip-Clutch	
<b>Tailwheel</b>	Lift-Type: 2 each, 4" x 8" x 15-1/4" Laminated Pull-Type: 2 each, 6" x 9" x 21" Laminated or 24" Aircraft Tires	

\*See dealer for complete warranty information.

^ Based on field performance.

Color Options:



- Slip-clutch and impact absorbing cross shafts to outer gearboxes
- Constant Velocity U-Joint option on 10' Pull-type
- Slip-clutch protection on main driveline
- Fully welded 10 Gauge deck
- Round back design
- Chain or rubber shield option
- Full length skids with replaceable shoes
- 1" x 4" Blade bar



## Performance in a Medium-Duty Cutter.

The RCF30 Series is the perfect medium-duty cutter for pastures and roadside applications. Available in 3-point, semi-mount or pull-type, the RCF30 features a 2-1/2" cutting capacity and 1/4" side skirts. Plus, every RCF30 comes with the rugged dependability that Land Pride Rotary Cutters are known for.



Semi-Mount with Heavy-Duty Toolbar Axle



3-Point with Dual Beam Axle

	RCF3096	RCF3010
<b>Horsepower</b>	3-Pt: 50-110 HP Semi & Pull: 40-110 HP	3-Pt: 60-110 HP Semi & Pull: 50-110 HP
<b>Hitch</b>	Cat. 1 & 2 QH	Cat. 2 & 3 QH
<b>Working Width (cm)</b>	8' (244)	10' (305)
<b>Overall Width</b>	8'7"	10'6-1/2"
<b>Overall Length</b> (3-Pt w/Twin Beam Axle)	102"	122"
<b>Weight - lb (kg)</b> (3-Pt w/Twin Beam Axle)	1,587 (720)	2,004 (909)
<b>Blade Tip Speed</b>	16,360 fpm	540: 17,100 FPM; 1000: 17,300 fpm
<b>Deck Material Thickness</b>	10 Gauge	
<b>Side Skirt Thickness</b>	1/4"	
<b>Gearbox Rating<sup>^</sup></b>	Outboard: 130 HP, Center 210 HP	
<b>Gearbox</b>	540 RPM	540 RPM or 1,000 RPM
<b>Cutting Height</b>	2" - 12"	
<b>Cutting Capacity</b>	2-1/2" Diameter	
<b>Shielding</b>	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
<b>Skids</b>	Replaceable	
<b>Deck Height</b>	11-1/4"	11-1/2"
<b>Blades</b>	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
<b>Dishpan</b>	3/16" Round, Dish Shaped	
<b>Driveline</b>	3-Point & Semi-Mount: ASAE Cat. 4 Pull-type: ASAE Cat. 4 Equal Angle or CV	
<b>Driveline Protection</b>	Slip-Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
<b>Tires</b>	3-Point: 15" or 21" Laminated Pull-Type: 21" Laminated, 24.5" Foam Filled, or 29" Aircraft Semi-Mount: 15" or 21" Laminated	

\*See dealer for complete warranty information.

<sup>^</sup> Based on field performance.

Color Options:



2-1/2"




## Bigger and Better.

Building on the success of the RCR35 Series, Land Pride is proud to offer the RCF36 Dual-Spindle Rotary Cutter – an updated, heavy-duty, flat-top version of the original RCR35. With larger gear boxes, larger cutting capacity, and a deeper deck, the RCF36 is the ideal dual-spindle cutter for narrow areas in pastures, along roadsides, or in tree groves.



Semi-Mount

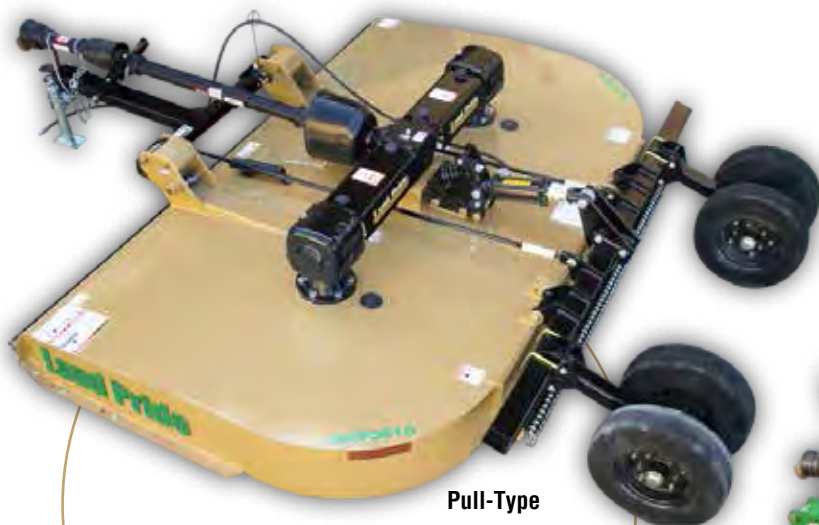

Pull-Type



3-Point with Tool Bar

	RCF3696	RCF3610
<b>Horsepower</b>	3-Pt: 50-130 HP Semi: 40-130 HP Pull: 50-130 HP	3-Pt: 60-130 HP Semi & Pull: 50-130 HP
<b>Hitch</b>	Cat. 1 & 2 QH	Cat 2 & 3 QH
<b>Working Width (cm)</b>	8' (244)	10' (305)
<b>Overall Width</b>	8'7"	10'6-1/2"
<b>Overall Length</b> (3-Pt w/Rigid Axle & Chains)	8'10"	10'2"
<b>Weight - lb (kg)</b> (3-Pt w/Rigid Axle & Chains)	1,838 (834)	2,310 (1048)
<b>Cutting Height</b>	2" - 12"	
<b>Cutting Capacity</b>	3" Diameter	
<b>Deck Thickness</b>	10 Gauge	
<b>Deck Height</b>	13"	
<b>Side Thickness</b>	1/4"	
<b>Safety Guards (Choose)</b>	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
<b>Skids</b>	Replaceable	
<b>Blades</b>	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
<b>Blade Tip Speed</b>	540: 17,100 fpm; 1000: 17,400 fpm	540: 17,100 fpm; 1000: 17,400 fpm
<b>Dishpan</b>	3/16" Round, Dish Shaped	
<b>Gearbox Rating<sup>^</sup></b>	Outboard: 210 HP, Center 210 HP	
<b>Gearbox</b>	540 RPM or 1,000 RPM	
<b>Driveline</b>	3-Point & Semi-Mount: ASAE Cat. 4 Pull-Type: ASAE Cat. 4 Equal Angle or CV	
<b>Driveline Protection</b>	Slip-Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
<b>Tires</b>	3-Point & Semi-Mount: 15" or 21" Laminated Pull-Type: 21" Laminated, 24" Foam Filled or 29" Aircraft	

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:




## Built Land Pride Tough.

The RCFM4014 3-Spindle, Rigid Deck Rotary Cutter complements our line of Land Pride Rotary Cutters. This cutter features a 14' cutting width and is built Land Pride-tough for years of dependable use in the most demanding conditions – from cotton and row-crop shredding to pasture clearing.

The heavy-duty RCFM4014 boasts a 3" cutting capacity, Cat. 4 Cross Shafts with a spring-loaded flex coupler, 1 $\frac{3}{4}$ " 20 spline Cat. 5 input shaft, 1 $\frac{3}{4}$ " output shaft, tip speed of 15,000 fpm, and gearbox ratings of 210/250 HP for the outboard boxes and T-box respectively.

The RCFM4014 can be equipped with either cutting blades bolted to a dish pan for cutting grass, weeds, and brush, or with a blade bar and shredder kit option for shredding all widths of row crops into small pieces. Fixed blades can also be added to the blade bar and shredder kit option for shredding row crops in 30" row widths or 38" to 40" row widths to reduce stalks into even smaller pieces.

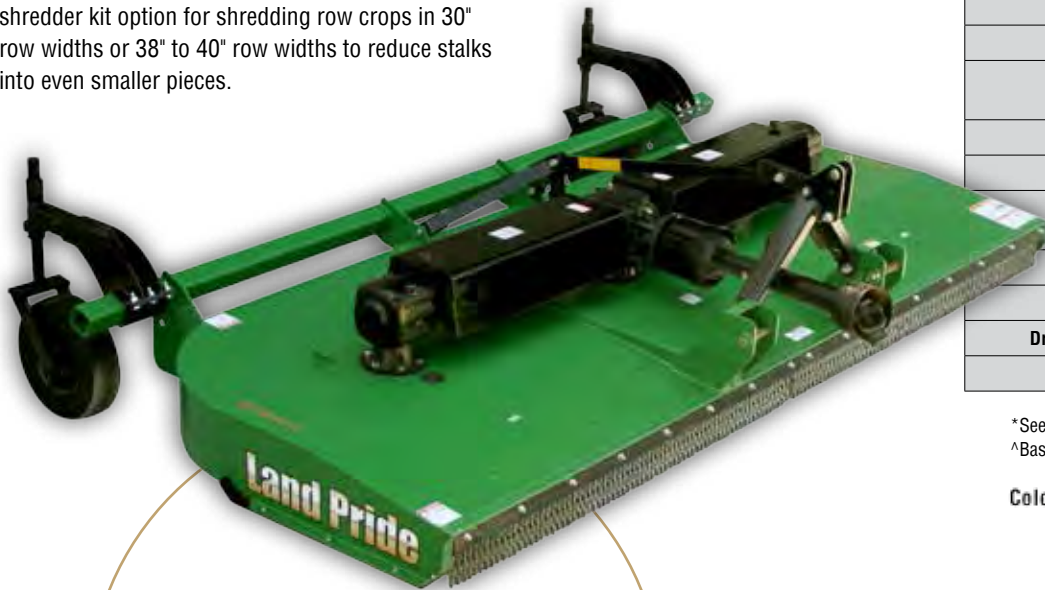

	RCFM4014
<b>Horsepower</b>	80-250 HP
<b>Hitch</b>	Cat. 2 & 3
<b>Working Width (cm)</b>	14' (427)
<b>Overall Width</b>	14' 6-1/2"
<b>Overall Length</b>	10' -1/2"
<b>Weight - lb (kg)</b>	3,095 (1,404)
<b>Cutting Height</b>	2" - 12"
<b>Cutting Capacity</b>	3" Diameter
<b>Deck Thickness</b>	10 Gauge
<b>Deck Height</b>	12"
<b>Side Thickness</b>	1/4"
<b>Safety Guards (Choose)</b>	Front: Rubber or Single Chain Rear: Rubber, Single Chain or Metal
<b>Skids</b>	Replaceable
<b>Blades</b>	1/2" x 4" Heat Treated Free Swinging Blades
<b>Blade Tip Speed</b>	15,000 fpm
<b>Dishpan</b>	3/16" Round
<b>Gearbox Rating^</b>	Outboard: 210 HP, Center 250 HP
<b>Gearbox</b>	1,000 RPM
<b>Driveline</b>	ASAE Cat. 5
<b>Driveline Protection</b>	4-Plate Slip-Clutch
<b>Tires - 2 or 3</b>	21" Laminated

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:





	DB(M)2660
Horsepower	75 HP; Min. Tractor Weight 7,000 lbs.
Hitch	Cat. 2 Std., Cat. 2 & 3 QH Clevis Type Lower Hitch
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min. Tractor Weight - lb	7,000
Weight - lb (kg)	1,788 (811)
Tractor Hydraulics Req'd	See specific model
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	2 Duplex Required
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	Depends on 3-Pt Height
Cutting Capacity	2" Diameter
Horiz. Extension	32" Maximum
Max. Horizontal Reach from Tractor Center	13'2"
Operating Tilt Arc	175 Degrees
Deck Thickness	10 Gauge
Safety Guards	Rubber, Single or Dbl Chain
Blades	2 Each, 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,600 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 4
Storage	Parking Stand
Options	Rear Tailwheel, Side Gauge Wheel

Color Options:



## Quickly Reach Inclines.

New from Land Pride, the DB2660 Ditch Bank Rotary Cutter enhances our growing line of Rotary Cutters. This new hydraulic-driven cutter boasts a number of features that will make mowing ditch banks, pond dams, or other hard to reach inclines fast, easy, and efficient.

Built for either 540 or 1000 RPM tractors, the DB2660 features a 58" cutting width, 1" cutting diameter, and 32" cutting reach. The 1/2" by 4" blades rotate clockwise at 15,000 FPM, directing debris away from the tractor. Minimum cutting height is dictated by the tractor's 3-pt height.

2"  
CUTTING  
CAPACITY

← 2" →



## Hydraulic Driven Parallel Arm Rotary Cutter.

Designed to “reach out” and cut along roadsides, over guard rails, down ditchbanks, and along side ponds, Land Pride’s RCP26 has features not found on your typical Parallel Arm Rotary Cutter.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change; thanks to the parallel arm design. Lift the cutter head up, in or out to negotiate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the RCP is also not found on your standard parallel arm cutter. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

The cutter deck is operated by a hydraulic motor, which is run by a pump powered by the PTO of the tractor utilizing the tractor hydraulics, or an optional self contained system. A flow control valve is standard equipment to protect the hydraulic system of the cutter from the high GPM many of the newer tractors now utilize. The 35 gallon oil reservoir keeps the unit running cool, and the in-line filter continually cleans the oil each time it is returned to the reservoir.

The optional electronic package enables each of the arm and deck hydraulic cylinders to be activated by a push button switch. You get instant response from the cylinders, which can be very difficult to achieve with just the tractor’s hydraulic controls.

Moving this cutter up and around obstacles, in and out next to water or roadsides is what this cutter is all about. Save time and work efficiently with the parallel arm cutter that does more!



Optional gauge wheel deck allows the cutter to float over undulations without having to constantly monitor terrain conditions.



← 2" →

	RCP2660
Horsepower	75-150 HP
Hitch	Cat. 2 & 3
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min. Tractor Weight - lb (kg)	8000 (3629)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor Provided or Self Contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	2"
Cutting Capacity	2" Diameter
Horiz. Cutting Reach	15'6" Maximum
Vertical Cutting Reach	11'5" Maximum
Below Ground Level Reach	9'1" Maximum
Operating Tilt Arc	180 Degrees
Deck Thickness	10 Gauge
Safety Guards	Front and Rear Chain Guards
Blades	2 Each, 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,600 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 3
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Options	Operator Shield Suitcase Weight Bracket Gauge Wheels



In-line filter cleans hydraulic fluid before it re-enters reservoir.



## 3 Foot longer reach than the RCP26 Series.



Great for those roadsides that want a manicured look further down the ditch, or being able to stay a little further away from the soggy banks of the pond.

### TOP QUALITY FEATURES ON RCP26 AND RCP30



Hydraulic breakaway feature pivots arm backward to avoid obstacles and protect cutter arm. Hydraulically pivots back into place.



Flow control valve compensates for various hydraulic systems.



Shut-off valve permits maintenance without oil loss.



The built in weight rack can be ordered to fit with various suitcase weight styles.



Grease zerks at all pivot points.



Optional Self-contained hydraulics.



Electronic cylinder controls provide instant response for adjustments on the go.

	RCP3060
Horsepower	95-175 HP
Hitch	Cat. 2 & 3
Working Width (cm)	58" (147)
Min. Transport Width	10'1"
Min Tractor Weight - lb (kg)	12,000 (5443)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity	35 Gallons
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor Provided or Self Contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Min. Cutting Height	2"
Cutting Capacity	2" Diameter
Horiz. Cutting Reach	18'10" Maximum
Vertical Cutting Reach	13'5" Maximum
Below Ground Level Reach	11' Maximum
Operating Tilt Arc	180 Degrees
Deck Thickness	Front and Rear Chain Guards
Safety Guards	10 Gauge
Blades	2 Each 1/2" x 4"
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Dishpan	3/16" x 21" Round, Dish Shaped
Driveline	Cat. 3, 1 3/8" 21 Spline
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Options	Operator Shield Suitcase Wt. Bracket (Required) Gauge Wheels

Additional tractor weight (dual tractor wheel, calcium, etc.) may be needed.

Color:



- Hydraulic break away and reset
- Case drain deck motor
- Gauge wheel package allows unit to follow ground contour while operating in float position



## Mow Like the Big Boys!

Designed with smaller tractors and smaller areas to cut in mind, our 12' Rotary Cutter has a lot of the features found in our larger folding cutters. The 12' width, sharp turning radius, and low tongue weight makes this an ideal rotary cutter for compact tractor owners.



- Center spring-cushioned axle
- Great size for country estates
- Dual hinge rods for levelling
- Narrow tongue design for tight turns

	RC2512
Horsepower	40-100 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling
Working Width (cm)	12' (366)
Min. Transport Width	7'11"
Overall Width	12'7"
Overall Length	13'3"
Machine Weight - lb (kg)	2,540 (1152)
Tongue Weight - lb	793
Cutting Height	1-1/2" - 12"
Cutting Capacity	1-1/2"
Deck Thickness	10 Gauge
Deck Height	11"
Deck Shock Protection	Spring Cushioned Center Axle
Side Skirt Thickness	3/16" Plate
Safety Guards	Front and Rear Chain - Std
Skid Shoes	Wings & Center, Replaceable
Blades	2 per Section, 1/2" x 3' Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center: 16,500 fpm, Wings: 16,000 fpm
Dishpan	10 Gauge, Round, Dish Shaped with 1" x 3-1/2" Blade Bar
Wing Cutting Angle	22 Deg. Down, 45 Deg. Up
Wing Transport Locks	Standard
Wing Hydraulics	2" x 8" Cylinder, Hoses & Fittings
Height Adjustments	2-1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Gearbox Rating <sup>^</sup>	540 rpm: 160 HP Divider; 100 HP Center & Wings
Gearbox Input Shaft	1-3/8" 6 Spline
Gearbox Output Shaft	1-1/2"
Input Driveline	Constant Velocity U-Joint, Cat. 4
Connecting Driveline	Cat. 3 Slip-Clutch
Wheels (4)	21" Laminated Tires 20.5" Aircraft Tires Tapered Roller Bearings & Cast Iron 5-Bolt Hubs with 1-3/4" Shaft
Optional	Light Kit

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:





## Quality with value built in.

Land Pride has packaged our renowned quality and dependability into an economy 15' Cutter. With a 1 year hitch-to-tailwheel warranty, plus a 5 year gearbox warranty, the RC2515 will give you years of dependable service and acres and acres of cut grass.



Optional 29" Aircraft tires provide extra cushioning over laminate tires.



The Land Pride gearbox features a 1 1/8" output shaft.



Deck-mounted spring cushion provides a smooth ride in rough terrain.



Wings are leveled with easy-to-access and easy-to-adjust turnbuckles.



All three connecting drivelines offer two-plate slip clutch protection.



	RC2515
Horsepower	50-100 HP
Hitch	Pull-Type; Self Leveling Hitch & Clevis
Working Width	15'
Min. Transport Width	8' 4"
Overall Width	15' 7"
Overall Length	15' 6"
Machine Weight	3,255 lb.
Tongue Weight	1123 lb.
Cutting Height	2" - 13"
Cutting Capacity	1 1/2"
Deck Thickness	10 Gauge
Deck Height	11 1/4"
Deck Shock Protection	Spring Cushioned
Side Skirt Thickness	1/4" Plate
Safety Guards	Front and Rear, Chain or Rubber
Skid Shoes	Wings & Center, Replaceable
Blades	2 per Section, 1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center & Wings: 15,000 fpm
Dishpan	10 Gauge, Round, Dish Shaped with 1" x 4" Blade Bar
Wing Cutting Angle	22 Deg. Down, 45 Deg. Up
Wing Transport Locks	Standard
Wing Hydraulics	2 1/2" x 10" Cylinder, Hoses & Fittings
Height Adjustments	2 1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Gearbox Rating^	540 rpm: 160 HP Divider; 100 HP Center & Wings
Gearbox Input Shaft	1 3/8" 6 Spline
Gearbox Output Shaft	1 5/8"
Input Driveline	Constant Velocity U-Joint, Cat. 4
Connecting Driveline	Cat. 3 Slip-Clutch
Wheels (4 or 6)	21" Laminated Tires 29" Aircraft Tires
Optional	Light Kit

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:



## Give your pasture that well-groomed look!

2-1/2"  
CUTTING  
CAPACITY

Deck Rings  
Available!

2-1/2"

The 1" thick, 4" wide reinforcement aids the dishpan in withstanding the constant punishment the overall drivetrain must endure.

**PLAINSMAN**  
Series 2

The heavy-duty turnbuckle keeps the center and wing axles at the same cutting height. With grease fittings incorporated in the turnbuckle, free motion is maintained for quality performance.

- 1" Solid and continuous hinge rods provide superior support from section to section
- Smooth top for easy clean off

	RC3615 MEDIUM DUTY
Horsepower	50-160 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	8'
Overall Length	15' 6"
Machine Weight - lb (kg)	3,730 (1692)
Tongue Weight - lb	1,240
Cutting Height	2" - 14"
Cutting Capacity	2-1/2"
Height Adjustment	3" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Deck Thickness	10 Gauge
Deck Height	12"
Deck Shock Protection	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber
Skid Shoes	Wings and Center, Replaceable
Blades (2 per section)	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 15,268 fpm on Center, 15,000 fpm on Wings 1000 RPM: 15,578 fpm on Center, 14,620 fpm on Wings
Dishpan	3/16" Round, Dish Shaped with 1" x 4" Blade Bar
Hydraulics	Wings: 2-1/2" x 12" Cylinder, Hoses & Fittings
Gearbox Rating <sup>^</sup>	540 or 1000 RPM: 160 HP Divider, 130 HP Center & Wings
Gearbox Output Shaft	2"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 4 with Slip-Clutch
Max. Turning Angle	80° w/Constant Velocity U-Joint
Tires - 4 or 6	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options: 

**5 YEAR**  
Limited Gearbox  
Warranty



## The Best of Both.

Combine the rugged, heavy-duty gearboxes from our RC5615 and the proven, dependable deck from our RC3615 and you get the Land Pride RC4015. With a 3-1/2" cutting capacity and a blade tip speed of 16,300 fpm, the RC4015 is a solid medium-duty cutter in a long line of quality folding cutters from Land Pride.

### RANCHER

See a Video of the RC4015  
at [landpride.com](http://landpride.com)



3-1/2"  
CUTTING  
CAPACITY

3-1/2"



	RC4015
Horsepower	50-200 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 9"
Min. Transport Width	8'
Overall Length	15' 6"
Machine Weight - lb (kg)	3,930 (1782)
Tongue Weight - lb	1,300
Cutting Height	2" - 14"
Cutting Capacity	3-1/2"
Height Adjustment	3" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Deck Thickness	10 Gauge
Deck Height	12"
Deck Shock Protection	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber
Skid Shoes	Wings and Center, Replaceable
Blades (2 per section)	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,288 fpm on Center, 16,000 fpm on Wings
Dishpan	3/16" Round, Dish Shaped with 1" x 4" Blade Bar
Hydraulics	Wings: 2-1/2" x 12" Cylinder, Hoses & Fittings
Gearbox Rating <sup>A</sup>	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 4 with Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 4 or 6	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

<sup>A</sup>Based on field performance.

Color Options:



# RC4615 15' FOLDING ROTARY CUTTER

HP  
50-250

HITCH  
Pull-Type



## WRANGLER

Land Pride's RC4615 combines the best of our RC4015 and RC5615, along with a host of new features, to create a soon-to-be leader in the folding cutter market.

Combine Land Pride's proven deck design of the RC4015 with the rugged gearboxes from our RC5615; then add in the dependable axles and drivelines from the RC5615 and the new RC4615 is born. Made for pasture maintenance yet heavy enough for contractor use, the RC4615 is a solid, heavy-duty cutter from the leader in Folding Rotary Cutters.

The RC4615 boasts some impressive features: 3.5" cutting capacity, 250 HP splitter gearbox, 210 HP center and wing gearboxes, Cat. 6 main driveline, Cat. 4 wing drivelines, 10 gauge solid welded deck, and beveled skid shoes to prevent gouging.



Drivelines on the RC4615 feature end-cap grease zerks for superior serviceability.



Beveled wing skid shoes prevent gouging when traveling over uneven terrain.



PTO Support bracket aids in hooking up heavy drivelines then folds away when cutter is in use.



New from LP – our self-leveling Performance Hitch is draw-bar friendly and easy for one person to hook up.

	RC4615 HEAVY-DUTY
<b>Horsepower</b>	50-250 HP
<b>Hitch</b>	Pull-Type, Standard Clevis, LP Performance Self-Leveling, Ball, Pintle, or Bar-Tite Hitch
<b>Working Width (cm)</b>	15' (457)
<b>Overall Width</b>	15' 8"
<b>Min. Transport Width</b>	10'3"
<b>Overall Length</b>	16'
<b>Machine Weight - lb</b>	4,550
<b>Cutting Height</b>	2" - 14"
<b>Cutting Capacity</b>	3-1/2"
<b>Tongue Weight - lb</b>	1,650
<b>Deck Thickness</b>	10 Gauge Top
<b>Deck Height</b>	12"
<b>Deck Shock Protection</b>	Independent Wheel Arm Springs
<b>Side Thickness</b>	1/4"
<b>Safety Guards (must choose)</b>	Front & Rear: Single or Double Chain or Rubber Guard
<b>Skid Shoes</b>	Wings and Center, Replaceable, Beveled to prevent gouging
<b>Blades</b>	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
<b>Blade Bolt</b>	Keyed with Hardened Flatwasher & Lock Nut
<b>Blade Overlap</b>	6"
<b>Blade Tip Speed (Feet per minute)</b>	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings; 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
<b>Dishpan</b>	3/16", Round, Dish Shaped with 1" x 4" Blade Bar
<b>Hydraulics</b>	Wings: 3" x 12" Cylinder, Hoses and Fittings Axles: 3" x 8"
<b>Gearbox Rating<sup>^</sup></b>	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
<b>Gearbox Output Shaft</b>	2-3/8"
<b>Gearbox Input Shaft</b>	1-3/4" 20 spline
<b>Input Driveline</b>	Cat. 6 CV
<b>Connecting Drivelines</b>	Choice of Cat. 4 or Cat. 5 Driveline Slip-Clutch
<b>Max. Turning Angle</b>	80° with Constant Velocity U-Joint
<b>Tires - 6 or 8</b>	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:

**7 YEAR**  
Limited Gearbox  
Warranty



## Smooth top and bottom design.

Land Pride's 56 Series, 15 foot cutter is smooth on top, which allows debris and moisture to roll off or be easily swept or blown off. And its smooth on bottom, which means less chance of dry caking material getting lodged in tight corners, which again, means less time for cleaning.



**Heavy-Duty Dishpan**  
This is spin balanced for smooth operation.

- 9' 1" Transport Width
- Smooth top and bottom design
- Replaceable 1/4" side skirts with replaceable skid shoes
- High blade tip speed



	RC5615 HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9' 1"
Overall Length	16'
Machine Weight - lb (kg)	5,446 (2470)
Cutting Height	2" - 14"
Cutting Capacity	4"
Tongue Weight - lb	2,080
Deck Thickness	7 Gauge Bottom; 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front & Rear: Single or Double Chain or Rubber Guard
Skid Shoes	Wings and Center, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings; 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Dishpan	3/16", Round, Dish Shaped with 1" x 5" Blade Bar
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axles: 3-1/2" x 8"
Gearbox Rating^	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 Driveline Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:



## Nothing stands in our way!

The extra heavy-duty 66 Series Rotary Cutter has that extra muscle to cut in extreme conditions, and still give you the excellent appearance when completed. Cutting 4-1/2" material allows you to tackle a great deal of obstacles when cleaning up neglected pastures or fields.




## DOMINATOR

4-1/2"  
CUTTING  
CAPACITY

4-1/2"

Optional full welded deck rings keep blades from damaging the deck.

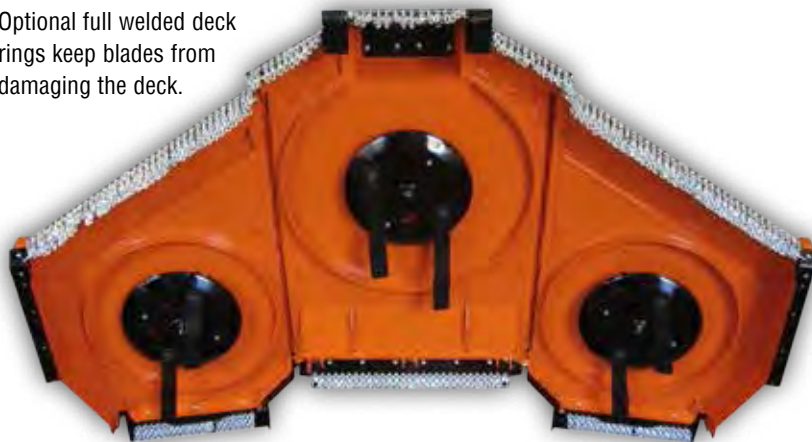

Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

	RC6615 EXTRA HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9' 1"
Overall Length	16'
Machine Weight - lb (kg)	5,660 (2567)
Cutting Height	2" - 14"
Cutting Capacity	4-1/2"
Tongue Weight - lb	2,080
Deck Thickness	7 Gauge Bottom, 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Independent Wheel Arm Springs
Deck Rings	Optional
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front: Single or Double Chain, Double Chain Guard w/Cable, or Rubber Guard Rear: Single or Double Chain, Double Chain Guard w/Cable, or Rubber Guard
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped with 1" x 5" Blade Bar
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:





## Go all in with your next bid!



### DOMINATOR

All of the features found on our RC66 Series Rotary Cutter and more!

**4-1/2"  
CUTTING  
CAPACITY**



**Extra Heavy-Duty Dishpan**  
Our 1" thick plate adds superior strength to our dishpan.

4-1/2"

Our RCB66 Series Rotary Cutters offer many of the additional features that counties, states, and contract cutters are looking for.

- 4-1/2" Cutting capacity
- 7 Gauge bottom, 10 gauge top
- 12" Deck height
- Extra heavy-duty gearboxes with 2-3/8" output shafts
- Spring cushioned axle
- Optional deck rings
- Optional tool box\*
- Rephasing cylinders on wing axles for levelling the wings
- Optional walking tandem axles on center and wings for a smoother pull
- Independent wing hydraulics
- Cable winch (optional) for raising or lowering the wings in a hydraulic failure
- Wing skid shoe: AR400 steel\*
- SMV Sign\*



Also available in a 10' offset model.

\*Unique to this series.

	RCB6615 EXTRA HEAVY DUTY
Horsepower	50-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	15' (457)
Overall Width	15' 8"
Min. Transport Width	9'1"
Overall Length	17' 1"
Machine Weight - lb (kg)	5,738 (2603)
Cutting Height	2" - 14"
Cutting Capacity	4-1/2"
Tongue Weight - lb	1,842
Deck Thickness	7 Gauge Bottom, 10 Gauge Top
Deck Height	12"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4" Replaceable
Safety Guards (must choose)	Front: Single or Double Chain, Dbl Chain w/Cable, or Rubber Guard Rear: Single or Double Chain, Dbl Chain w/Cable, or Rubber Guard
Skid Shoes	2 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped with 1" Steel Plate Support
Hydraulics	6" Wings: 3-1/2" x 8" Cylinder Axle: Center-3-1/2" x 8" Cylinder RH Wing-3-1/4" x 8", LH Wing-3" x 8"
Gearbox Rating <sup>^</sup>	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 5 Slip-Clutch
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 6 or 8	21" Laminated 29" Used Aircraft 25.5" Foam-Filled

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:  

**7 YEAR**  
Limited Gearbox  
Warranty

**Land Pride**

## Making roadside cutting safe and efficient.



RC5610

Land Pride's wheel base offers a smoother pull of the cutter, which holds slopes better and reduces overall operator fatigue.



- Left hand weight box
- 5 or 6 Wheel option
- Optional hitch configurations
- Optional deck rings
- Replaceable 1/4" sideskirt with replaceable skid shoe (RC56/66 only)
- Smooth top design
- Heavy-duty dishpans (RC56/66 only)
- 3-1/2" Cutting capacity on RC46
- 4" Cutting capacity on RC56
- 4-1/2" Cutting capacity on RC66

\*See dealer for complete warranty information.  
^Based on field performance.

Color Options:



	RC4610	RC5610	RC6610
Horsepower	50-250 HP		
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite		
Working Width (cm)	10' 6" (320)		
Overall Width	11' 8"	11' 7"	
Min. Transport Width	8' 10"	7' 6-1/2"	
Overall Length	15' 6"	16' 5"	
Machine Weight - lb (kg)	4,240 (1923)	5,292 (2400)	
Cutting Height	2" - 14"		
Cutting Capacity	3-1/2"	4"	4-1/2"
Tongue Weight - lb	1,920	2,060	
Deck Thickness	10 Gauge	7 Gauge Bottom, 10 Gauge Top	
Deck Height	12"		
Deck Shock Protection	Independent Wheel Arm Springs; Optional Center Walking Tandems RC56/66 only		
Deck Rings	Optional		
Side Thickness	1/4"	1/4" Replaceable	
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable		
Safety Guards (must choose)	RC46: Front: Single or Double Chain Rear: Single or Double Chain		
	RC56/66: Front: Single or Double Chain, Double Chain with Cable, or Rubber Guard Rear: Single or Double Chain, Double Chain with Cable, or Rubber Guard		
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel w/Uplift		
Blade Bolt	Keyed w/Hardened Flatwasher & Lock Nut		
Blade Tip Speed (Feet per minute)	540 RPM: 16,300 fpm on Center, 16,300 fpm on Wings 1000 RPM: 16,300 fpm on Center, 16,000 fpm on Wings		
Blade Overlap	6"		
Dishpan	3/16" Round, Dish Shaped with 1" x 5" Blade Bar		
Hydraulics	RC46: Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: 3" x 8" Cylinder, Hoses, Fittings, & Stroke Control Spacers		
	RC56/66: Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings, & Stroke Control Spacers		
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, RC46/56: 210 HP Center & Wing RC66: 225 HP Center & Wing		
Gearbox Output Shaft	2-3/8"		
Gearbox Input Shaft	1-3/4" 20 Spline		
Input Driveline	Cat. 6 CV or Cat. 5 Conventional		
Connecting Drivelines	Cat. 4 or 5 with 5 Slip-Clutch		
Max. Turning Angle	80° with Constant Velocity U-Joint		
Tires - 5 or 6	21" Laminated, 29" Used Aircraft; 25.5" Foam-Filled		



## Plainsman



Land Pride's RC3620 is the ideal Rotary Cutter for grassy fields, pastures, waterways, buffer strips, and set-aside acres and handles saplings up to 2" in diameter. With tips speeds of 16,000 to 16,500, gearboxes rated at 250 HP and 150 HP, 1-3/4" input shafts and 2" output shafts, and optional CV drivelines, this unit will make quick and efficient work of the largest jobs.

2"  
CUTTING  
CAPACITY



Also available as a 14' offset model: RC3614.

	RC3614	RC3620
Horsepower	70-160 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
Working Width (cm)	14' (426)	20' (607)
Overall Width	15'	20' 10"
Min. Transport Width	8' 9"	9' 11"
Overall Length	17' 6" with Laminated Tires	
Machine Weight - lb (kg)	5,990 (2717)	6,280 (2849)
Cutting Height	2" - 12"	
Cutting Capacity	2" Diameter	
Tongue Weight - lb	2,220	1,750
Max. Turning Angle	80° with Constant Velocity U-Joint	
Deck Height	13"	
Deck Thickness	10 Gauge	
Deck Shock Protection	Spring Cushioned Axle	
Deck Rings	Optional	
Side Thickness	1/4"	
Safety Guards (must choose)	Front & Rear: Single or Double Chain	
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable	
Blades	1/2" x 4" High Lift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 RPM: 16,000 fpm on Center, 16,000 fpm on Wings 1000 RPM: 16,500 fpm on Center, 16,500 fpm on Wings	
Blade Overlap	6"	
Dishpan	10 Gauge Round, Dish Shaped w/ 1" x 4-1/2" Blade Bar	
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: Center-2-3/4" x 8" Cylinder, RH Wing-3" x 8", LH Wing-3-1/4" x 8" Hoses, Fittings and Stroke Control Spacers	
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 150 HP Ctr & Wings	
Gearbox Output Shaft	2"	
Gearbox Input Shaft	1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV or Cat. 5 Conventional	
Connecting Drivelines	4-Plate Slip Clutch; Cat. 4	
Tires	21" Laminated RC3614: 5, 6 or 8 RC3620: 6 or 8 29" Used Aircraft 27" Foam-Filled	

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:



## WRANGLER

RC4620 HEAVY DUTY	
Horsepower	70-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	20' (607)
Overall Width	20' 10"
Min. Transport Width	9' 11"
Overall Length	17' 6" with Laminated Tires
Machine Weight - lb (kg)	6,280 (2849)
Cutting Height	2" - 12"
Cutting Capacity	3" Diameter
Tongue Weight - lb	1,750
Max. Turning Angle	80° with Constant Velocity U-Joint
Deck Height	13"
Deck Thickness	10 Gauge
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front & Rear: Single or Double Chain
Skid Shoes	1 Each Wing, 2 on Center Section, Replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,000 fpm 1000 RPM: 18,000
Blade Overlap	6"
Blade Bar	1" Thick, Standard
Dishpan	Round, Dish Shaped, Optional
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: LH Wing-2-3/4" x 8" Cylinder, RH Wing-3" x 8", Center-3-1/4" x 8" Hoses, Fittings and Stroke Control Spacers
Gearbox Rating <sup>^</sup>	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Cat. 5
Tires 6 or 8	21" Laminated 29" Used Aircraft 27" Foam-Filled

**NEW!**

Right of ways, roadsides, pastures, open areas, and row crop fields are all candidates for the RC4620. It handles brush up to 3" in diameter, features a 7-year gearbox warranty, and has blade tip speeds up to 18,000 fpm. The gearboxes are rated at 250 HP and 210 HP, center and wing respectively, and boast 20-spline, 1.75" input shafts and 2.375" output shafts. Our gearboxes come with a 7-Year Limited Warranty but unlike the competition, Land Pride pays parts AND labor for a full 5-Years! The main driveline is available as a Cat 6 Constant Velocity, wing drivelines are Cat 5.

Rephasing axles allow for shorter axles which in turn leads to less weight on the tractor draw bar. Also included is a new diamond blade bar with an optional bolt-on stump jumper. Decks feature 1/4" side skirts and smooth-top, 10 gauge decks.

- 1/4" Side Skirts
- Smooth-top, 10 Gauge Decks
- 2" to 12" Cutting Height
- 3" Cutting Capacity
- Diamond Blade Bar with optional Bolt-on Stump Jumper
- Choice of 3 Tires, including 21" Laminated, 29" Aircraft or 27" Foam Filled Tires
- Replaceable and Reversible Wing and Center Deck Skid Shoes
- Single or Double Chain Guarding
- Hydraulic Rephasing Cylinders on Axle
- Shorter Axle for Lower Draw Bar Weight
- Available Land Pride Performance Hitch
- Optional Fully-Welded Deck Rings
- Optional Light Kit

**3"  
CUTTING  
CAPACITY**

3"

Also available as a 14'  
offset model: RC4614.

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:





## 14' - Largest offset cutter in the family!



A 14' swath on a roadside can knock out a lot of work in one pass. Equipped with extra heavy-duty gearboxes and drivelines, and a dish pan to help protect it all, this cutter is ready to go to work!

**3"  
CUTTING  
CAPACITY**

### Commander

- Heavy-duty stump jumper
- Left side weight box



Choice of used aircraft tires w/wo foam or laminated tires.

#### Hitches Available on all 36 Series and above Folding Cutters



**Standard Clevis Hitch**  
Pivots up and down for uneven terrain



**LP Performance Hitch**  
This drawbar-friendly, self-leveling hitch pivots up, down, and side-to-side, and is held upright with the hitch pin to allow single-person hook-up.



**Bar-tite™ Clevis Hitch**  
Bolts tight to drawbar which eliminates drawbar wear. Swivels up and down, and rotates on greasable shaft

	RC5014
Horsepower	70-250 HP
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Working Width (cm)	13' 6"
Overall Width	14' 7"
Min. Transport Width	8' 9"
Overall Length	19' 3" w/Laminated Tires
Machine Weight - lb (kg)	7,282 (3303)
Cutting Height	2" - 14"
Cutting Capacity	3" Diameter
Tongue Weight - lb	2,300
Deck Thickness	3/16"
Deck Height	10-1/2"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Single or Double Chain or Rubber
Skid Shoes	1 on Wing and Weight Box, 2 on Center Section, Replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on Center, 17,329 fpm on Wings 1000 RPM: 18,165 fpm on Center, 18,317 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped w/1" Steel Plate Support
Hydraulics	Wings: 3-1/2" x 8" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox Rating <sup>^</sup>	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wing
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	Slip Clutch; Cat. 5
Max. Turning Angle	80° with Constant Velocity U-Joint
Tires - 5 or 6	21" Laminated, 29" Used Aircraft, 27" Foam-Filled

\*See dealer for complete warranty information.

<sup>^</sup>Based on field performance.

Color Options:

**7 YEAR**  
Limited Gearbox  
Warranty




## Be More Productive, 20' at a Time.

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for the 20' Commander. Wing decks float independently, and follow the contour of the land leaving a nicely cut surface.



The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications.

Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



**Commander**

	RC5020 HEAVY DUTY
Horsepower	70-250 HP
Hitch	Pull-Type
Working Width (cm)	20' (607)
Overall Width	20' 9-1/2"
Min. Transport Width	8' 9"
Overall Length	19' 3" with Laminated Tires
Machine Weight - lb (kg)	6,528 (2961)
Cutting Height	2" - 14"
Cutting Capacity	3" Diameter
Hitch	Standard Clevis, Swivel, Ball, Pintle, or Bar-Tite Hitch
Tongue Weight - lb	2,300
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Thickness	3/16"
Deck Height	10-1/2"
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness	1/4"
Safety Guards (must choose)	Front and Rear: Single or Double Chain or Rubber
Skid Shoes	Reversible, 1 each wing, 2 on center section, replaceable
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on Center, 17,329 fpm on Wings 1000 RPM: 18,165 fpm on Center, 18,317 fpm on Wings
Blade Overlap	6"
Dishpan	3/16" Round, Dish Shaped w/ 1" Steel Plate Support
Baffle Kit	Optional - Rear
Hydraulics	Wings: 3-1/2" x 12" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV or Cat. 5 Conventional
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Tires 6 or 8	21" Laminated 29" Used Aircraft 27" Foam-Filled

\*See dealer for complete warranty information.

^Based on field performance.

Color Options:





## Versatility to fit every need.

Our 05 Series Reverse Tine Rotary Tillers are perfect for popular subcompact tractors. If you are tilling your yard for reseeding, or getting the garden ready for spring planting, turn your ground over efficiently with the best small tiller available!

- Cast iron bearing mounts
- Adjustable rear deflector
- Front rubber flap to keep dirt in
- Lower hitch clevises for easier hook up to tractor



	RTR0542	RTR0550
Horsepower	Up to 25 HP	
Hitch	Cat. 1	
Width-endplate to endplate (cm)	42" (107)	50" (127)
Overall width	46-1/2" (118)	54-1/2" (139)
Weight - lb (kg)	268 (122)	298 (135)
Number of Flanges	5	6
No. of Blades per Flange	4 C-Shape	
Blade Spacing	7-7/8"	6-3/4"
Max. Tilling Depth	6-1/2"	
Skid Shoe Settings	4	
Rotor Swing Diameter	13"	
Rotor Shaft Speed	230 rpm at 540 rpm PTO	
PTO Driveline	ASAE Category 2 Off-Center Shear Bolt or Slip Clutch	
Gearbox	25 HP, 540 rpm, Cast Iron Housing, Drain Plug	
Drive Chain	#80 High Tensile in Oil Bath	
Sprockets	Hardened Teeth, Splined Center	

\*See dealer for complete warranty information.

Tilling depth depends on conditions and fluffiness of tilled area.



## The most popular Rotary Tiller for compact tractors!

The Land Pride RTA12 Series Forward-Till and RTR12 Series Reverse-Till Rotary Tillers are a great seedbed preparation tool for either general gardening or lawn/landscape seeding. With uses in many residential applications, Land Pride 12 Series Rotary Tillers offer an economical yet durable tilling solution. These units feature a 3 year gearbox warranty and a 10 year chain and sprocket warranty, 42", 50", 58", 66", 74" & 82" working widths, and 6-1/2" tilling depth.

- Offset capabilities
- Forward or Reverse models available
- Lower clevis hitch for easier hook-up
- Steel plate upper hitch



	RTA1242 RTR1242	RTA1250 RTR1250	RTA1258 RTR1258	RTA1266 RTR1266	RTA1274 RTR1274	RTA1282 RTR1282
Horsepower	15-40 HP		20-50 HP		25-60 HP	30-60 HP
Hitch	Cat. 1					
Width-Endplate to Endplate (cm)	42" (107)	50" (127)	58" (147)	66" (168)	74" (188)	82" (208)
Overall Width RTA RTR	47-3/8" 48-1/4"	55-3/8" 56-1/4"	63-3/8" 64-1/4"	71-3/8" 72-1/4"	79-3/8" 80-1/4"	87-1/8" 87-1/4"
Weight - lb (kg) RTA RTR	391 (177) 404 (183)	421 (191) 435 (197)	448 (203) 463 (210)	476 (216) 493 (224)	503 (228) 521 (236)	552 (250) 581 (264)
Number of Flanges	5	6	7	8	9	10
No. of Blades per Flange	4 C-Shape					
Blade Spacing	7-7/8"					
Max. Tilling Depth	6-1/2"					
Skid Shoe Settings	7					
Rotor Swing Diameter	15"					
Rotor Shaft Speed	211 rpm at 540 rpm PTO					
PTO Driveline	Category 2 Slip Clutch					
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug					
Drive Chain	#80 High Tensile in Oil Bath					
Sprockets	Hardened Teeth, Splined Center					

\*See dealer for complete warranty information.

Color Options:






## Sized right for hobby farms and nurseries.

The 15 Series Land Pride Rotary Tiller is sized just right for compact tractors that are used on hobby farms and in nurseries in every corner of the country.

The sideshift feature on the 15 Series Rotary Tillers enables you to shift the tiller to the right to cover a tire track or get closer to obstacles, while allowing the driveline to remain straight.

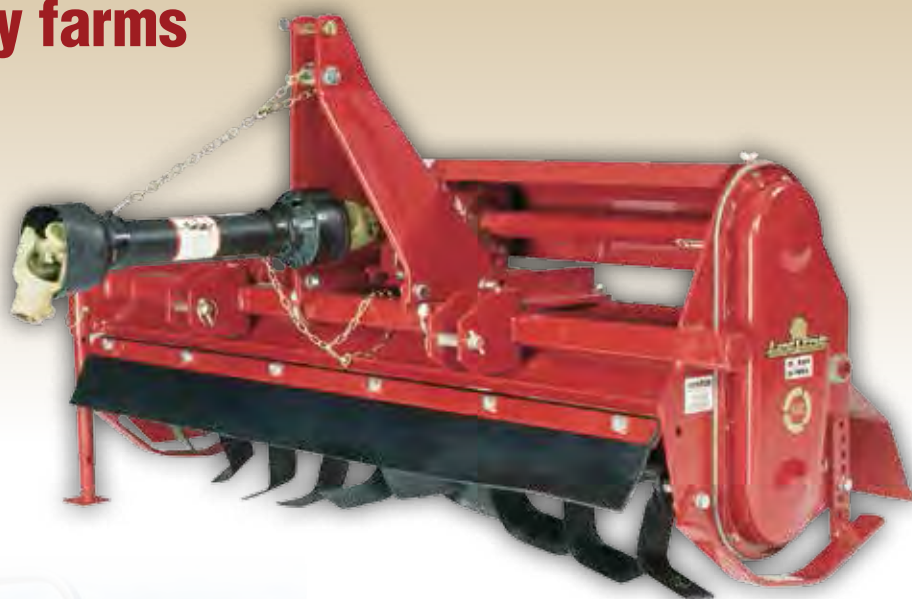

	RTA1558 RTR1558	RTA1566 RTR1566	RTA1574 RTR1574
<b>Horsepower</b>	17-50 HP		
<b>Hitch</b>	Cat. 1		
<b>Width-Endplate to Endplate (cm)</b>	58" (147)	66" (168)	74" (188)
<b>Overall Width</b>	64-1/4"	72-1/4"	80-1/4"
<b>Weight - lb (kg)</b>	489 (222)	523 (237)	557 (253)
<b>Number of Flanges</b>	7	8	9
<b>No. of Blades per Flange</b>	4 C-Shape		
<b>Blade Spacing</b>	7-7/8"		
<b>Max. Tilling Depth</b>	6-1/2"		
<b>Skid Shoe Settings</b>	7		
<b>Rotor Swing Diameter</b>	15"		
<b>Rotor Shaft Speed</b>	211 rpm at 540 rpm PTO		
<b>PTO Driveline</b>	ASAE Category 3, Off-Center Shear Bolt or Slip Clutch		
<b>Gearbox</b>	50 HP, 540 rpm, Cast Iron Housing, Drain Plug		
<b>Drive Chain</b>	#80 High Tensile in Oil Bath		
<b>Sprockets</b>	Hardened Teeth, Splined Center		

\*See dealer for complete warranty information.  
See page 48 for reverse-till diagram.

Color Options:    



## We have traditional Forward Rotation...

Available in two popular widths, the Land Pride RTA20 Series Rotary Tiller effortlessly turns up hard-packed ground, leaving a perfect seedbed for gardens or grass. Suited for up to 50 HP tractors, this model fits a wide range of tractor owners, from landscapers or city and park maintenance operations to golf course superintendents.

The Land Pride RTR20 Series Rotary Tillers are just right for home gardening, landscape work, food plot maintenance, and light commercial use. Available in 64" and 72" widths, RTR20 Series Rotary Tillers feature a reverse tilling action for tough ground conditions. The reverse action of the rotor brings material up and over the top, burying heavier clods and small rocks, leaving the fines on top for a perfect seed bed.

Both models use standard Land Pride features like a stamped chain cover, adjustable rear deflector, heavy-duty driveline and parking stand – in the end the quality and dependability shine through.



## And the most popular Reverse Rotation...



	RTA2064	RTA2072	RTR2064	RTR2072
<b>Horsepower</b>	23-50 HP			
<b>Hitch</b>	Cat. 1			
<b>Width-Endplate to Endplate (cm)</b>	64" (162)	72" (183)	64" (162)	72" (183)
<b>Overall Width</b>	70-13/16"	77-7/8"	70-13/16"	77-7/8"
<b>Weight - lb (kg)</b>	689 (313)	734 (333)	748 (339)	795 (361)
<b>Number of Flanges</b>	8	9	8	9
<b>No. of Blades per Flange</b>	6 C-Shape			
<b>Blade Spacing</b>	7-1/2"			
<b>Max. Tilling Depth</b>	7"			
<b>Skid Shoe Settings</b>	7			
<b>Offset</b>	14"	18"	14"	18"
<b>Number of Sifting Tines</b>	N/A		43	48
<b>Rotor Swing Diameter</b>	17"			
<b>Rotor Shaft Speed</b>	220 rpm at 540 rpm PTO			
<b>PTO Driveline</b>	ASAE Category 3, Heavy Duty Shear Bolt or Slip Clutch			
<b>Gearbox</b>	50 HP, 540 rpm, Cast Iron Housing, Drain Plug			
<b>Drive Chain</b>	#80 High Tensile in Oil Bath			
<b>Sprockets</b>	Hardened Teeth, Splined Center			

\*See dealer for complete warranty information.  
Tilling depth depends on conditions and fluffiness of tilled area.  
See page 48 for reverse-till diagram.

Color Options:





## A contractor's dream.

Ideal for landscapers and gardeners, the Land Pride RTA25 Series Rotary Tillers prepare seedbeds for gardening or lawn planting. Rugged and dependable, the RTA25 features a heavy-duty driveline, a parking stand for easy hook-up, and optional down pressure springs apply pressure on the rear deflector, holding larger debris in the tines for better pulverization in tough leveling conditions.



	RTA2562	RTA2570	RTA3576
Horsepower	25-55 HP		35-75 HP
Hitch	Cat. 1		Cat. 1 & 2
Width-Endplate to Endplate (cm)	64" (162)	70" (178)	76" (193)
Overall Width	68"	76"	81-1/2"
Weight - lb (kg)	649 (294)	663 (301)	856 (388)
Number of Flanges	8	9	8
No. of Blades per Flange	6 C-Shape		6 C-Shape
Blade Spacing	7-7/8"		9"
Max. Tilling Depth	7"		7"
Skid Shoe Settings	6		6
Rotor Swing Dia.	17"		19"
Rotor Shaft Speed	220 rpm at 540 rpm PTO		204 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 3 Heavy Duty Shear Bolt or Slip Clutch		ASAE Category 4 Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug		75 HP 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 High Tensile in Oil Bath		#100 High Tensile in Oil Bath
Sprockets	Hardened Teeth, Splined Center		Hardened Teeth, Splined Center

\*See dealer for complete warranty information.

Tilling depth depends on conditions & fluffiness of tilled area.

Color Options:



### RTA35 SERIES:

## Ready to tackle the tough stuff.

The RTA35 Series is Land Pride's toughest tiller, built to withstand the rigors of commercial jobs. The 35 Series Tiller is designed to go all day, day after day, in the most demanding jobs. With a 19" rotor swing diameter, this tiller can turn over a bunch of dirt without much getting in its way and is ideal for landscaping, nurseries, and commercial gardening applications.



### Adjustable Lower Hitch

With a 76" working width, and adjustable lower hitch clevises, taking out your tire track is usually achievable. This allows for less overlap needed, meaning less time in the tractor seat.



## Save time with reverse rotation.

Ground cover in your way? No problem for a Reverse Tine Tiller. It turns it up, chops it a time or two, and buries it under a cascade of large clods, which are buried under small clods. Large clods fall first, and they just get smaller as they pile on top of each other. What's left on top is a perfect seedbed to foster your wild imagination!



Sifting tines help "sift" the tilled material. Large or clumpy material fall first, with the top layer being a perfect consistency for planting.



Rear deflector removed for photo.

- Spring-loaded rear deflector levels the freshly tilled seedbed
- Hinged front flap with rubber insert helps prevent damage to deck from debris coming over the top of the tines
- Skid shoe on drive side has additional chain case protection

	RTR2570
Horsepower	25-55 HP
Hitch	Cat. 1
Width-Endplate to Endplate (cm)	70" (178)
Overall Width	76" (193)
Weight - lb (kg)	868 (394)
Number of Flanges	9
No. of Blades Per Flange	6 C-Shape
Blade Spacing	7-7/8"
Max. Tilling Depth	7"
Skid Shoe Settings	7
Offset	Up to 5"
Number of Sifting Tines	46
Rotor Swing Diameter	17"
Rotor Shaft Speed	220 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 3 Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 High Tensile in Oil Bath
Sprockets	Hardened Teeth, Splined Center

\*See dealer for complete warranty information.

Tilling depth depends on conditions & fluffiness of tilled area.

Color Options:



The reverse rotation of the tiller tines forces the tiller in the ground, preventing "walking" on hard ground. Once it's in, it stays put!





## SMALL SEEDS ATTACHMENT -

Utilizes a smaller version of the fluted seed cup to accurately meter tiny seeds like alfalfa, clover, and wildflowers.



## Small Drills, Big Features.

The 3P500 Min-Till Drill is designed to get into places big drills simply can't; like wooded areas, orchards, and vineyards. These excel when seeding into fully prepared and minimum tillage plots. Add the optional small seeds box and plant two different seeds at the same time. The 3P500V offers a low profile box, ideal for orchards and vineyards.

	3P500, 3P500V
Hitch	3-Pt, Cat. 1 & 2
Primary Design	Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	9 - 6" spacing, 7 - 7-1/2" spacing
HP Requirements (min)	35 HP
Weight - lbs (kg)	1,200* (544), 1,100* (499)
Working Width	5'
Width	5'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure	90-180 lbs
Main Box Capacity	10 bu. (8.5 bu. Vineyard)
Small Seed Box	1.2 bu.

## 00 SERIES



Color: 

The 3P500V offers a low profile box, ideal for orchards and vineyards.



## Gets Into Places Big Drills Simply Can't.

The 3P600 Min-Till Drill features a highly visible seed level indicator, extremely accurate fluted seed cups, V-bottom inserts on the inside of the seedbox that allow all the seed to be metered, and water tight lids that stay open for filling. This model is ideal for wooded areas.

The rugged 00 Series openers provide accurate and consistent seed placement. Openers have 7" of stagger to allow residue to easily flow through the unit. Inside the opener our full length seed tube gently guides the seed all the way to the bottom of the trench and a seed flap makes sure the seed stays in the trench. The trailing press wheels maintain proper opener depth, close the seed trench, and firm the seed into the soil. T-handles quickly adjust the press wheels and allow for small incremental changes in planting depth.



00 SERIES



Choice of 2x13 Single Press Wheels or 3x13 Center Rib Press Wheels

	3P600
Hitch	3-Pt., Cat. 1 & 2
Primary Design	Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	11 - 6" spacing, 9 - 7-1/2" spacing
HP Requirements (min)	40 HP
Weight - lbs (kg)	1,500* (680)
Working Width	6'
Width	6'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.



Color: 



## Mounted Versatility.

3P606NT models are 3-point mounted no-till drills, allowing you to get close to field edges and with our proven ground drive no remote hydraulics are needed.

This is a heavy duty no-till drill loaded with features like 450 lbs. pre-loaded coulters, a calibration crank, ground driven metering system, rain tight seed box lids, and a double disk no-till opener. The rugged 6' seeder is ideal for limited space situations and maneuvering among trees and other obstacles. The lead coulters have 4" stagger to aid in residue flow and prepare a mini-seedbed for the 06 series openers to plant into.

All 3P606NT models come standard with a fluted feed box. Add a native grass box for seeding fluffy native grass mixes that include seeds like big and little bluestem and smooth brome. You can further increase your options by adding a small seeds box; a smaller version of our standard fluted feed box used for clover and alfalfa. Add both and seed 3 different types of seed and rates, all at the same time!



5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance



	3P606NT
Hitch	3-Pt, Cat. 2
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	9
HP Requirements (min)	60 HP
Weight - lbs (kg)	2,280* (1,034)
Working Width	6'
Width	6'
Transport Length	Varies by Tractor
Transport Clearance	Varies by Tractor
Transport Height	Varies by Tractor
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.
Native Grass Box	6 bu.

Color: 



## End Wheel Efficiency.

The 6' Pull-type No-Till Drill (606NT) features an end wheel design that reduces side-loading on openers when operated on contours and curves, eliminating premature opener wear.

With the optional native grass and small seeds box this machine is quite capable in pasture renovations and food plot seeding. Other features like heavy duty coulters, calibration crank, central grease bank, lock-out hubs for transport, and optional weight brackets create a system designed for long-term dependability and productivity in a broad range of seeding applications.

	606NT
Hitch	Pull-Type
Primary Design	End Wheel No-Till
Row Spacings	7-1/2"
Number of Openers	9
Tire Size	7.00-15LT
HP Requirements (min)	40 HP
Weight - lbs (kg)	2,700* (1,124)
Working Width	6'
Width	8'6"
Transport Length	11'5"
Transport Clearance	14"
Transport Height	5'1"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.
Native Grass Box	6 bu.



Color: 



06 SERIES

**5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance**



Color: 

**4-SPEED GEARBOXES** - Provides increased accuracy and flexibility of the metering system by giving the operator more choices for drive speed.



**WIDE SEED CUPS** - Exclusive fluted seed cup delivers outstanding accuracy; delivering the rate you choose, evenly and gently.



	800
Hitch	Pull-Type
Primary Design	End Wheel Min-Till
Row Spacings	6", 7-1/2"
Number of Openers	15 - 6" spacing, 12 - 7-1/2" spacing
Tire Size	700-15LT
HP Requirements (min)	45 HP
Weight - lbs (kg)	2,379* (1,079)
Working Width	7'6"
Width	9'8-1/2"
Transport Length	12'
Transport Clearance	9"
Transport Height	5'4"
Opener Series	00 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Main Box Capacity	16 bu.
Small Seed Box	2 bu.

## Big Performance in a Small Package.

This 8' Min-Till Drill (800) uses the field proven 00 series opener to properly place seed. This rugged opener utilizes 13-1/2" 4mm thick disk blades, full length seed tube and an 18 position T-handle press wheel to precisely control seed depth. Changing the 5-position, centrally located opener down pressure adjustment is quick and easy, ensuring the correct down pressure regardless of the conditions.

Other features include a 1-3/4" fluted feed metering system. It utilizes a 4-speed gear box and adjustable gate opening to accurately set a wide variety of planting rates for crops from alfalfa to peas. You may also add a dry fertilizer and/or a small seeds attachment to tailor the drill to your needs.

Other features include a lock-out hub to free wheel the drive system during transport. Safety lighting, electronic acre meter, lift cylinder with hoses, calibration crank, "V" bottom dividers for easy clean out, and folding tongue are all standard equipment. An optional seed box agitator is available.

Color:



**DIGITAL ACREMETERS -**  
LED readout of current acres on machine. Unique design conserves battery power.



**SAFETY LIGHTS -**  
LED lights provide high visibility and safety during transport.



**LOCK OUT HUBS -**  
Disengages all drive components for transport reducing wear and tear.

**00 SERIES**



Choice of 2x13 Single Press heels or 3x13 Center Rib Press Wheels



## Narrow Transport.


Our double disk configuration and full length seed tube ensures that the seed is placed consistently at the depth chosen. Additional seed tubes are used to place both native grass and small seeds. This allows three seeds to be planted at separate rates at the same time. Depth control is handled by the 18 position T-handle press wheel adjustment.

The main seed box is a fluted feed design. The seeding rate is set with the four speed transmission and the adjustable gate opening. The optional native grass box uses our proven "picker wheel" to meter the seed. Rates are adjusted by varying the speed of the drive. Lastly, the optional small seeds attachment is a smaller version of our fluted feed system, and seeding rates are set by changing the width of the fluted feed. The ground drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.

Options also include: dry fertilizer, native grass, small seeds, seed box agitator, and dual seed.



	3P806NT
Hitch	Semi-Mount
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	13
Tire Size	265/70B 16.5
HP Requirements (min)	80 HP
Weight - lbs (kg)	4,350* (1,973)
Working Width	8'
Width	8'2"
Transport Length	12'1" w/lift assist
Transport Clearance	Varies by Tractor
Transport Height	7'8"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	16 bu.
Small Seed Box	1.92 bu.
Native Grass Box	8 bu.
Fertilizer	8 bu.
2nd Main Box	8 bu.

Color: 

*3P806NT Model Shown With  
Optional Native Grass and  
Small Seeds Boxes*



**V-BOTTOM DIVIDERS** - Allows seed to feed from seed box to feeder cup for complete emptying.



**GREASE BANK** - Installed on No-Till machines, so you can service all coulters in centralized locations.



**5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance**



	3P1006NT
Hitch	Semi-Mount
Primary Design	No-Till
Row Spacings	7-1/2"
Number of Openers	15
Tire Size	265/70B 16.5
HP Requirements (min)	100 HP
Weight - lbs (kg)	5,460* (2,476)
Working Width	10'
Width	9'8"
Transport Length	13'3" w/lift assist
Transport Clearance	Varies by Tractor
Transport Height	7'8"
Opener Series	06 Series
Opener Travel	6.5"
Opener Depth Range	0-3.5"
Opener Down Pressure - lbs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - lbs	450
Main Box Capacity	20 bu.
Small Seed Box	2.40 bu.
Native Grass Box	10 bu.
Fertilizer	10 bu.
2nd Main Box	10 bu.

Color:



3P1006NT Model Shown  
With Optional Native Grass  
and Small Seed Boxes



3 BOX 3 SEED 3 RATE  
3 3 3

**MULTIPLE BOX COMBINATIONS** - Start with the standard 2 bu. per ft. main seed box, then add either a 2nd seed box for dual seed, a dry fertilizer box, or a native grass box. Additionally you can add a small seeds box to the main box or add it to the dual seed/fertilizer/native grass box choice.

## 10ft Narrow Semi-Mounted.

The 3P1006NT model is the big brother to the 8' - 3P806NT. At 10' seeding and 10' transport this machine is productive yet can easily get in pasture gates, over bridges, and transport down narrow roads. 2-point mounting and dual hydraulic lift assist wheels in the rear give the drill excellent ground clearance as well.

Non-swiveling coulters allow the 3P1006NT to stay on side hills without drifting. Competitive models use swiveling coulters that tend to run downhill. Two smaller pneumatic tires in front gauge depth for the coulters, as well as, drive the metering systems on the drill.

With the main seed box only the drill weighs 4350 lbs., so it has the weight needed to penetrate tough no-till surfaces. If even more weight is needed an optional weight bracket can be installed to get excellent penetration in the toughest ground.



06 SERIES

**5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance**



# 706NT & 1006NT NO-TILL COMPACT DRILLS

HP  
55-75 Min.

HITCH  
Pull-Type



Land Pride's 706NT and 1006NT End Wheel No-Till Drills are ideal for seeding in a wide variety of applications from pasture renovation to utility reclamation or food plots to food production. They are a great combination between the productivity of a large drill and the versatility of a compact one.

Both models feature large end wheels designed for unmatched ground gauging in rugged terrain. In addition, the in-line end wheels minimize side loading on contours and hills, dramatically extending the life of the no-till openers. Our 706NT comes standard with a 17-bushel main seed box, the 1006NT is 25-bushel. You can also add a small seeds box and either a native grass box or a fertilizer box.

These drills also include a 6-position hitch that adjusts to your tractor's hitch height to keep the drill level in planting position. Furthermore, with its high clearance and end wheel design, the 706NT and 1006NT can go virtually anywhere your tractor can pull it, without gouging or bottoming out.

	706NT	1006NT
Horsepower	55 HP Minimum	75 HP Minimum
Hitch	Pull-Type, Pintle or Clevis	
Working Width	7'	10'
Width	9' 10"	12' 7"
Length	13' 10"	13' 10"
Height	6' 7"	6' 7"
Ground Clearance	13.5"	13.5"
Weight*	3,900 lbs	4,500 lbs
Seedbox Capacity - Main	17.5 bu.	25 bu.
Small Seeds Box	1.7 bu.	2.4 bu.
Native Grass Box	7 bu.	10 bu.
Fertilizer Box	6.5 cu./ft.	9.2 cu./ft.
Row Spacing	7.5"	7.5"
Number of Openers	10	15
Tires	9.00 x 24, 8-ply	9.00 x 24, 8-ply
Opener Travel	6.5"	6.5"
Opener Depth Range	0 - 3.5"	0 - 3.5"
Opener Down Pressure	90 - 180 lbs	90 - 180 lbs
Coulters	5/8" Turbo or 3/16" Fluted	5/8" Turbo or 3/16" Fluted
Acre Meter	Digital, Optional	




Color:







Easily disengage drive sprockets with Land Pride's patent-pending Lock-Out Clutch on all boxes.



Front rollers feature 1/2" x 2" spikes that break through thatch and crust to prep the soil for seeding.



Mud scrapers on the rear packer roller keep soil from compacting on roller in damp conditions.



The NTS uses exclusive Great Plains fluted seed cups to deliver outstanding metering accuracy.



Optional native grass box uses agitators to keep the seed flowing toward the picker wheel.

	NTS2507	NTS2509	NTS2511
<b>Horsepower</b>	3-Point: 70 HP Pull-Type: 60 HP	3-Point: 90 HP Pull-Type: 80 HP	3-Point: 110 HP Pull-Type: 100 HP
<b>Hitch</b>	3-Point, Cat II or Pull-Type with transport wheels		
<b>Working Width</b>	7'	9'	11'
<b>Length 3-pt (Pull-type)</b>	57" (133")		
<b>Height</b>	42"		
<b>Weight 3-pt (Pull-type) lbs</b>	1,878 (2,787)	2,165 (3,124)	2,674 (3,882)
<b>Seedbox Capacity - Main</b>	7.5 bu.	8.8 bu.	11.3 bu.
<b>Small Seeds Box</b>	1.7 bu.	2.0 bu.	2.6 bu.
<b>Native Grass Box</b>	8.5 bu.	9.8 bu.	12.7 bu.
<b>Output</b>	Varies by seed, Drop spread		
<b>Front Rollers</b>	8-5/8" Diameter, 1-1/4" Spindles with Greasable Ball Bearings		
<b>Front Roller Angle</b>	Up to 18 Degrees		
<b>Front Roller Spikes</b>	1/2" x 2", Heat-Treated Steel, Replaceable		
<b>Rear Packer Roller</b>	11-3/8" Diameter, Cast and Notched Gray Iron Rings		
<b>Chains</b>	#40 Series Chain		
<b>Seed Cups - Main Box and Small Seed Box (each box)</b>	12	14	18
<b>Acremeter</b>	Digital, Optional		



Color: 

The new NTS25 No-Till Seeder incorporates 30 years of experience in designing and manufacturing seeding equipment to deliver a durable, high-quality tool that will exceed your expectations. Whether employed to restore a pasture, reclaim a right-of-way, overseed a ball field, or plant a new yard, you know that Land Pride's NTS25 will deliver the results you've come to expect from a seeder leader.

## The seeder that does it all.

While seeding into a freshly prepared site, the front angling rollers help cut through the top crust, kicking up a light amount of soil, making sure the ground is soft. The seed is then dropped and compressed by the rear roller. Establishing this initial seed to soil contact is essential in achieving a high rate of germination.



### The many uses for the APS:

- Bare dirt seeding
- Turf overseeding
- Wildlife Conservation Seeding

### OVERSEEDING OR NEW SEEDING

The All-Purpose Seeder is ground driven with no driveline and related drivetrain components to maintain. By adjusting the front two rollers, you can control how aggressive you want to be in the area you are seeding or overseeding.

Optional small seeds box.



	APS1548	APS1560	APS1572	APS1586
<b>Horsepower</b>	25-80 HP			
<b>Hitch</b>	Cat. 1			Cat. 1 & 2
<b>Working Width (cm)</b>	50" (127)	60" (152)	72" (183)	86" (218)
<b>Overall Width</b>	60"	72"	81"	98"
<b>Overall Length</b>	49"	51"	52"	55-1/2"
<b>Overall Height</b>	42-1/2"			
<b>Weight - lb (kg)</b>	547 (248)	702 (318)	836 (379)	1070 (485)
<b>Seedbox Capacity</b>	4	5	6	7.2 Bushel
<b>Output Range</b>	Varies By Seed Variety; Consult Manual			
<b>Front Roller - 2</b>	8" Diameter, 1" Spindles w/Greaseable Ball Bearings			
<b>Rear Roller</b>	8" Diameter w/Studs or 12" Cast Packer Wheels			
<b>Chain</b>	#40 with Spring Loaded Idler			
<b>Seed Cups</b>	7	8	10	12
<b>Front Roller Angling</b>	Up to 20°			
<b>Roller Studs</b>	1/2" to 2" Heat Treated Steel, Replaceable			

\*60" and 86" models with rear cast packer wheels

Color Options:



### Rear Rollers

Choose between a rear spiked roller or a 12" cast packer wheel roller.



## Renovate turf or establish a new lawn with an OS15.




The optional small seeds box allows two seeds to be metered at one time into the same seed tube for even distribution.

	OS1548	OS1572
Horsepower	25-60 HP	30-60 HP
Hitch	Cat. 1	
Working Width (broadcast) (cm)	51" (129)	72" (183)
Overall Width (w/gauge wheels)	77-3/4"	99"
Overall Width (w/rear roller drive)	60-1/8"	81-1/4"
Overall Length	52-7/16"	
Weight - lb (kg) (gauge whl drive)	1290 (585)	1645 (746)
Knives - 5 per flange	Standard or Curved 115 on 2"; 80 on 3" Standard or Curved 170 on 2"; 115 on 3"	
Rotor	18" Diameter	
Productivity (3-1/2 mph)	1.5 Acres/hr (broadcast) 2 Acres/hr (broadcast)	
Depth Adjustment	0" - 1-1/2"	
Blade Spacing	2" or 3"	
Gearbox	540 RPM Cast Iron Housing	
Seedbox	4 or 6 Bushel; Paddle Agitator	
Small Seedbox Capacity	.95 or 1.36 Bushel	
Seed Cups & Drive	7 or 10 Seed Cups; Powder Metal Flutes with Individual Cleanout Handles, RH Gauge Wheel Drive or Rear Roller Drive	
Packer Wheels	12" Cast Iron with Corrugated Scraper	
Roller Chain	#80 or #100, Adjustable, Fully Enclosed in Oil Bath	
Driveline	Fully Shielded, Heavy-Duty, Cat. 3 Slip Clutch Std	
Gauge Wheels	18" x 8.50" x 8" Turf Tires-4 ply	
Slit-Seeder Weight - lb	2" Knife Spacing = 38 3" Knife Spacing = 36	2" Knife Spacing = 56 3" Knife Spacing = 54



Color Options:

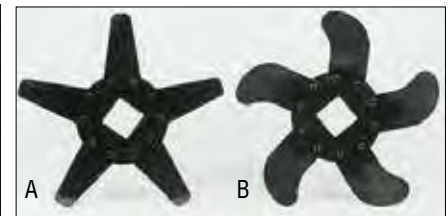

### Choice of Knives

(A) Straight, aggressive 3/16" thick knives prepare the soil by pulling up thatch, while (B) 10 gauge curved knives provide a minimum of surface disturbance.

\*See dealer for complete warranty information.



## Precise metering and seed-to-soil contact.

The PS1572 Primary Seeder is perfect for the hometown landscaper to do lawns, community parks and areas between the curb and sidewalk. They also perform better than larger models in areas where light moguls, undulations, and depressions exist.



	PS1572
Horsepower	25-50 HP
Hitch	Cat. 1
Working Width (cm)	70-1/2" (179)
Overall Width	79-1/8"
Overall Length	29-3/4"
Overall Height	39"
Weight - lb (3-Pt) (kg)	1165 (528)
Seedbox Construction	16 Gauge Front & Rear, 10 Gauge Endplates
Seedbox Capacity	6 Bushel
Output Range	Varies By Seed Variety; Consult Manual
Front Roller	29 Rings - 12" Diameter 1-1/2" Spindles w/ Sealed Ball Bearings
Rear Roller	30 Rings - 9-1/2" Diameter
Roller Spindles	1-1/2" Front, 1" Rear w/Greaseable Bearings
Chain	#40 with Spring Loaded Idler
Seed Cups	10 Each
Track Removers	2 Each

Color Options:



(Cover removed for photo.)

Various seeding rates can be obtained by turning the dual sprocket over. The easy drive system assures a consistent flow of seed. The rear roller is spring loaded to keep in constant contact with the ground, promoting healthy "seed-to-soil" contact.

"Precision seeding" is accomplished using proven fluted metering cups (shown here). Each flute grabs just the right amount of seed for even distribution. Millions of cups are in use for a variety of crops around the world.





## Pull-Type salt, seed, sand, or top dressing spreader.

- Easily disengage spinner for transport
- Adjustment link for various hitch heights
- Two hopper sizes
- Hopper cover available to protect material
- 2" Ball hitch
- Ground driven



	PTS500	PTS700
<b>Hitch</b>	Pull-Type, 2" Ball Hitch Ground Driven	
<b>Delivery</b>	Spin-Type Broadcast	
<b>Hopper</b>	One Piece, Seamless Polyethylene	
<b>Dry Weight (kg)</b>	165 (75)	176 (80)
<b>Frame</b>	Heavy-Duty Tubular	
<b>Vanes and Spinner</b>	Stainless Steel	
<b>Adjustment Levers</b>	Plated	
<b>Loading Height</b>	54" Average	
<b>Max. Spreading Width</b>	39-46 ft.	
<b>Hopper Capacity - lb (kg)</b>	350 (158)	563 (255)
<b>Pattern Settings</b>	Three	
<b>Overall Width</b>	41"	
<b>Wheel Size</b>	16 x 6.5-8	
<b>Acres Covered</b>	7-15 Acres per Hour (depending on slide opening)	

## Pendulum Spreaders offer a more consistent spread.

	PFS4000	PFS5060	PFS8010
<b>Hitch</b>	Cat. 1	Cat. 1 & 2	Cat. 2
<b>Capacity</b>	925 lbs	1150 - *1390 lbs	2040 - *3000 lbs
<b>Delivery</b>	Pendulum-Type		
<b>Hopper</b>	One Piece, Seamless Fiberglass		Cone shape, polyethylene
<b>Frame</b>	Heavy-Duty Tubular		
<b>Driveline</b>	Shielded		
<b>Spreading Width</b>	20 - 46 Ft.		
<b>Gearbox</b>	1-3/8" Shaft		
<b>Adjustment Levers</b>	Plated		
<b>Discharge Opening</b>	Manual, Optional Hydraulic		N/A
<b>Additional Agitation</b>	Optional		N/A

\*Optional top extensions needed for this capacity

### Various Spouts Available

- Broadcast (Standard)
- Banding (Wide)
- Banding (Narrow)
- Narrow Broadcast
- PTO Driven



Pendulum Spreaders offer a more consistent spread and delivery than broadcast spreaders.





## Spreading made fast and easy with weatherproof hopper.

- Spin-type broadcast for even spreading
- One piece seamless Polyethylene hopper
- Adjustable delivery patterns
- Vinyl cover option to keep the elements out
- PTO Driven

### COMPARE TO OTHERS!

#### Stainless Steel Parts

Spinner Plate

Spinner Vanes


Hopper Doors, Hardware  
and Adjustment Handle

Featuring an all-steel frame, frontal splash plate and three available hopper sizes, Land Pride Broadcast Spreaders fit most landscape, nursery, hobby farm, sod farm and municipality uses.

	FSP500	FSP700	FSP1000
Min. Horsepower	15 HP	18 HP	20 HP
Hitch	Cat. 1		
Capacity (kg)	350 lbs. (158.7) 5.85 cu.ft.	563 lbs. (255) 9.38 cu.ft.	673 lbs. (305) 11.22 cu.ft.
Overall Dimensions	37.2" x 40.4"	44" x 46"	46.8" x 46.8"
Loading Height	3'	3' 4"	3' 9"
Weight - empty - lb (kg)	119 (54)	128 (58)	139 (63)
Net Spreadable Granular Width	23' - 54'		
Transmission Ratio	1:1		
Range of Spreading Possibility - lb/acres	44 - 890		



A built in tow hook handles up to 1200 pounds; just right for hauling extra sacks of fertilizer or seed.

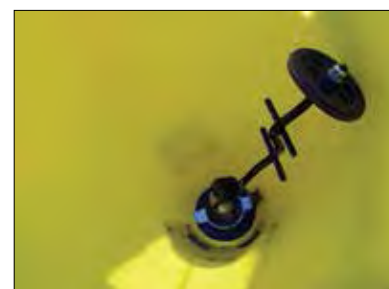

Our agitator is standard equipment and is useful when spreading powder type materials that tend to bridge.



Land Pride's 'seeding package' is a unique blend of products that work well by themselves, and compliment each other when used together with a Land Pride Disc Harrow. This package is ideal for large grassy areas, reclamation sites, or wild game food plots.

- **Seed Bed Roller** – this is an excellent finishing tool with applications from roadside use to landscaping. The SBR will break up clumps and dirt clods while pressing seed into the soil for seed to soil contact.
- **Electric Spin Spreader** – our Spin Spreader is easily calculated for a host of seed types, many of which we have put into a seed calculation chart for you. Electrically turn on and off from your tractor or vehicle seat.
- **Drag Harrow** – our Drag Harrow has light, medium and aggressive applications, simply by turning the harrow in different positions. Perfect for dragging a sports field or smoothing out recently cultivated ground.



SBR72 w/Optional Pull Hitch

## SEED BED ROLLER

	SBR72
Horsepower	18-52 HP
Hitch	Cat. 1 & Cat. 1 QH
Working Width (cm)	69" (175)
Weight - lb (kg)	442 (200) 3-Pt
Optional Pull Hitch	Easily Pivots for Ball or Clevis Hook-up
Roller Diameter	11-3/8"
Roller Material	Notched Gray Iron
Scraper	Profiled Roller Scraper
Tires	Transport Tires on Pull-Type
Stand	Hitch Support Stand
Options	Easily Converts from Pull-Type to 3-Point

Color Options:



SBR72 3-Point (Base Model)

## DRAG HARROWS

	DRG04	DRG06	DRG08
Min. HP	8 HP	12 HP	16 HP
Hitch	2 Log Chains with Pull Ring		
Working Width (cm)	4' (122)	6' (183)	8' (244)
Weight - lb (kg)	89 (40)	138 (63)	185 (84)
Tine Diameter	1/2"		
Construction	High Carbon Steel Tine Construction		

- Can be flipped over for a more aggressive action

Color:

## ELECTRIC SPIN SPREADER

Volume/Capacity	2 cu. ft. Spin Spreader
Construction	Poly Hopper w/ Water Tight Poly Press Fit Lid
Spread Pattern	20 to 25 ft. Wide w/o Deflector
Remote Control	Remote Tether Control

Color:



Seed Bed Roller, Disc Harrow, Electric Spin Spreader, and Drag Harrow are all available individually.



## Affordability for food plots.

The Plot Ranger is an ideal tool for planting food plots by the avid hunter or the ultimate animal lover and is sized right to work behind a sub-compact to compact tractor, your ATV, UTV, or even your hunting truck.



Spreader is available for quick mounting to your Utility Vehicle or your Disc Harrow.

	FPS48
Hitch	Pull-Type
Disc Cutting Width (cm)	40" - 50" (102 - 127)
Overall Width	54"
Height	52"
Length	104"
Weight - lb (kg) w/Spin Spreader & Packer	510 (231)
Weight Load on Each Disc	46 lbs
Number of Disc Blades	8
Disc Blade Size & Type	16" Notched
Blade Spacing	7-1/2"
Transport / Gauging Tires	13" Diameter 4 Ply Tubeless
Bearing Hanger	3/8" Plate
Bearing Type, 2 per Gang	Self Aligning, Sealed Bearing
Gang Tube	3" x 2"
Gang Axle	1" Square High Carbon Steel
Disc Angle	Front Gang: 0°, 7°, 14° & 21° Rear Gang: 0°, 7°, 14° & 21°
Frame Construction	2" x 2" Square Tubular Design
Lifting Device	Electric Actuator, 12 Volt or Ratchet Jack
Rear Axle Pivot	Greaseable
Packer Roller Width	40-7/16"
Packer Roller Bearing	Greaseable
Spreading Device	Spin Spreader, 12V, Electrically Operated
Spreader Hopper Loading Ht.	42" Off Ground
Spreader Hopper Vol./Cap.	2 cu. ft. (15 gal.) (100 lbs. Maximum Capacity Weight)
Spin Spreader Deflector	Diverts Seed to Smaller Spreading Width
Small Seed Restrictor	Restricts Small Seed for Smaller Distribution Levels

Color Options:



- Roller/packer raises above spreader for transport
- Seed deflector controls spreading width



**Ideal for light duty maintenance and landscaping.**



Land Pride's economical RB05, RB15, and RB16 Series Rear Blades are an excellent and economical choice for leveling, grading, finishing, and backfilling. They are the perfect companion for your sub-compact or compact tractor.

The multitude of forward and reverse working angles, moldboard offset capability, as well as tilt on the RB16, allows the operator to work right up next to retaining walls, abutments and raised curbing. They are excellent for snow removal in the pulling or push blade mode. A retractable parking stand is included to accommodate easier blade removal, storage and remount capabilities.


	RB0548	RB0560	RB1560	RB1572	RB1584	RB1660	RB1672	RB1684
<b>Horsepower</b>	17-25 HP		17-40 HP			20-40 HP		
<b>Hitch</b>	Cat. 1		Cat. 1			Cat. 1		
<b>Working Width (cm)</b>	48" (122)	60" (152)	60" (152)	72" (183)	84" (213)	60" (152)	72" (183)	84" (213)
<b>Approx. Weight - lb (kg)</b>	128 (58)	143 (65)	248 (112)	269 (122)	289 (131)	283 (128)	297 (134)	319 (145)
<b>Angling</b>	5 Fwd / 5 Rev Up to 30° Right or Left		7 Fwd Up to 45°; 5 Rev Up to 30°			7 Fwd Up to 45°; 3 Rev Up to 30°		
<b>Tilt</b>	N/A		N/A			5 Positions; Up to 15° Left or Right		
<b>Offset</b>	10" Left or Right		12" Left or Right			12" Left or Right		
<b>Moldboard Height</b>	13-1/2"		14"			14"		
<b>Moldboard Thickness</b>	1/4"		1/4"			1/4"		
<b>Cutting Edge</b>	3/8" x 3", Replaceable, Heat Treated		1/2" x 6"; Reversible & Replaceable, Heat Treated			1/2" x 6", Reversible & Replaceable; Heat Treated		
<b>Options</b>	N/A		Skid Shoes			Skid Shoes, Hydraulic Angling		

Color Options:



## Everyday blades; Dirt, Snow, Farm, Landscape – About as versatile as it gets!

The Land Pride RB26 and RB37 Series Rear Blades offer 3-way positioning (blade angle, blade tilt, and blade offset) and are an excellent choice for leveling, grading, or backfilling. They excel in snow removal in either the pulling or push blade mode. Their offset and tilt capability make them an excellent choice for construction and maintenance of drainage ditches, waterways, soil contours, and for maintaining silage pit operations. Optional hydraulic angling kits are available for both models.

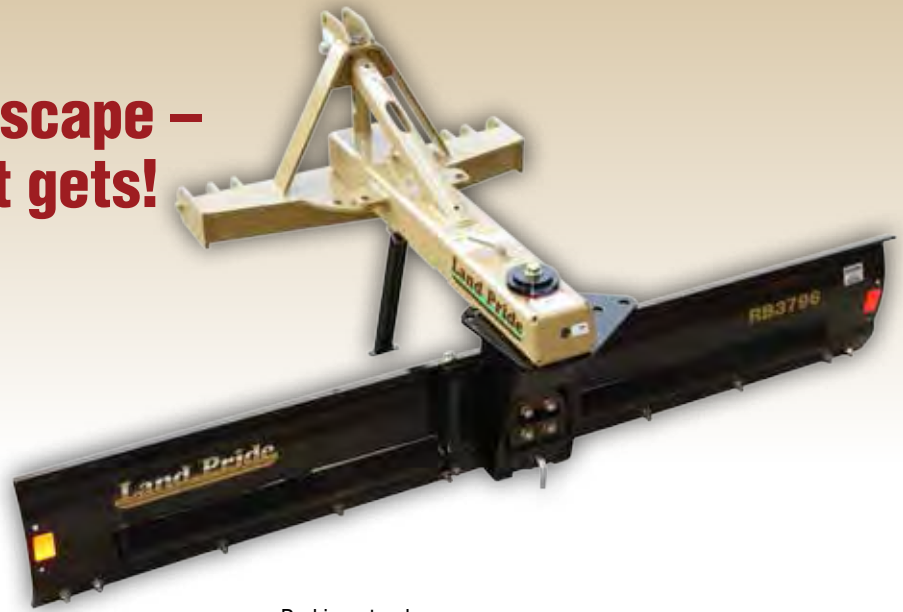

- Parking stand
- Optional side plates and skid shoes
- Optional hydraulic angle kit
- Cat. 1 or 2



- Parking stand
- Second top link hole for additional lifting leverage
- Optional side plates and skid shoes
- Optional hydraulic angle kit

	RB2672	RB2684	RB2696	RB3772	RB3784	RB3796
<b>Horsepower</b>	25-60 HP			35-80 HP		
<b>Hitch</b>	Cat. 1			Cat. 1 & 2 Combination		
<b>Working Width (cm)</b>	72" (183)	84" (213)	96" (244)	72" (183)	84" (213)	96" (244)
<b>Weight - lb (kg)</b>	369 (167)	396 (180)	425 (193)	595 (270)	630 (286)	665 (302)
<b>Angling</b>	7 Fwd. Up to 45°; 3 Rev. Up to 60°			7 Fwd. Up to 45°; 3 Rev. Up to 30°		
<b>Tilt</b>	5 Positions; Up to 15° Left or Right, 30° Total			7 Positions; Up to 22.5° Left or Right, 45° Total		
<b>Offset</b>	12"			26" Left or Right		
<b>Moldboard Height</b>	17-1/2"			17"		
<b>Moldboard Thickness</b>	5/16"			5/16"		
<b>Kingpin</b>	3-1/2" Tube			2-1/2" Solid Shaft		
<b>Cutting Edge</b>	1/2" x 6", Reversible & Replaceable; Heat Treated			1/2" x 6", Reversible & Replaceable; Heat Treated		
<b>Options</b>	Side Plates, Skid Shoes, Hydraulic Angling			Side Plates, Skid Shoes Hydraulic Angling		

Color Options:





## The perfect all-around blade.

Our RBT35 Series Blade is just right for use in landscape, construction, farming or snow removal. Looked upon as the perfect all-around blade, the RBT35 Series is offered with optional hydraulic function for Tilt, Offset and Angle.

- All hydraulic
- The optional cushion valve can help protect the cylinders in the event an obstruction is hit
- The optional rear gauge wheel can turn your blade into an excellent grading tool

**Make changes  
On The Go**  
with our 3-Way  
Hydraulic  
Rear Blades



	RBT3584	RBT3596
Horsepower	2WD: 35-80 HP 4WD: Up to 65 HP	
Hitch	Cat. 1 & 2	
Working Width (cm)	84" (213)	96" (244)
Weight - lb (kg)	709 (322)	745 (338)
Maximum G.V.W. - lb (kg)	9500 (4318)	
Blade Angle	9 Positions (Manual): Up to 50° Fwd & Rev (Hydraulic)	
Tilt	Up to 20°	
Tilt Cylinder	2" x 6" x 1-1/4"	
Swing Offset	Up to 30° Left and Right	
Offset Cylinder	3-1/2" x 14" x 1-1/4"	
Moldboard Height	17"	
Moldboard Thickness	5/16" with 3/16" Tapered Reinforcement Channel	
Cutting Edge	1/2" x 6", Reversible & Replaceable; Heat Treated	
Options	Skid Shoes, End Plates Gauge Wheel, Double Selector Valve, Cushion Valve	

Color Options:



## Our larger blades are excellent farm blades, from barns to pastures to fields . . . our blades can do it all!

Land Pride's RBT40 Series 3-Way Hydraulic Rear Blades are built tough from the ground up for applications ranging from landscaping, construction, snow removal, and feedlot cleaning. Designed to handle tractors up to 100 HP, this blade is also ideal for ditching, road grading and all-around farm use. By using optional hydraulics at all three positions, changes to angle, tilt, and offset can be made while on the go. Optional skid shoes and side plates are available for more precise results.



Skid shoes and end plates are ideal tools for large grading jobs or snow removal.



**Make changes  
On The Go**  
with our 3-Way  
Hydraulic  
Rear Blades

	RBT4096	RBT40108
<b>Horsepower</b>	2WD: 65-100 HP 4WD: Up to 75 HP	
<b>Hitch</b>	Cat. 1 & 2	
<b>Working Width (cm)</b>	96" (244)	108" (274)
<b>Weight - lb (kg)</b>	848 (385)	898 (407)
<b>Maximum G.V.W. - lb (kg)</b>	9500 (4318)	
<b>Blade Angle</b>	15 Positions (Manual): Forward and Reverse, Up to 45°	
<b>Angle Cylinder</b>	3-1/2" x 16" x 1-1/4"	
<b>Tilt</b>	Up to 15°	
<b>Tilt Cylinder</b>	3" x 6" x 1-1/4"	
<b>Swing Offset</b>	Up to 30° Left and Right	
<b>Offset Cylinder</b>	3-1/2" x 16" x 1-1/4"	
<b>Moldboard Height</b>	17"	
<b>Moldboard Thickness</b>	5/16" with 1/4" Tapered Reinforcement Channel	
<b>Cutting Edge</b>	1/2" x 6", Reversible & Replaceable; Heat Treated	
<b>Options</b>	Skid Shoes, Side Plates, Hydraulic Cushion Valve Double Selector Valve	



Color Options:





## Built tough...where it really counts.



Optional cushion valve protects cylinders and blade components during extreme impacts. For use on RBT40 & 45 Models.



Optional single or dual gauge wheels add accuracy and simplify grading operations.

**Make changes  
On The Go**  
with our 3-Way  
Hydraulic  
Rear Blades

	RBT4596	RBT45108	RBT55120
Horsepower	70-125 HP		90-180 HP
Hitch	Cat. 2 & 3		Cat. 2 & 3
Working Width (cm)	96" (244)	108" (274)	120" (304)
Weight - lb (kg)	1130 (513)	1166 (529)	1,753 (795)
Maximum G.V.W. - lb (kg)	9,500 (4309)		15,000 (6818)
Blade Angle	Fwd & Rev Up to 45°		Fwd & Rev Up to 45°
Angle Cylinder	4" x 16"		4-1/2" x 16" x 2"
Tilt	Up to 15°		Up to 30°
Tilt Cylinder	3" x 6" x 1-1/4"		3" x 8" x 1-1/4"
Swing Offset	Up to 35° Left and Right		33°
Offset Cylinder	4" x 16"		4-1/2" x 16" x 2"
Moldboard Height	19"		19"
Moldboard Thickness	5/16" with 1/4" Boxed Reinforcement		5/16" with 1/4" Boxed Reinforcement
Cutting Edge	1/2" x 6", Reversible & Replaceable; Heat Treated		1/2" x 6", Reversible & Replaceable; Heat Treated
Options	Skid Shoes, End Plates, Single or Dual Gauge Wheel, Cushion Valve, Double Selector Valve		Skid Shoes, End Plates, Hardened Wear Plates, Hydraulic Single Gauge Wheel, Hydraulic Dual Gauge Wheel, Double Selector Valve

Color Options:



Shown with optional end plates.

RBT45 & 55 pivot weldment features a 1" thick plate steel turntable, 3/4" thick tilt pivot bushing and a 4" solid kingpin.



**1/2" Thick moldboard...  
this blade can tackle most  
jobs thrown its way!**



Rear blades don't come any tougher than Land Pride's RBT45, RBT55, and RBT60 Series 3-Way Rear Blades. They are built tough to handle leveling, finish grading, and backfilling applications involving roadwork, construction, landscaping, nurseries, drainage ditches, feedlot cleaning, farm use, and snow removal.


The 19" tall rolled moldboards can be hydraulically angled left or right up to 45°, the ends can be tilted up or down by as much as 15°, and the whole blade can be offset to the left or right. The blade can also be rotated 180° for blading in reverse with the same angling, tilting, and offset capabilities. Available accessories include gauge wheels for good depth control, end plates for holding material, and skid shoes for blade protection.

	RBT6010	RBT6012
<b>Horsepower</b>	2 WD: 225 HP 4 WD: 200 HP	2 WD: 175 HP 4 WD: 160 HP
<b>Hitch</b>	Cat. 2 & 3	
<b>Working Width (cm)</b>	10' (304)	12' (366)
<b>Weight - lb (kg)</b>	2,442 (1108)	2,582 (1172)
<b>Blade Angles</b>	Up to 45°, Fwd. & Rev. 5" x 18" Cylinder	
<b>Offset</b>	Up to 55° Left & Right 5" x 18" Cylinder	
<b>Tilt</b>	Up to 15°, 3-1/2" x 8" Cylinder	
<b>Moldboard Height</b>	19"	
<b>Moldboard Thickness</b>	1/2" Thick w/Reinforcement Channel	
<b>Kingpin</b>	4-1/2" Solid Steel Bar	
<b>Cutting Edge</b>	1/2" x 6", Reversible & Replaceable; Heat Treated	

\* Quick Hitch cannot be used with optional gauge wheels.



- Hydraulic adjustments with cylinders & hoses
- Hydraulic tip storage
- Main frame: fully welded formed box
- Retractable parking stand
- Options: gauge wheels, end panels, skid shoes

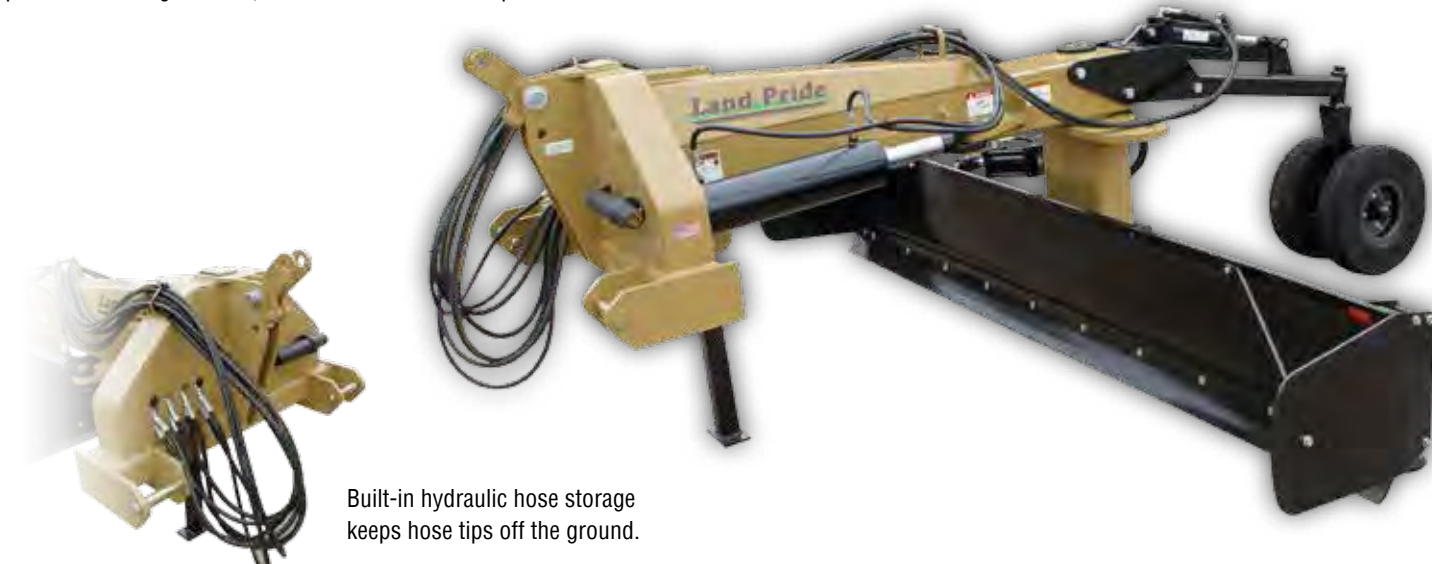

Built-in hydraulic hose storage keeps hose tips off the ground.



## The essential tool for landscapers.

As America's premier supplier of Landscape Rakes, Land Pride offers light-duty through construction-grade models. Designed for raking rocks, dirt, sand, landscaping and construction debris, our rakes are the landscaper's perfect tool to clean and prepare a site for seeding as well as general maintenance around farms, parks and beaches.



LR1696



LR0560



	LR0548	LR0560	LR1660	LR1672	LR1684	LR1696
<b>Horsepower</b>	15-20 HP		20-40 HP			
<b>Hitch</b>	Cat. 1		Cat. 1			
<b>Working Width (cm)</b>	48" (122)	60" (152)	60" (152)	72" (183)	84" (213)	96" (244)
<b>Angle/Position</b>	5 Forward Up to 30°		7 Forward Up to 45°			
<b>No. of Teeth</b>	26	34	30	36	42	48
<b>Teeth Spacing</b>	1-3/4" Centers		2" Centers			
<b>Teeth Material</b>	High Carbon Spring Steel		High Carbon Spring Steel			
<b>Tooth Size</b>	1/4" x 3/4"		5/16" x 1"			
<b>Rake Height</b>	12"		16-1/2"			
<b>Weight - lb (kg)</b>	98 (44)	113 (51)	241 (109)	270 (122)	291 (132)	316 (143)
<b>Options</b>	N/A		Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6" Flip-Down Grader Blade (Must be Used in conjunction with Dual Gauge Wheels)			






LR3796

**A versatile tool for landscapers, cities, parks, and other recreational areas.**

**Heavier grades for heavier jobs. Spread rock, gather pine needles, or prepare a seedbed.**

The LR26 and LR37 Series Landscape Rakes are ideal for spreading rock, moving debris, preparing seed beds, and reshaping soil and/or aggregate profile. The LR26 is designed for tractors up to 60 HP and features a quick-hitch compatible Cat. 1 Hitch and can be ordered with an optional hydraulic angling kit, while the LR37 is designed for tractors up to 80 HP with Cat. 1 or 2 hitch and is also quick-hitch compatible. Available accessories include single or dual gauge wheels and flip down grader blades.

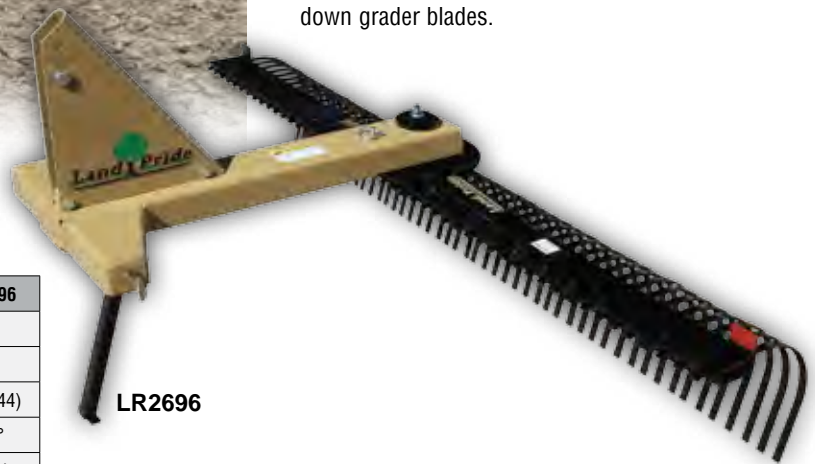

LR2696

	LR2684	LR2696	LR3784	LR3796
<b>Horsepower</b>	25-60 HP		30-80 HP	
<b>Hitch</b>	Cat. 1		Cat. 1 or 2	
<b>Working Width (cm)</b>	84" (213)	96" (244)	84" (213)	96" (244)
<b>Angle/Position</b>	7 Forward Up to 45°		5 Forward Up to 30°	
<b>Offset</b>	N/A	N/A	45° Swing, 24" Offset Manual or Hydraulic	
<b>No. of Teeth</b>	42	48	42	48
<b>Teeth Spacing</b>	2" Centers		2" Centers	
<b>Teeth Material</b>	High Carbon Spring Steel		High Carbon Spring Steel	
<b>Tooth Size</b>	5/16" x 1"		5/16" x 1"	
<b>Rake Height</b>	16-1/2"		16-1/2"	
<b>Weight - lb (kg)</b>	330(150)	348 (158)	460 (209)	483 (219)
<b>Options</b>	Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6", Flip-Down Grader Blade, Hydraulic Angle Cylinder		Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6", Flip-Down Grader Blade	

Color Options:




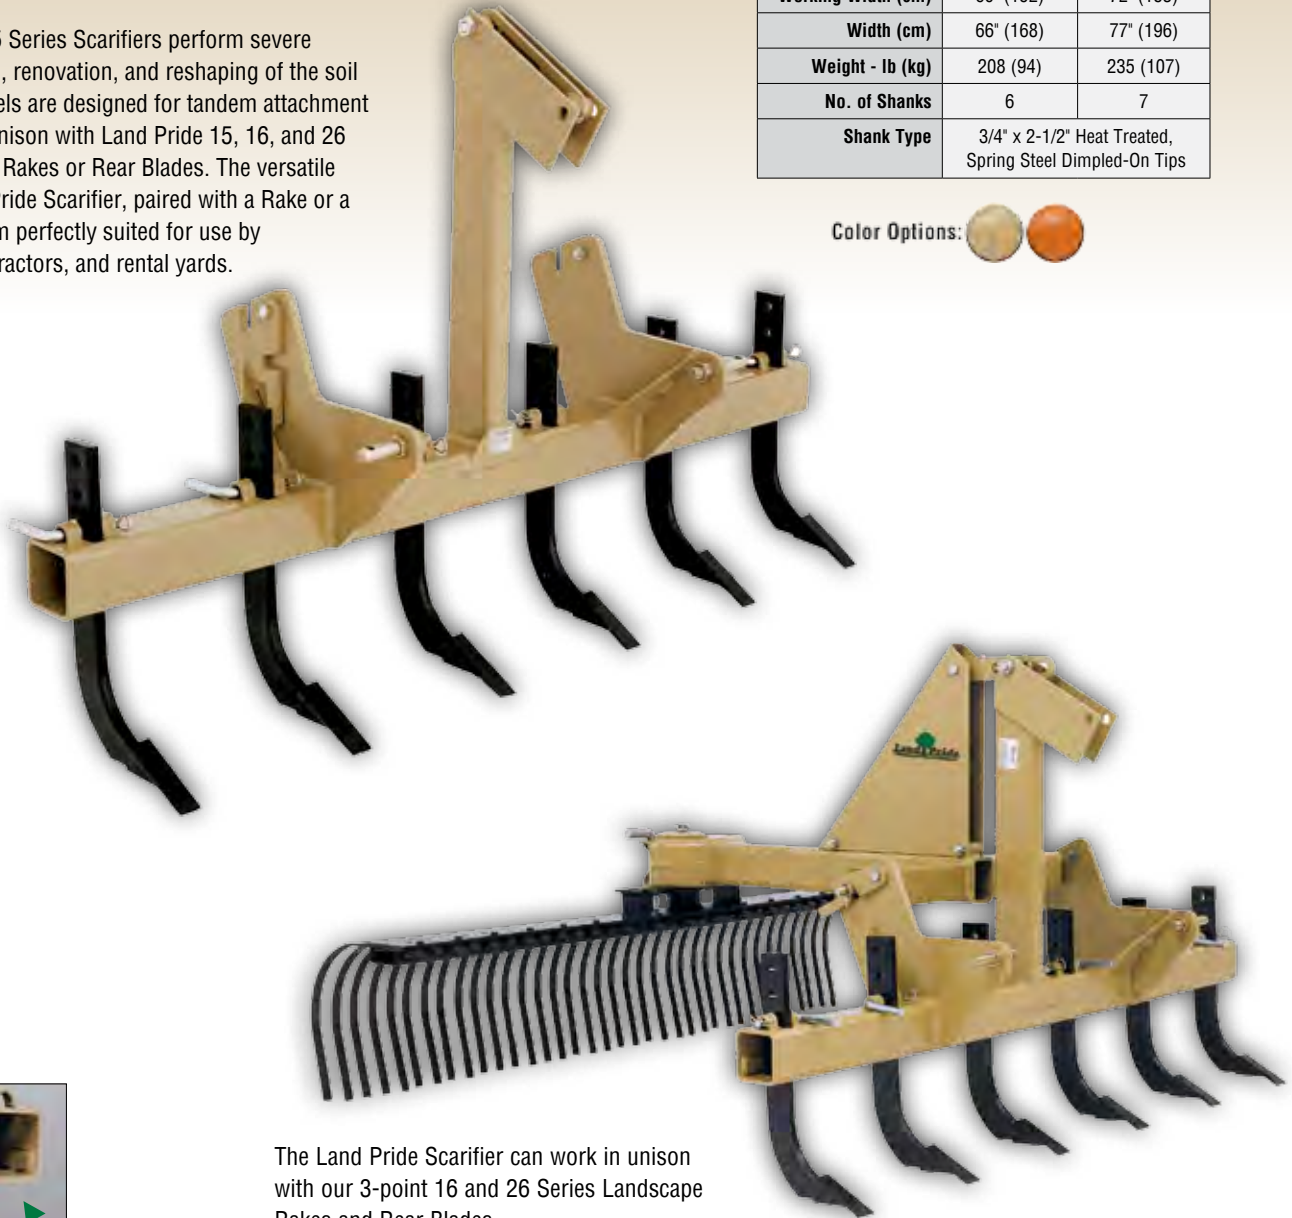


## Renovate and reshape.

Land Pride's SF25 Series Scarifiers perform severe ripping, loosening, renovation, and reshaping of the soil profile. Both models are designed for tandem attachment and will work in unison with Land Pride 15, 16, and 26 Series Landscape Rakes or Rear Blades. The versatile action of a Land Pride Scarifier, paired with a Rake or a Blade, makes them perfectly suited for use by landscapers, contractors, and rental yards.

	SF2566	SF2577
Horsepower	25-50 HP	
Hitch	Cat. 1	
Working Width (cm)	60" (152)	72" (183)
Width (cm)	66" (168)	77" (196)
Weight - lb (kg)	208 (94)	235 (107)
No. of Shanks	6	7
Shank Type	3/4" x 2-1/2" Heat Treated, Spring Steel Dimpled-On Tips	

Color Options: 



The Land Pride Scarifier can work in unison with our 3-point 16 and 26 Series Landscape Rakes and Rear Blades.



All Land Pride Scarifiers feature a 5/16" wall thickness on the shank tube for high tensile strength, and a 5/16" x 1" full length reinforcement bar.

## Productivity in a small package.

The Land Pride BB05 Series Fixed Bar Box Scrapers are designed for Category 0, 1, and 1 limited 3-point hitch for mounting to subcompact tractors. The Land Pride BB12 Series Box Scrapers are designed for Category 1, 3-point hitch or Quick-Hitch System mounting to tractors up to 30 HP. Both Box Scraper models are ideal for ripping, leveling, finish grading, and backfilling applications at small feedlots, outdoor arenas, building sites, and maintenance operations for small landowners. The manually adjustable ripping shanks and the fore and aft cutting blades make these units especially effective and productive for small projects.



### BB05 SERIES

- Forward and Reverse cutting edges
- Rolled moldboard
- Clevis hitch aids in hooking to tractor
- Heat treated shanks with replaceable tips

Color Options:



### BB12 SERIES

- Forward and Reverse cutting edges
- Formed moldboard
- Lower clevis hitch aids in hooking to tractor
- Heat treated shanks with replaceable tips



Color Options:

	BB0548	BB0554	BB1248	BB1254	BB1260	BB1266	BB1272
<b>Horsepower</b>	17-25 HP		17-30 HP				
<b>Hitch</b>	Cat. 0, 1 and 1 Limited		Cat. 1				
<b>Working Width (cm)</b>	48" (122)	54" (137)	48" (122)	54" (137)	60" (152)	66" (168)	72" (183)
<b>Height of Moldboard</b>	13-5/16"		15-3/8"				
<b>Side Panel Material</b>	3/16"		3/16" Thick by 16" High				
<b>Depth of Bucket</b>	18-1/2"		23-1/8"				
<b>Weight - lb (kg)</b>	277 (126)	298 (135)	316 (143)	325 (147)	346 (157)	370 (168)	404 (183)
<b>Number of Shanks</b>	4	4	4	4	4	5	6
<b>A-Frame Material</b>	3/8" x 2-1/2" Flat Bar		1/2" x 3"				
<b>Cutting Edges</b>	Two 3/8" x 3" High Carbon Heat Treated Blades, Reversible & Replaceable		Two 3/8" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable				




**Level, finish, grade,  
and backfill -  
all with one tool.**



DIRTWORKING

Land Pride's BB15 and BB25 Series Fixed Bar Box Scrapers are ideal for ripping, leveling, finish grading, and backfilling applications at feedlots, outdoor arenas, and construction sites, or for maintenance operations on lanes or roadways. Each model offers five different working widths to choose from. The roll-formed moldboard keeps materials flowing putting less drag on the Box Scraper, resulting in lower HP requirements and faster working conditions. The rear-mounted blade allows for backfilling trenches or along foundations.

	BB1560	BB1566	BB1572	BB2560	BB2566	BB2572	BB2584	BB2596
<b>Horsepower</b>	17-40 HP			25-55 HP				
<b>Hitch</b>	Cat. 1			Cat. 1				
<b>Working Width (cm)</b>	60" (152)	66" (168)	72" (183)	60" (152)	66" (167)	72" (182)	84" (213)	96" (244)
<b>Height of Moldboard</b>	17"			17"				
<b>Side Panel Material</b>	5/16"			3/8"				
<b>Depth of Bucket</b>	22"			22"				
<b>Overall Depth</b>	31-1/2"			31-1/2"				
<b>Overall Height</b>	35"			35"				
<b>Weight - lb (kg)</b>	428 (194)	450 (204)	504 (229)	471 (214)	500 (227)	549 (249)	593 (269)	658 (298)
<b>Number of Shanks</b>	4	5	6	5	5	7	7	8
<b>A-Frame Material</b>	1/2" x 3" Flat Bar			1/2" Plate				
<b>Cutting Edges</b>	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable			Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable				



Side panel gussets reinforce the structural integrity during extreme conditions.



Color Options:    

Color Options:  



## Ideal for construction sites and commercial operations.

The beefy 3/8" x 4" x 4" main-frame tube and 3/8" end panels makes our 35 Series Fixed Bar Box Scraper ideal for construction sites and commercial operations or for use by counties and municipalities. Two welded channel braces extend from front to rear of the box plus welded gussets between the side panels and 23" formed moldboard provide exceptional strength under heavy loads. The durable BB35 is comfortable dragging or back-filling.



	BB3578	BB3584	BB3596
<b>Horsepower</b>	45-110 HP		
<b>Hitch</b>	Cat. 1 & 2		
<b>Bucket Capacity - cu. ft. (cu. meter)</b>	30 (.85)	32 (.91)	37 (1.1)
<b>Working Width (cm)</b>	78" (198)	84" (213)	96" (244)
<b>Height of Moldboard</b>	23"		
<b>Side Panel Material</b>	3/8"		
<b>Depth of Bucket</b>	35"		
<b>Overall Depth</b>	44"		
<b>Overall Height</b>	35-1/2"		
<b>Weight - lb (kg)</b>	825 (374)	855 (388)	935 (424)
<b>Number of Shanks</b>	7	7	8
<b>A-Frame Material</b>	1/2"		
<b>Cutting Edges</b>	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable		

Color Options:  





## Choose from manual or hydraulic retractable box scrapers.



**MR1572**

Color Options:



The easy and convenient retractability of the scarifier shanks on the MR1572 and HR2572 makes them highly productive and ideal for ripping, leveling, finish grading, and backfilling applications at commercial feedlots, outdoor arenas, building sites, and maintenance operations on farm and ranch lanes or roadways or constructions sites.

The roll-formed moldboard keeps materials flowing which puts less drag on the Box Scraper, resulting in lower HP requirements and faster working conditions. Shanks on the MR15 are kept in the up or down position with a positive locking system, keeping the scarifier bar from bouncing in transport and tight during field use.

	MR1572	HR2572
<b>Horsepower</b>	2WD: 20-50 HP 4WD: 25-40 HP	30-60 HP
<b>Hitch</b>	Cat. 1	
<b>Working Width (cm)</b>	72" (183)	
<b>Height of Moldboard</b>	18-1/2"	20-1/2"
<b>Depth of Side Panels</b>	27-1/2"	34"
<b>Side Plate Material</b>	3/8"	
<b>Weight - lb (kg)</b>	615 (279)	851 (386)
<b>Number of Shanks</b>	7	
<b>Cutting Edges</b>	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable	

- Self locking down position
- Hydraulic raising and lowering of shanks on HR25
- 3 Position shank with replaceable tip
- Rigid backfill blade



**HR2572**

Color Options:



The hydraulic retractable ripping shanks on the HR25, in combination with the 21" double-thick moldboard design, make these units highly productive for construction projects.



## Hydraulic retractable box scrapers, available in highback or lowback.

The HR/HRL35 Series Retractable Box Scrapers meet dirt moving and soil contouring needs of landscapers, contractors, nurseries, sod growers, farmers, ranchers and municipalities. Soil contouring productivity is dramatically increased with utilization of the hydraulically controlled retractable scarifier.

The front blade mounted on the moldboard is ideal for soil redistribution and soil leveling. A second blade mounted on the hinged rear gate further enhances the ability of the Box Scraper to redistribute and level soil. Both the front and rear blades are replaceable and can be flipped over to extend blade life. The HR/HRL35 is used for finishing and fine grading when the hinged rear gate is bolted in place. Unbolt the rear gate and the unit's front blade will penetrate deeper into the soil. Place the tractor in reverse and the rear blade can be used to backfill.



	HRL3578 Lowback	HR3584 Highback
<b>Horsepower</b>	40-65 HP	
<b>Hitch</b>	Cat. 1 & 2	
<b>Working Width (cm)</b>	78" (198)	84" (213)
<b>Height of Moldboard</b>	17"	23"
<b>Depth of Side Panels</b>	30"	
<b>Side Plate Material</b>	1/2"	
<b>Overall Depth</b>	43-1/2"	
<b>Capacity Cu. Ft.</b>	26	31
<b>Weight - lb (kg)</b>	981 (445)	1119 (508)
<b>Number of Shanks</b>	8	
<b>Cutting Edges</b>	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable	

Color Options:



- Raise and lower shanks hydraulically
- Hardened bushings in upper and lower hitch
- Floating or fixed rear gate
- Heat treated spring steel shanks





## A low cost alternative for road grading applications.

The GS15 Series Grading Scrapers are ideal for landscaping, small farms and ranches, hunting camps, large estates, small acreages, and sod farms. The GS25 Series are ideal for renovating gravel driveways and roads, leveling construction and turf sites, and cleaning barns and chicken coups.

Unlike a box scraper, they are not designed to transfer large volumes of dirt from one location to another and as a result do not require the additional horsepower that a box scraper requires. Nor does it require the tending of tractor 3-point lift controls to maintain grade that a box scraper might also require. Simply setting a properly adjusted GS15 or GS25 Series Grading Scraper on the ground and driving forward enables the operator to grade off high spots and fill in ruts and low spots on unimproved roads and lanes with little or no manipulation of the tractors 3-point hitch controls. Unlike a rear blade, they require no adjustment of blade angling or offset positions.

The GS15 and GS25 Series Grading Scrapers simply and quickly move dirt or aggregate from high spots to low spots making them extra user-friendly and a low cost alternative for road grading applications.



Rear cutting blades available as an accessory.



Color Options:




	GS1548	GS1560	GS1572	GS2572	GS2584	GS2596
Horsepower	20-50 HP	25-50 HP		40-90 HP		
Hitch	Cat. 1			Cat. 1 & 2		
Working Width (cm)	48" (122)	60" (152)	72" (184)	72" (183)	84" (213)	96" (244)
Side Panel Thickness	3/16" Thick with 2-3/4" Formed Edges			1/4" Thick with 2-3/4" formed edges		
Front Main Beam & Scarifier Support	4" x 4" x 5/16" Reinforced Heavy Wall Tubing; 2" x 2" x 3/16" Heavy Wall Tubing			4" x 4" x 5/16" Reinforced Heavy Wall Tubing; 3" x 3" x 3/16" Heavy Wall Tubing		
Skid Shoe Dimensions	3/8" Thick x 2-3/4" Wide x 44" Long			3/8" Thick x 2-3/4" Wide x 50-1/4" Long		
Scarifier Shank Construction	Heat Treated 4-Position Shank with Dimpled-on Hardened Tips					
Cutting Edges	Two 1/2" x 6" High Carbon Heat Treated Blades; Reversible & Replaceable					
Cutting Edge Adjustment	Infinite Vertical Adjustment from Level Grade to 1-1/2" Below Grade					
Weight - lb (kg)	437 (198)	511 (232)	594 (269)	728 (330)	796 (361)	864 (392)



## Reshape country roads, waterways and terraces.

Land Pride BB45 Series Pull-Type Drag Scrapers are ideal for moving large quantities of material, leveling, and finish grading. Material can be transferred by dragging it to nearby locations and raising the scraper to deposit the load. Surfaces can be graded and leveled by scraping material from high areas and allowing accumulated material to flow under the grader blade in to lower areas.

	BB4596	BB4510	BB4512
Horsepower	70-130 HP		
Hitch	Pull-type		
Working Widths (cm)	96" (245)	10' (305)	12' (366)
Clevis	Swivel Ball, Clevis or Swivel Clevis		
Tongue	Removable		
Capacity	1-3/4 cu.yd	2-1/4 cu.yd	2-3/4 cu.yd
Dump Clearance	21"		
End Plates	3/8"		
Moldboard	1/4"		
Cutting Edge	1/2" x 6"		
Axle	Fixed or Tilt		
Tilt Cylinder	3" x 8"		
Tilt Angle	3-1/2 Degrees, 7"	3-1/2 Degrees, Approx. 8"	
Tires & Rim	15" Implement Recap; 5 Bolt, 4.5" Rim		
Light Kit	Dual, Optional		

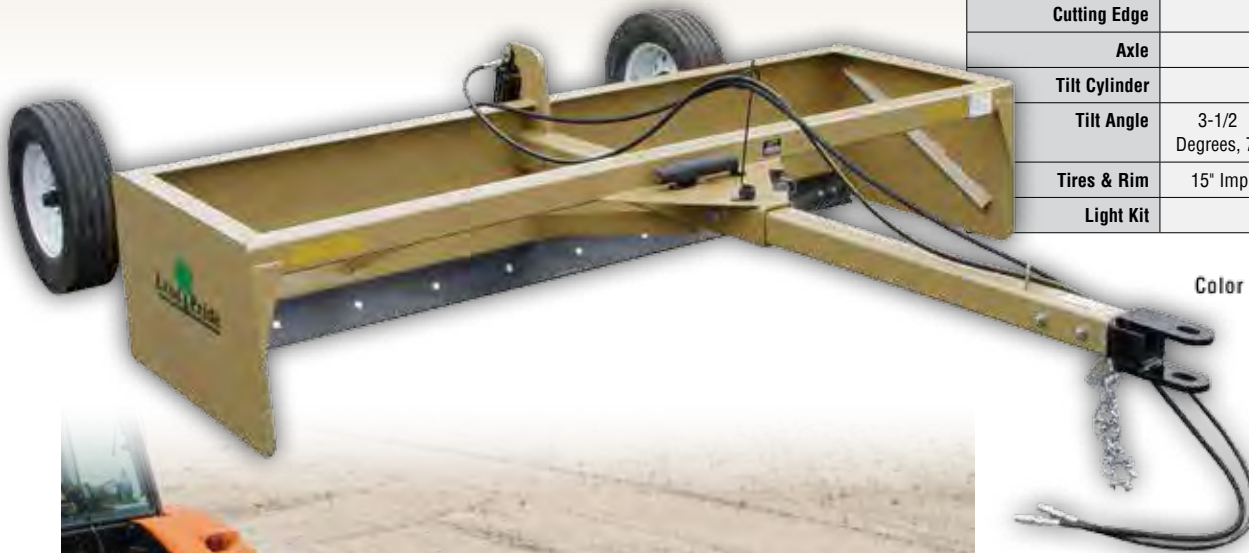

Color Options:



Vertical gussets for superior strength under side loads.

Choose the tilt axle option for shaping slopes, terracing or ditching. The tilt cylinder will raise one side of the drag scraper approximately 8" (7" on BB4596).

- 4" x 4" Square tubing main beam and tongue
- 5" Maximum cutting depth can load the bucket quickly
- Optional tilt allows deep angle cuts in one pass
- Optional weight tray can be filled with 760 lbs. of concrete for additional weight when scraping and moving material



## Perfect for garden tractors, zero turn mowers and utility vehicles.

DIRTWORKING

- Optional tailwheels are easily flipped for road or field use.
- Material tray allows for additional weight for better penetration.



Additional weight not included.



Expanded metal weight tray holds additional weight for better penetration, and also allows rain and debris to fall through (CA15 only).

	CA0540	CA0548	CA0556	CA1548	CA1556	CA1564	CA1572
Hitch	Pull-Type			Cat. 0, 1, 1 Ltd.			
Working Width (cm)	36" (91)	44" (112)	52" (132)	41" (104)	50" (127)	58" (147)	66" (168)
Overall Width (cm) (w/Wheels)	50" (127)	58" (147)	66" (168)	48" (123)	56" (142)	64" (163)	72" (183)
Overall Length	38-7/8" (48" w/wheels)			24-7/8"			
Spoon Material	1/2" Hardened Steel			1/2" Hardened Steel			
Spoon Spacing (Fwd Travel)	8-1/2"			6"			
Spoon Penetration	3"			3" - 4-1/2"			
Support Stand	N/A			3 Each			
Gang Assembly	Greaseable			Greaseable			
Transport Wheels	2 Optional			N/A			
Plug Size	1/2"			1/2"			

Color Options:





Optional Water Tanks shown for additional weight to aid in spoon penetration.

- 60" Tanks add up to 490 lbs.
- 72" Tanks add up to 600 lbs.



The 3/4" spoon is beveled to easily penetrate the ground and create a nice clean hole.

	CA2560	CA2572
<b>Hitch</b>	Cat. 1	
<b>Working Width (cm)</b>	60" (152)	72" (183)
<b>Weight - lb (kg) (w/o added weight)</b>	464 (210)	480 (218)
<b>Number of Spoons</b>	96	
<b>Spoons</b>	Replaceable 3/4" closed, case hardened	
<b>Spoon Spacing-In</b>	7" - Forward Travel	
<b>Gang Spacing</b>	5-1/2"	6-1/2"
<b>Number of Gangs</b>	12	
<b>Water Tank Capacity (Gallons per tank)</b>	29	36
<b>Full Water Tank Wt. - lb (kg)</b>	490 (222)	600 (272)
<b>Plug Size</b>	3/4"	

Color Options:



## CR25 SERIES STRAW CRIMPER

### Keep soil and seed where you put it.

If heat, erosion, or run-off is a problem, crimping straw into the ground needs to be the final step in grass seeding.



	CR2572
<b>Hitch</b>	Cat. 1
<b>Working Width (cm)</b>	69" (175.3)
<b>Overall Width (cm)</b>	80" (203)
<b>Weight - lb (kg)</b>	475 (215)
<b>Height</b>	41"
<b>Number of Discs</b>	12
<b>Disc Spacing</b>	6-1/2"
<b>Flat, Notched Discs Disc Hubs</b>	Heat-treated Greaseable
<b>Cast Iron Hubs</b>	4 Bolt
<b>Storage Stands</b>	4, One in Each Corner
<b>Heavy Tubular Frame</b>	2-1/2" x 2-1/2" x 3/16"
<b>Optional</b>	Water Tanks for Additional Weight
<b>Water Tank Capacity</b>	36 Gallons per Tank
<b>Full Water Tank Weight</b>	600 lbs

Color Options:






## Food plots and small farms... just right for the Land Pride Disc Harrow.



The Land Pride DH10 Series Disc Harrow opens and breaks up the soil surface to help prepare the soil seedbed for planting. The forward gang has aggressive notched discs while the rear gang has a choice of notched or smooth discs to quickly break up and evenly redistribute the finely cultivated topsoil. The DH10 Series Disc Harrows have applications in homeowner landscaping, small nurseries, gardens, small hobby farms, wild game food plots, and medium-duty residential use.

Disc gangs on the DH15 Series can be ordered with smooth or notched arrays for lighter or more aggressive applications based on customer needs. The DH15 is at home in applications from commercial landscaping, nurseries, and large gardens to small farms and municipal

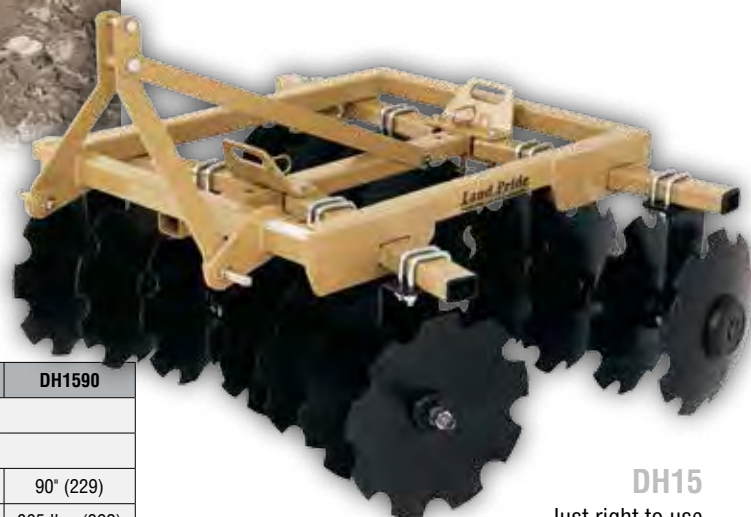

### DH15

Just right to use between tree rows or to fill in center-pivot irrigation tracks.


	DH1048	DH1060	DH1560	DH1572	DH1590
<b>Horsepower</b>	Max. 40 HP		Max 65 HP		
<b>Hitch</b>	Cat. 1		Cat. 1		
<b>Working Width (cm)</b>	48" (122)	60" (152)	60" (152)	72" (183)	90" (229)
<b>Weight (kg)</b>	420 (191)	549 (249)	628 lbs. (285)	714 lbs. (324)	865 lbs. (392)
<b>Disc Blade Size</b>	16"	16" or 18"	18" Diameter		
<b>Disc Type</b>	Notched or Smooth		Notched or Smooth		
<b>No. of Disc Blades</b>	12	16	16	20	24
<b>Disc Blade Spacing</b>	7-1/2"		7-1/2"		
<b>Bearing Hanger</b>	3/8" Plate, 5/8" U-bolt		3/8" Plate, 5/8" U-bolts		
<b>Bearing Type</b>	2 per Gang - Self Aligning, Sealed Bearings		2 per Gang - Self Aligning, Sealed Bearings		
<b>Angling</b>	0, 7, 14, 21 Degrees (60° w/Angling Adj Handle)		0, 7, 14, 21 Degrees w/Angling Adjustment Handle		
<b>Frame Tubes</b>	2" Square		2-1/2" Square		
<b>Gang Tubes</b>	3" x 1-1/2"		3" x 2"		
<b>Gang Axle</b>	1" Square, High Carbon Steel		1" Square, High Carbon Steel		
<b>Weight per Disc (kg)</b>	35 (16)	34 (16)	38 lbs. (17)	34 lbs. (15)	36 lbs. (16)
<b>Center Sweep Option</b>	N/A		9" Sweep		
<b>Disc Scrapers</b>	N/A		Optional, Adjustable		

Color Options:



## Not all Disc Harrows are created equal.

- Tubular frame instead of angle iron
- Self aligning, sealed ball bearings
- Thick plate steel bearing hangers
- Bearing hangers with 2 U-bolts
- Front and rear leveling
- Optional furrow fillers, disc scrapers, center sweep, SMV Kit, and Tongue Jack

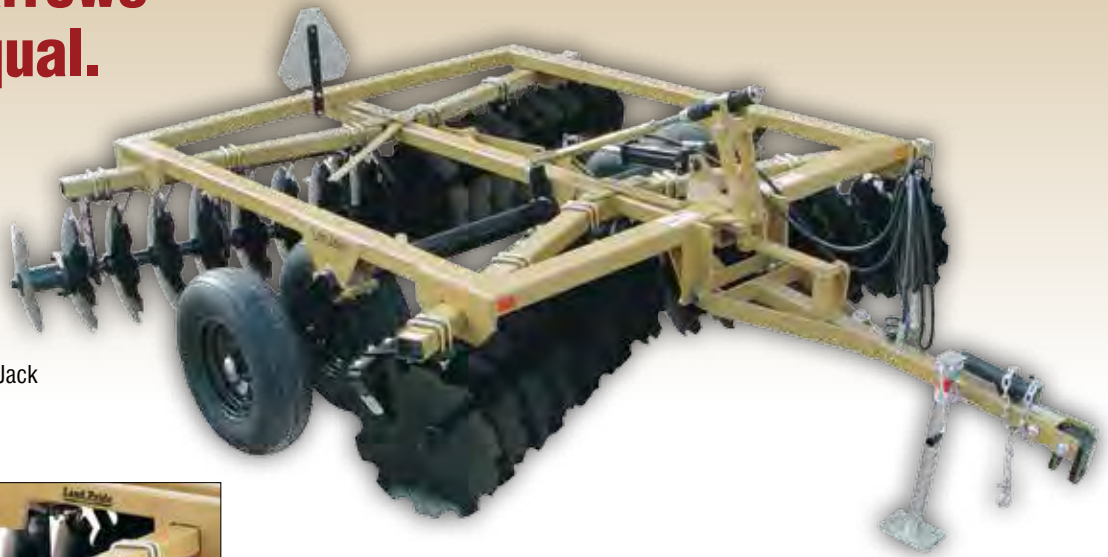

Disc scrapers are available to reduce build-up on discs.



### DH25

Heavy-duty 1/2" thick bearing hangers resist the high torque from two 5/8" U-bolts.



### DH35

Heavy-duty 5/8" thick bearing hangers resist the high torque from two 3/4" U-bolts.

	DH2572	DH2596	DH3510	DH3512
<b>Horsepower</b>	40-100 HP		45-100 HP	
<b>Hitch</b>	Cat. 1 & 2		Pull-type Hitch with Clevis	
<b>Working Width (cm)</b>	72" (183)	96" (244)	10'6" (320)	12' (366)
<b>Weight - lb (kg)</b>	947 (430)	1143 (518)	2491 (1130)	2747 (1246)
<b>Disc Blade Size</b>	20" or 22" Diameter		20" or 22" Diameter	
<b>No. of Disc Blades</b>	20	24	28 or 32	32 or 36
<b>Disc Blade Spacing</b>	7-1/2"		7-1/2" or 9"	
<b>Bearing Hanger</b>	1/2" Plate, 2 Each 5/8" U-bolts		5/8" Plate, 2 Each 3/4" U-bolts	
<b>Bearing Type</b>	Self Aligning, Sealed Bearings 2 per Gang		Self Aligning Bearings 3 to 4 Bearings per Gang	
<b>Front Gang Angling</b>	0, 7, 14, 21 Degrees		Front: 15, 18, 21 Degrees	
<b>Rear Gang Angling</b>	7, 14, 21 Degrees		12, 15, 18 Degrees	
<b>Frame Tubes</b>	3" Square		3" x 5"	
<b>Gang Tubes</b>	4" x 3"		3" x 5" x 1/4" Wall Tubing	
<b>Gang Axle</b>	1-1/8" Square, High Carbon Steel		1-1/8" Square, High Carbon Steel	
<b>Weight per Disc - lb (kg) 7-1/2" Spacing</b>	47 (21)	48 (22)	79-84 (36-38)	76-82 (34-37)
<b>Weight per Disc (kg) 9" Spacing</b>	51 (23)	52 (24)	87-93 (39-42)	81-86 (37-39)
<b>Transport Tires</b>	N/A		2 Std. 9.5Lx15, 4 Optional	
<b>Center Sweep Option</b>	9" Sweep		9" Sweep	
<b>Disc Scrapers</b>	Optional, Adjustable		Optional, Adjustable	



Color Options:





## Quickly create channels for small irrigation ditches.

The DT35 Ditcher features a standard 1" ripper shank, adjustable impeller head, and reversible/replaceable cutting edges. The DT35 quickly creates channels for small irrigation ditches and for efficiently diverting water from unwanted areas.



	DT35
<b>Horsepower</b>	30-60 HP
<b>Hitch</b>	Cat. 1 & 2, Quick-Hitch Adaptable
<b>Impeller</b>	4 Adjustable Blades with Replaceable Cutting Edges
<b>Impeller Settings</b>	16" Narrow Trench; 18" Wider & Deeper Trench
<b>Driveline</b>	Cat. 4 with Shearbolt
<b>Material Control Deflector</b>	Manual
<b>1" Ripper Shank</b>	Standard
<b>Drive Chain</b>	#80 Roller Chain Fully Enclosed in Oil Bath
<b>Chain Tightener</b>	Easily Accessible
<b>Storage Stands</b>	Standard
<b>Depth Controlling Skid Shoe</b>	Replaceable, 3/8" Thick

Color Options:



## A versatile tool to use in many water control applications.

Cleaning water ditches along roadsides or in farm fields to drain standing water away from crops, the DT55 Ditcher makes it simple. The 20" impeller leaves a clean and sculptured trough to keep water flowing freely from unwanted areas. With the Material Control Chute in place, dirt can be placed just next to the machine, or thrown many feet away to reshape terraces.



	DT55	DTM55
<b>Horsepower</b>	60-150 HP	
<b>Hitch</b>	Cat. 2 & 3	
<b>Tractor PTO</b>	540 rpm	1000 rpm
<b>Weight - lb (kg)</b>	900 (408) (w/o options)	
<b>Impeller</b>	20" Reinforced	
<b>Impeller Blades</b>	6 ea, 3/8" Thick Replaceable Hardened AR400 Material	
<b>Lubricated Chain Drive</b>	Double 80 Chain with Spring Loaded Idler	
<b>Input/Output Shafts</b>	2-1/4" ID Ball Type Bearings	
<b>Driveline</b>	Cat. 5 with Shear-Bolt	
<b>Material Control Chute (Optional)</b>	Manual or with 2" x 8" Hydraulic Cylinder & Hoses	
<b>Depth Control Wheel (Optional)</b>	16.5 x 6.50-8 Pneumatic Tire; Adjustable from Cutting Edge Height to 10" Below	
<b>Ripper Shank (Optional)</b>	3 Height Adjustments; Cutting Edge Depth to 5" Below	
<b>Skid Shoe (Optional)</b>	3/8" Thick, Replaceable	
<b>Parking Stands</b>	Dual Parking Stands for Storage Stability	

Color Options:  



Some early models not QH adaptable

### OPTIONS

- Rear skid shoe helps control depth
- Material chute puts dirt where you want it
- Ripper shank tears through hard packed soils moving smaller material into the impeller path
- Gauge wheel for depth control





## Fracture hardpan up to 23" deep.

Land Pride's heavy-duty 3-point RS15 and RS20 Ripper Shanks are tillage tools perfect for fracturing compacted hardpan. The single-shank RS15 and dual-shank RS20 are capable of ripping the soil up to 23" deep. Both models features high carbon 1.25" heat treated steel shank(s), heat-treated replaceable tips, shear pin protection, and a Cat 1 and 2 3-point hitch. The RS20 also features adjustable row spacing to be just right for your application.



RS15



	RS15	RS20
Horsepower	35-85 HP	70-110 HP
Hitch	Cat. 1 & 2 3-Point (Quick Hitch compatible)	
Width	40-5/8"	49"
Row Spacing	-	Up to 42"
Weight - lbs.	210	332
Number of Shanks	1	2
Ripping Depth	24"-27"	
Park Stand	Standard	

Color:



RS20



## Tackle seedbed prep, soil aeration and weed control; all in one tool

The new Land Pride FC10 is a single row 3-point Cat. 1 C-tine Field Cultivator for use by hobby farmers or gardeners. It features 6 spring steel C-tines, reversible and replaceable heat-treated tips, adjustable row spacing, and durable formed steel frame. Working width is 48" up to 57".

The Land Pride FC15 is a 3-point, 3-bar, 13-tine Field Cultivator that tackles a number of tasks in the field, including seedbed preparation, soil aeration, and weed control, just to name a few. The cultivator features 13 S-tines, or Danish tines, with reversible and replaceable tips, a Cat. 1 hitch, 2" x 2" square tube frame, adjustable tine spacing, and a 4" working depth. The FC15 also features bolt on extensions to expand the working width from 72" to 96", an industry exclusive! An available hitch allows you to pull Land Pride's DRG06 & DRG08 Drag Harrows.



FC15



FC10

	FC10	FC15
<b>Horsepower</b>	25-45 HP	up to 50 HP
<b>Hitch</b>	Cat. 1 Quick-Hitch compatible	
<b>Working Width</b>	48" up to 57"	72" Optional extensions create 96" working width; LP exclusive
<b>Working Depth</b>	4"	4"
<b>Frame Construction</b>	Formed steel angle	2x2 Square tubing
<b>Upper Support Brace</b>	Formed out of heavy plate	
<b>Tines</b>	C-tines Heat-treated 3/8" spring steel. Shanks can be adjusted 4-1/4" horizontally in 2-1/8" increments	S-tines, Heat-treated, 1/2" spring steel
<b>Tine Spacing</b>	Adjustable	
<b>Tine Tips</b>	Adjustable, reversible & replaceable	Reversible and heat-treated





## Ideal for initial cultivation of soil

Land Pride MP10 and MP20 Moldboard Plows are ideal for small acreage farms or large gardens. These plows are the ideal tool for initial cultivation of soil to prepare for planting or when deeper tillage – more than a field cultivator can provide – is required. Both models are equipped with replaceable 14" shares, shins, and landsides for easy maintenance. The MP10 and MP20 frames feature a 1" x 4" steel trailing arm and cross member, as well as a Cat. 1 3-point hitch.



MP20



MP10

The optional coultter allows for a smoother furrow edge and helps reduce slightly the drag on the moldboard.

	MP10	MP20
<b>Horsepower</b>	2 Wheel drive: 20 to 60 HP 4 Wheel drive: 20 to 50 HP	
<b>Hitch</b>	3-Point Cat. I	
<b>Cutting Width</b>	14"	27-1/2"
<b>Working Depth</b>	Max. 7" (depending on soil conditions)	
<b>Weight - lb (kg)</b>	294#	513#
<b>Construction</b>	1" x 4" Bolted Steel Frame	
<b>Park Jack</b>	Standard	N/A
<b>Number of Bottoms</b>	(1) 14" Bottom	(2) 14" Bottoms
<b>Plow Shank Shear Bolt</b>	7/16"-14 x 3" GR8 share bolt	
<b>Moldboard &amp; Shin Thickness</b>	5/16"	
<b>Frog &amp; Landslide Thickness</b>	1/2"	
<b>Coultter - Optional</b>	14" Diameter coultter with greasable 1-1/4" roller bearings	



## Designed with a twist to lift while fracturing the soil sideways.



Land Pride's AR25 Series pull-type Pasture Aerators are ideal in agricultural conservation tillage and pasture renovations. The heavy-duty, knife-like tines on the aerator are designed with a twist in them to break-up compacted soil horizontally and vertically as they slice into the ground in a twisting fashion. This breaking action conditions the soil to soak up run-off water faster, allow fertilizer to penetrate deeper into the ground, and increase oxygen and water supplies to the plant roots.



Cylinder stops storage area.



	AR2596	AR2510
Horsepower	40-90 HP	
Hitch	Pull-type	
Working Width (cm)	7'2" (218)	9'8" (295)
Overall Length	10'11"	
Clevis	Double Tang	
No. of Tines	48	64
Rotor Angle	2-1/2, 5, 7-1/2 Degrees, 2 Bolt Adjustment	
Tine Spacing	7-1/2"	
Bearings	Triple Lip Seal and Heavy Duty Bearing Hanger	
Tire Size	9.5Lx15-8 Ply	
Wheel Hub	6 bolt	
Optional Weights	Up to 3 - 740 lbs Each	Up to 4 - 740 lbs Each

Color Options:



- 8" Maximum tine penetration for aerating the soil
- 9" Forged & heat treated through steel tines are very resistant to wear and breakage giving them a long life
- Heavy duty rotary tine hangers are designed to stand up to the rigors of hard rocky soil
- Optional concrete weights help aerator tines penetrate the ground



## Two sizes: Perfect for DIY!



The PD10 and PD15 Series Post Hole Diggers are just right for 3-point attachment to Cat. 1 subcompact utility tractors. These units offer a 30" or 48" auger length and a choice of 6", 9", & 12" auger flights with cast steel fishtail tips for quick piloting and faster hole starting. Landscapers, rental yards, contractors, farmers, ranchers, and homeowner will find that the PD10 or the PD15 meets their general duty needs and applications.

### SUBCOMPACT TRACTORS

	PD10
Horsepower	15-30 HP
Hitch	Cat. 1
Yoke (cm)	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing
Output Shaft (cm)	2" (5.08)
Input RPM	540 Tractor at 300 RPM
Driveline	Category 2
Component Protection	Shear-Bolt
Max Auger RPM	96
Auger Length	30"
Auger Sizes	6", 9" or 12"
Fighting Thickness	1/4"
Options	Hydraulic Cylinder Down Pressure Kit (Applies approx. 500 lbs. of Force) <sup>^</sup> , Auger Alignment Handle, Storage Stand

See dealer for complete warranty information.

<sup>^</sup>May not work in some cab applications.

Color Options:



#### Storage Stand

Manhandling a Post Hole Digger by yourself is next to impossible. With our innovative Post Hole Digger stand, one person hook and unhook becomes a reality!

	PD15
Horsepower	20-40 HP
Hitch	Cat. 1
Yoke (cm)	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing
Output Shaft (cm)	2" (5.08)
Input RPM	540 Tractor at 300 RPM
Driveline	Category 2
Component Protection	Shear-Bolt
Max Auger RPM	94
Auger Length	48"
Auger Sizes	6", 9" or 12"
Fighting Thickness	1/4"
Options	Hydraulic Cylinder Down Pressure Kit (Applies approx. 500 lbs. of Force) <sup>^</sup> , Auger Alignment Handle, Storage Stand

<sup>\*</sup>See dealer for complete warranty information.

<sup>^</sup>May not work in some cab applications.

Color Options:





## Additional power for those tougher jobs.



Land Pride PD25 and PD35 Series Post Hole Diggers are a good fit for heavy-duty applications. Landscapers, contractors, ranchers, and other land owners will appreciate the rugged dependability and the quality construction – these PDs will take a beating and last for years. Both are designed for Category 1 or 2 three-point attachment, offer a 48" auger length, and a choice of 6", 9", 12", 15", 18" or 24" auger flights with cast steel fishtail tips.

	PD25	PD35
<b>Horsepower</b>	25-55 HP	30-75 HP
<b>Hitch</b>	Cat. 1 or 2	
<b>Yoke (cm)</b>	2-7/8" (7.30) Tubing	
<b>Boom (cm)</b>	3-1/2" (8.89) Reinforced Tubing	
<b>Output Shaft (cm)</b>	2" (5.08)	
<b>Input RPM</b>	540 Tractor at 300 RPM	
<b>Driveline</b>	Category 3	
<b>Component Protection</b>	Shear-Pin or Radial Pin^^	
<b>Max Auger RPM</b>	94/75	
<b>Auger Length</b>	48"	
<b>Auger Sizes^</b>	6", 9", 12", 15", 18" or 24"	
<b>Flighting Thickness</b>	1/4"	
<b>Options</b>	7" or 14" Auger Extension Hydraulic Cylinder Down Pressure Kit** (Applies approx. 500 lbs. of Force) Auger Alignment Handle, Storage Stand	

\*See dealer for complete warranty information.

^Radial Pin recommended on auger sizes of 15" and above.

^^May not work in some cab applications.

Color Options:



Cast steel teeth are replaceable, and positioned for maximum digging performance.



## The economical answer to your post hole needs.



### MOUNTING OPTIONS

The HD25 and HD35 Post Hole Diggers are available with a universal quick attach mount, a hydraulic driven, 3-point tractor mount, or a bucket mount.



Land Pride offers a variety of augers ranging from 6" - 24", with a 36" tree auger.

The HD25 and HD35 Series Post Hole Diggers are hydraulically driven and accommodate augers ranging from 6" to 24" in diameter. They are available with a universal quick attach mount, a bolt-on mount for mounting to the side of a bucket on a tractor front-end loader, or with a boom for mounting to a category 1 or 2 three-point hitch, and meet the heavy duty needs of nurseries, landscapers, contractors, construction companies, ranchers, and land managers. The HD35 will deliver up to 1,605 ft.lbs of torque when industrial-duty is preferred. You can also reverse the auger direction, easing the strain on the auger when extracting it from the ground. Available in HD25 or HD35 Series.

	HD25	HD35
<b>Hydraulic GPM Range</b>	5-12 GPM	10-25 GPM
<b>Hitch</b>	Cat. 1 or 2, or Front Loader Bucket Mount	
<b>Yoke (cm)</b>	2-7/8" (7.30) Tubing	
<b>Boom (cm)</b>	3-1/2" (8.89) Reinforced Tubing	
<b>Output Shaft (cm)</b>	2" (5.08)	
<b>Drive</b>	Hydraulic	
<b>Hydraulic Hose</b>	Standard on 3-Point; 2 Each 24' Length on Bucket Mount	
<b>Max Auger RPM</b>	101	93
<b>Auger Length</b>	48"	
<b>Auger Sizes^</b>	6", 9", 12", 15", 18" or 24"	
<b>Flighting Thickness</b>	1/4"	
<b>Options</b>	Hydraulic Cylinder Down Pressure Kit on 3-Point^^, 3-Pt Storage Stand 7" or 14" Auger Extension QA Mount w/8' or 24' Hoses	

\*See dealer for complete warranty information.

^Radial Pin recommended on auger sizes of 15" and above.

^^May not work in some cab applications.

3-Point

Color Options:



## Add versatility to your loader.



Land Pride's SA20 is a lighter planetary drive Post Hole Digger ideal for land owners, landscapers, hobby farmers, or contractors.

The SA20 digs holes from 9" to 36" in diameter and up to 48" deep or deeper with available auger extensions. With 10 different augers available - 7 double flight augers from 9" to 36" and 3 tree augers in 24", 30", and 36" sizes - the SA20 is a versatile and dependable tool.

	SA20
Hitch	Universal Quick-Attach
Output Shaft (cm)	2" (5.08) Hex
Weight - lb (kg)	162 (73)
Drive	Hydraulic
Hydraulic Requirements	6-30 gpm
Hydraulic Hose	Optional
Max Auger RPM	110
Auger Length	50-3/4" (9" is 49" length)
Auger Sizes	9", 12", 15", 18", 24", 30" or 36"
Tree Auger	24", 30" or 36"
Flighting Thickness	5/16"
Options	8' or 24' Hose, Flat Face Couplers, Skid/Loader Plate, 3 Motor Options, Auger Extensions

Land Pride's 36" auger is perfect for planting ball-rooted trees.



\*See dealer for complete warranty information.

Color: 





## The ideal tool for seedbed preparation.

Land Pride's PR16 Series Powered Rake is a multi-functional seed bed and soil surface preparation tool for landscapers and turf care professionals, capable of grading, leveling, shaping, cultivating, renovating, and pulverizing various types of soil surfaces. They are also capable of raking or windrowing soil, rocks, and construction site debris. The 60" or 72" working widths are a good choice for smaller landscaping and turf renovation jobs, while the 90" model is perfect for larger commercial jobs.



	PR1660	PR1672	PR1690
<b>Horsepower</b>	25-40 HP		35-75 HP
<b>Hitch</b>	Cat. 1		Cat. 1 or 2
<b>Working Width (cm)</b>	60" (152)	72" (183)	90" (228)
<b>Gearbox</b>	540 RPM, Ball Bearings, Cast Iron Housing, Drain Plug		
<b>Primary Driveline</b>	Cat. 4 Heavy-Duty		
<b>Secondary Driveline</b>	Cat. 4 with Slip-Clutch		
<b>Material Control Deflector</b>	1/2" x 5", Hard Urethane		
<b>Roller</b>	9-3/8" Diameter, w/ 3/4" x 1-1/2" Carbide Tipped Studs		
<b>Drive Chain</b>	#50 Double Continuous Roller Chain, High Tensile, Enclosed in Oil Bath		
<b>Angle Adjustment</b>	15° Left and Right - Hyd. or Manual		
<b>Angle Cylinder</b>	2" x 8"		
<b>End Plates</b>	Standard		
<b>Gauge Wheels</b>	60: 13" x 6.5" 72 & 90: 16.5" x 6.5" Air Tires with Sealant and 3/4" Roller Bearings and Spacer Height Adjustment		
<b>Skid Shoes</b>	Replaceable		
<b>Machine Weight - lb (kg)</b>	980 (445)	1,000 (454)	1,150 (522)

\*See dealer for complete warranty information.

Color Options:



## Ideal for leveling and seedbed preparation.




3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.



### Aggressive Reversible Scarifier Shanks

10 1/2" x 2" x 1/2" Scarifier shanks aggressively rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.

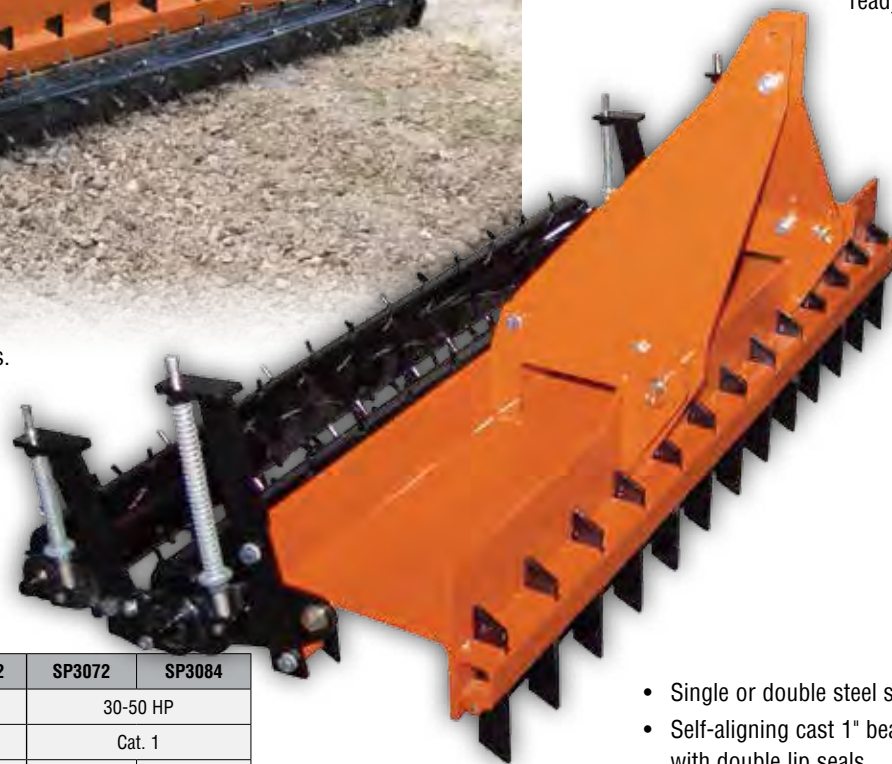

	SP2060	SP2072	SP3072	SP3084
<b>Horsepower</b>	25-35 HP		30-50 HP	
<b>Hitch</b>	Cat. 1		Cat. 1	
<b>Working Width (cm)</b>	60" (152)	72" (182)	72" (182)	84" (213)
<b>H-Beam</b>	10"		12"	
<b>Weight - Sgl Roller - lb (kg)</b>	491 (223)	561 (255)	671 (305)	721 (328)
<b>Front to Back Length - Single Roller</b>	25-1/2"		28-1/4"	
<b>No. of Scarifier Shanks</b>	21	25	25	29
<b>Shank Spacing</b>	2-13/16"		2-13/16"	
<b>No. of Spikes on Sgl Roller</b>	86	103	103	116
<b>No. of Spikes on Dbl Roller</b>	N/A	N/A	206	232
<b>Spiked Roller Tube Diameter</b>	5-9/16" O.D.		6 5/8" O.D. Optional 2nd Roller 5-9/16"	
<b>Roller Spike Material</b>	3/8" x 1-1/4" Steel, Replaceable Heat Treated		3/8" x 1-1/4" Steel, Replaceable Heat Treated	
<b>Springs</b>	32 lbs/inch		Front Roller: 32 lbs/inch Rear Roller: 5 lbs/inch	

- Single or double steel spiked roller
- Self-aligning cast 1" bearings with double lip seals
- 1" Diameter shaft in roller

Color Options:  






## Renovate, aerate, or rake.

The STH15 Series Spike Tooth Harrow cuts through clods, manure, and grasses to break up material into finer pieces so that it can be spread evenly across the ground. This harrow does an excellent job of smoothing garden plots, fields, arenas, and landscaping areas.

It loosens crusted soil, aerates legume crops such as alfalfa, and uncovers overwintering insects.

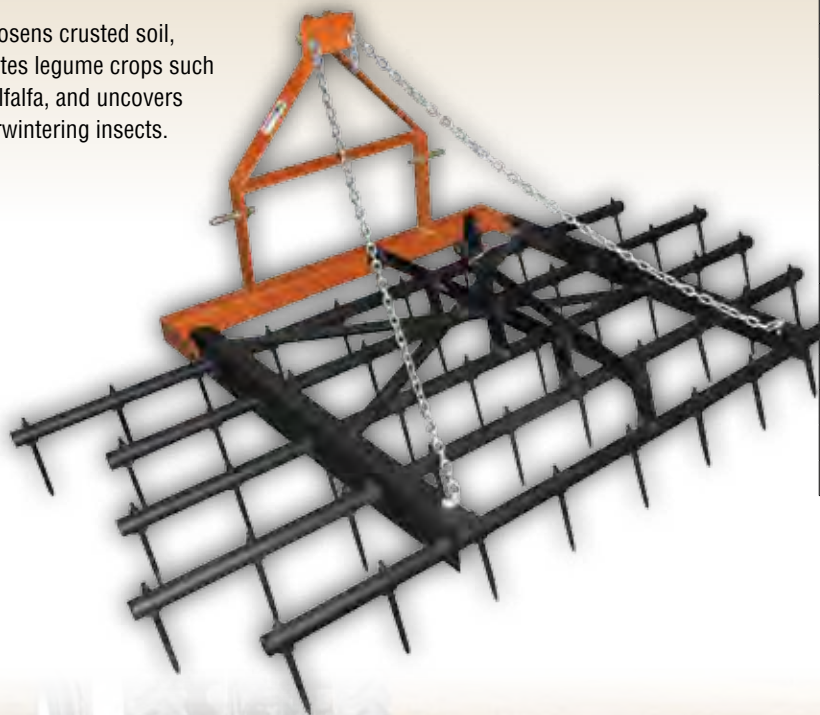

	STH1590	STH2024
Horsepower	20 HP Min.	45 HP Min.
Hitch	Cat. 1	Pull-type
Working Width (cm)	7'6" (229)	23'7" (719)
Transport Width	7'6"	8'6"
Transport Height	35-3/4"	8'8"
Transport Length	53"	15'
Field Length	53"	23'
Weight (kg)	224 (102)	2,100 (907)
Transport Tongue Weight	N/A	432 (196)
Tooth Spacing	9"	9"
Teeth on Ground (per foot)	7	12
Tooth Size	Diamond Shaped Forge Hardened 6" x 2-1/2"	Diamond Shaped Forge Hardened 6" x 2-1/2"
No. of Teeth	50	244
Tooth Angle	10 Different Angles	22 or 40 Degrees
Bars	5	8
Bar Material	1-11/16" OD	1-11/16" OD
Wing & Transport Tires	N/A	205R15
Hydraulic Fold	N/A	Standard

Color Options:



STH15 Only



The STH20 Series Spike Tooth Harrow can be used to spread manure, grass clippings, leaf litter, previous crop stubble, and gravel driveways; it can better incorporate fertilizers, herbicides, granular products, and broadcast seed into the soil. It also helps to remove gopher mounds, ant hills, ridges from tillage implements, sticks, and small limbs from grassy areas.



## Quickly turn limbs into mulch or to aid in decomposition.



**WC1503**

Adjustable support stands help elevate the Wood Chipper to match the height to your tractor's output shaft, enabling the driveline to remain straight and level.



Adjustable discharge spout rotates 270 degrees.

Land owners can utilize Land Pride's WC1503 3-point mounted Wood Chipper to quickly turn mountains of limbs into chips for mulch or just to aid in decomposition. Driven by the tractor's PTO, this unit features a self-feeding 3" cutting capacity, two reversible and replaceable hardened-steel knives, adjustable discharge chute, and dual B-section drive belts.

The WC1504 features a self feeding 4" cutting capacity, 4 reversible and replaceable hardened steel knives and adjustable discharge chute. The WC1504 features direct drive to the rotor. Both models offer adjustable support stands to better match your tractor.



**WC1504**

	WC1503	WC1504
Horsepower	12-30 HP Min. 25 HP for Max. Capacity	20-50 HP Min. 35 HP for Max. Capacity
Hitch	Cat. 1 Quick-Hitch Compatible	
Upper Hitch Plate Thickness	1/4"	5/16"
Main Frame Thickness	3/16"	
Weight - lbs (kg)	369 (167)	450 (204)
Rotor Housing Thickness	3/16"	
PTO Speed	540 rpm	
Driveline Category	Cat. 2 Shear-bolt	Cat. 4 Shear-bolt
Main Drive Pulley Diameter	16.35"	N/A-Direct Drive
Rotor Pulley Diameter	4-1/2"	N/A-Direct Drive
Belts	2 Single B section	N/A-Direct Drive
Belt Tensioner	Spring Loaded w/ Adjustment	N/A-Direct Drive
Rotor Size	17-1/2"	25"
Rotor Speed	1984 rpm	540 rpm
Chip Capacity	3"	4"
Hopper Inlet Opening	14" x 15"	20" x 20"
Chipper Inlet Opening	6" x 3"	10" x 4"
Spout Discharge Opening	3-1/4" Square	5-1/4"
Cutting Knife	Reversible and Replaceable	
Number of Knives	2	4
Knife Size	2-1/2" x 2" x 1/4"	6" x 2" x 1/4"
Knife Material	Hardened Steel	
Feed System	Self Feed	
Feed Height Above Ground	35" (No Skids)	24"-30" w/ Adjustable Support Stands
Chip Chute Position	270 Degrees	

Color Options:  



Knives are reversible and replaceable.



## Engineered for Sub-compact Tractors.

Land Pride's new QH05 Quick Hitch is specifically engineered for sub-compact tractors. The QH05 allows you to quickly connect to or disconnect from over 20 Land Pride products – most without leaving the tractor seat. Owners of sub-compact tractors will find that the Land Pride QH05 speeds implement changes, allowing more time to get chores completed.



\*Patents Pending



For a complete list of compatible Land Pride implements, scan QR code or visit [landpride.com/QH05](http://landpride.com/QH05)



*\*The QH05 does not increase the lifting capacity of your sub-compact tractor. Refer to your tractor owner's manual for lifting capacity.*

## The True Timesavers.

Our Quick-Hitch Systems, designed in accordance with ASAE specifications, fit most Land Pride products and are a real time saver when working on multiple projects. Look for this Quick-Hitch System logo to denote applicable products throughout our product line.



	QH05	QH15	QH20
<b>3-Point Hitch</b>	Cat. 1, Sub-Compact*	Cat. 1	Cat. 2
<b>Overall Width (cm)</b>	32-5/8" (81)	32-5/8" (81)	40" (102)
<b>Overall Height</b>	20-1/4"	23-1/4"	23-5/8"
<b>Overall Length</b>	6-1/2"	9"	8-7/8"
<b>Weight lbs (kg)</b>	37 (17)	70 (32)	120 (54)
<b>Automatic Lock</b>	Auto Lock with Quick Release		
<b>Optional</b>	Floating Top Link Attachment Optional		

Color Options:   

\*PTO driven implements may need a longer driveline. Please consult our Service & Parts Department for longer profile availability.



Implement hitch



QH15

QH20

An optional link is available for implements that have a swiveling top link.





## Expand your material handling capabilities with forks from Land Pride.

Land Pride's bucket-mounted PF Series of Pallet Forks transforms your tractor bucket loader into a forklift. With 1,000 and 2,000 lb capacities, the PF10 and PF20 quickly attach and detach adding versatility to your loader.

PFL and PFLE Series Pallet Forks from Land Pride are great for retail operations, nurseries, and farms; the heavy-duty PFL64 Series is at home on construction and industrial sites. The PFL models mount to the front loader plate of your tractor and PFLE Models mount to your Euro Hitch, effectively changing your loader into a forklift and increasing your material handling capabilities. With capacities from 2,100 lbs to 6,400 lbs, you will quickly find these attachments save you time and labor!

### BUCKET MOUNTED

	PF10	PF20
<b>Hitch</b>	Bucket Mounted	
<b>Lift Capacity - lb (kg)</b>	1,000 (454)	2,000 (907)
<b>Tine Length</b>	31-5/8"	35-5/8"
<b>Weight - lb (kg)</b>	55 (25)	65 (29)
<b>Tine Width</b>	3"	
<b>Tine Height</b>	2"	
<b>Threaded Clamp Rod</b>	1-1/4" - 7"	
<b>Throat Opening</b>	1-1/2"	
<b>Throat Depth</b>	10-3/4"	
<b>Sliding Clamp Handles</b>	9" Arm Length (Center of Screw to End of Arm)	

Color: 

### UNIVERSAL QUICK-ATTACH OR FRONT LOADER PLATE

	PFL2042	PFL3042	PFL3048	PFLE4548	PFLE5548	PFLE5560	PFL6448 PFLE6448	PFL6460 PFLE6460
<b>Hitch</b>	Universal Quick-Attach			Euro Hitch			Universal Quick-Attach or Euro Hitch	
<b>Lift Capacity -lb (kg) (per set of 2)</b>	2,100 (952)	3,000 (1,360)	3,000 (1,360)	4,500 (2,041)	5,500 (2,494)	5,500 (2,494)	6,400 (2,902)	6,400 (2,902)
<b>Tine Length</b>	42"	42"	48"	48"	48"	60"	48"	60"
<b>Frame Width w/Step</b>	50"			50"	50"	50"	64-1/2"	64-1/2"
<b>Weight - lb (kg)</b>	330 (150)	340 (154)	358 (162)	412 (187)	436 (198)	482 (219)	686 (311)	744 (337)
<b>Tine Width</b>	4"			4"	4"		4-3/4"	
<b>Tine Height</b>	1"	1-1/4"	1-1/4"	1-1/2"	1-3/4"		1-3/4"	



Color: 



- Spring loaded toggle fork position lock
- 3/16" Backframe guard
- Removable top center bracket for walk through





## Easy handling of round or square bales

The BS Series Bale Spears can be attached to CTLs, skid steers, or tractor loader arms fitted with a skid mounting plate. BSE units fit the Euro-Hitch plates. The BSR Series are 3-point Bale Spears for moving large, heavy, round or square bales. All units are American-made and have a 1-year limited warranty.

	BS(E)10	BS(E)20	BS(E)30	BS(E)40	BS(E)50
Mount	Universal Quick-Attach or Euro Hitch				
Lift Capacity - lb (kg) 24" from face of frame	1,800 (817)	2,500 (1,134)	3,000 (1,360)	3,000 (1,360)	4,000 (1,814)
Usable Spear Length	45" 19" Stabilizer	45"	28", 35", & 45"	28", 35", & 45" 19" Stabilizer	28", 35", & 45"
Max. Weight - lb (kg)	168 (76)	208 (94)	228 (103)	242 (110)	286 (130)
Stabilizer Extension - lb (kg)	N/A	N/A	70 (32)		
Stabilizer Extension Height	N/A	N/A	61.4"		
Spear Construction	Forged				



	BSR10	BSR20	BSR30	BSR40
<b>Mount</b>	3-Point, Cat. 1 or 2	3-Point, Cat. 2 or 3		
<b>Lift Capacity - lb (kg)</b> 24" from face of frame	1,800 (817)	3,000 (1,360)	3,000 (1,360)	4,000 (1,814)
<b>Usable Spear Length</b>	44" Upper 19" Lower	44"	32" Option: 28" 39" Option: 34" 43" Option: 44"	44"
<b>Number of Spears</b>	3	2	3	4
<b>Max. Weight - lb (kg)</b>	112 (51)	152 (69)	165 (75)	252 (114)
<b>Spear Construction</b>	Forged			



Color:



## Quickly handle big jobs.


Move brush, clean stalls, lift debris, and so much more with Land Pride's SGC0548 Claw Grapple. The SGC05 will make chores a breeze. Easily grasp, lift, and move a variety of materials making property maintenance easier and less time consuming.

Our SGC05 tines are manufactured from high-tensile AR400 Steel to make sure it stands up to demanding use. For added strength, the frame is made of 2" x 3" rectangular tubing. And it carries the Land Pride name, so you know quality is built in.



	SGC0548
Mount	Kubota BX Quick Hitch System or pin direct to loader arms
Width	48"
Weight - lbs (kg)	156 (71)
Closed Height	26-1/2"
Number of Bottom Teeth	6
Number of Top Teeth	5
Teeth Spacing	9-3/8"
Tooth Thickness	1/4"
Working Length of Teeth	8-3/8"
Jaw Opening	30"
Tine Material	AR400

Color:



Land Pride 3rd Function Valve accessory kit adds versatility to your tractor. (380-137A)



Convenient Park Stand provides stability while storing, simplifying attachment and detachment.



The frame is built from 2" x 3" rectangular tubing for added strength.



## Four tools in one to increase versatility.

Land Pride's new 4-n-1 Combination Bucket, specifically designed for Kubota BX Tractors, increases the versatility of the front loader. As the name implies, 4-n-1 Buckets are designed to act like 4 attachments – dozer blade, scraper blade, grapple, and bucket.

The CB0550 Combination Bucket fits Kubota 60 and 70 Series BX Front Loaders. It features dual 2 x 6 cylinders, 1" jaw pivot points, 30" jaw opening, spill screen, reinforced side plates, and optional 3rd function valve. It weighs approximately 260 lbs. so lifting capacity of the tractor is not greatly diminished.

	CB0550
Horsepower	Up to 28 HP
Mount	Fits Kubota 60 & 70 Series BX Tractors only
Width	50"
Weight - lbs (kg)	266 lbs (121)
Max. Jaw Opening	30"
Bucket Depth	21"
Cutting Edges	3/8" x 3"
Side Panels	3/16"
Bottom and Back Plate	10 Gauge
Hydraulic Cylinder	2 Qty, 2" x 6" x 1-1/8"
Hydraulic Cylinder Rating	2,500 PSI
Hinge Points	1" Pins

Color:



## Add versatility to your Compact Tractor.

The SGC06 will move brush, rocks and debris, making chores a breeze. Just like our popular SGC0548, this grapple allows you to easily grasp, lift, and move a variety of materials greatly reducing the time spent on property maintenance.

The tines on the SGC06 are manufactured from high-tensile AR400 Steel making it light-weight, yet extremely durable. For additional strength, the frame is made of stout 2" x 3" rectangular tubing. The hinge points feature 3/4" greasable pins. Plus the Land Pride name means there is quality built in.

Land Pride also has six 3rd Function Valve Kits for a variety of Kubota tractor/loader combinations. Add versatility to your tractor by completing the package with a 3rd Function Kit.



	SGC0660
Mount	Universal Quick-Attach Kubota B Mount, or Blank*
Width	62"
Weight - lbs (kg)	247 (112)
Closed Height	30"
Number of Bottom Teeth	7
Number of Top Teeth	6
Teeth Spacing	9-3/8"
Tooth Thickness	5/16"
Working Length of Teeth	9"
Jaw Opening	32"
Tine Material	AR400

Color: 







SGC10



## Make quick work of large jobs.

Land Pride's Claw Grapple makes quick work of large jobs. The SGC can be used to rake, dig, and move rocks, trees, brush, and construction debris without picking up dirt. The compact design minimizes weight while preserving lift capacity. This unit comes complete with the durability that Land Pride is known for. Our Claw Grapple is ideal for an all-purpose grapple.



SGC15



The 10 Series Claw Grapples features AR400 teeth construction. This abrasion resistant steel has a tensile strength five times that of A36 steel. For heavy use in varied extreme conditions, the SGC10 & SGC20 allows for a longer life. The AR400 also possesses additional 'memory'; allowing bent teeth to potentially spring back into position.



All pivot points feature 1-1/4" greasable pins.



6" x 6" Frame tube for strength and serrated teeth keep material from rolling out.

Color:

	SGC1060	SGC1072	SGC1560	SGC1572	SGC1584
<b>Hitch</b>	Universal Quick-Attach, Kubota B Mount, or Blank*		Universal Quick-Attach		
<b>Width</b>	62"	75"	63"	74"	86"
<b>Weight - lbs (kg)</b>	356 (161) w/o hitch	414 (188) w/o hitch	784 (356)	882 (400)	987 (448)
<b>Closed Height</b>	33"		39"		
<b>Number of Bottom Teeth</b>	10	12	10	12	14
<b>Number of Top Teeth</b>	9	11	9	11	13
<b>Spacing of Teeth</b>	6"		6"		
<b>Tooth Thickness</b>	1/2" Outer; 3/8" Inner		1/2"		
<b>Working Length of Teeth</b>	11-1/4"		12-7/8"		
<b>Hydraulic Cylinder</b>	2" x 6" x 1-1/8" Rod		3" x 10" x 1-1/4" Rod		
<b>Jaw Opening</b>	39-1/2"		50"		
<b>Tine Material</b>	High Tensile AR400		Grade 80		

\*For Dealer Installed Hitch Plate





## Ideal for storm clean-up and land clearing operations.

Let the Land Pride Skeleton Grapple do the digging for you by removing roots, stumps, and other timber or debris. These are available in 66" and 78" widths and with 5-1/2" spacing between the teeth, smaller debris is sifted easily. Dual hydraulic cylinders on the SGS15 can close at various gaps to handle irregular shapes, and serrated teeth make this grapple a work-horse in storm clean up and land clearing operations. Our Skeleton Grapple also features available bolt-on side panels.



SGS15



SSB15

	SGS1566	SGS1578	SSB1578
Hitch	Universal Quick-Attach		Universal Quick-Attach
Width	66"	78"	78"
Weight - lbs (kg)	680 (308)	732 (332)	379 (172)
Closed Height	31"		N/A
Number of Bottom Teeth	12	14	14
Spacing of Teeth	5-1/2"		5-1/2"
Tooth Thickness	3/8"		3/8"
Working Length of Teeth	35"		35"
Hydraulic Cylinder	2" x 8" x 1-1/4" Rod		N/A
Jaw Opening	37"		N/A
Lower Tine Material	Grade 80		Grade 80



Optional bolt-on side panels.



Serrated teeth design allows for better load gripping.



Optional covers protect hydraulic cylinders and fittings.



Color: 

Open ends allow for greater capacity.





## Add Versatility to Your Tractor

The Land Pride GBE25 and GB25 Series Grapple Buckets are ideal for use on your farm, ranch, dairy, construction site or nursery. These American-made, large capacity grapple buckets have the capability to quickly and conveniently turn your tractor loader into a versatile tool for handling large bales or loose and shredded materials such as straw, hay, silage, manure, branches, sticks, wood, and trash.

The heavy-duty grapple with high-strength cast tines helps hold the loose and/or shredded materials in the bucket for picking and transporting. The large, 84" jaw opening allows the operator to grasp even the largest loads.



	GB2590 GBE2590	GB2596 GBE2596	GB25108 GBE25108
<b>Hitch Style</b>	GB: Front loader plate mount GBE: Euro hitch plate		
<b>Weight (Optional BOE &amp; Valve included)</b>	1,610 lbs	1,648 lbs	1,781 lbs
<b>Bucket Capacity (Struck)</b>	1.00 cu yd	1.07 cu yd	1.18 cu yd
<b>Overall Width</b>	90"	96"	108"
<b>Grapple Opening (with BOE)</b>	84"	84"	84"
<b>Number of Tines</b>	4	4	5
<b>Tine Construction</b>	Bolt-on ductile iron tine with reinforced gussets		
<b>Tine Thickness</b>	3/4"		
<b>Hydraulic Cylinder</b>	Dual 3" x 14" x 1-1/2" rod		
<b>Maximum Pressure Rating</b>	3500 psi		

Color Options: 



## Achieve long lasting results with top quality components.

The auger pulls the snow inward as the auger paddles direct it into the high speed impeller. Snow is thrown out of the adjustable chute so you can direct it right where you want it. Because the Snow Blower is making two points of contact with the snow, it can break up hard compacted snow and cover a wider clearing path.

- Hardened Cutting Edge
- Shear Bolt Driveline
- Heavy Duty Chute
- Choice of Skid Shoes
- Telescoping Hitch



	SB1051	SB1064	SB1574
<b>Horsepower</b>	18-32 HP	18-59 HP	30-59 HP
<b>Telescoping Hitch</b>	Cat. 1, Quick-Hitch Adaptable		Cat. 1, Quick-Hitch Adaptable
<b>Working Width (cm)</b>	51" (130)	64" (163)	74" (188)
<b>Weight - lb (kg)</b>	390 (177)	501 (227)	545 (247)
<b>Main Housing Material</b>	12 Gauge		12 Gauge
<b>Side Plate Material</b>	3/16"		3/16"
<b>Optional Cutting Edge</b>	Bolt-on, Reversible & Replaceable Hardened Steel		Bolt-on, Reversible & Replaceable Hardened Steel
<b>Optional Skid Shoes (Choice of)</b>	Outer: Bolt-on, Adjustable & Replaceable Wear Plate: Bolt-on, Hardened, Replaceable and Reversible Button Style: Adjustable & Replaceable		
<b>Impeller</b>	20" Diameter, 4 Blades		24" Diameter, 4 Blades
<b>Impeller Housing Depth</b>	6"		8"
<b>Auger</b>	1 - 14" Diameter, 3/8" x 2-1/2" Flighting		1 - 16" Diameter, 3/8" x 2-1/2" Flighting
<b>Auger Paddles</b>	2	4	4
<b>Drive Chain</b>	#60 Heavy		#60 Heavy
<b>Chute Opening at Base</b>	8"		10"
<b>Chute Rotation</b>	Sprocket Type; Manual, Electric or Hydraulic		Sprocket Type; Manual, Electric or Hydraulic
<b>Chute Deflector Operation</b>	Manual, Electric or Hydraulic		Manual, Electric or Hydraulic
<b>Driveshaft Shear Bolt</b>	Grade 5 - 1/4 x 20		Grade 5 - 1/4 x 20
<b>PTO Driveline</b>	Cat. 2, Shear Bolt		Cat. 3 Heavy, Shear Bolt

Color Options:



See page 109 for photos of Snow Blower options.



## Ideal for clearing parking lots, long driveways and roadways.



Designed for tractors ranging from 43 to 105 HP with Cat. 1 or Cat. 2 hitches, the SB2584 Snow Blowers are designed to remove snow from parking lots, walking paths, homeowner lanes, and driveways. The 84" width, 16" auger, and 24" impeller make short work of the largest snow removal tasks.

	SB2584
Horsepower	43-105 HP
Telescoping Hitch	Cat. 1 & 2, Quick-Hitch Adaptable
Working Width (cm)	84" (213)
Weight - lb (kg)	875 (397)
Main Housing Material	12 Gauge
Side Plate Material	3/16"
Optional Cutting Edge	Bolt-on, Reversible & Replaceable Hardened Steel
Optional Skid Shoes (Choice of)	Outer: Bolt-on, Adjustable & Replaceable Wear Plate: Bolt-on, Hardened, Replaceable & Reversible Button Style: Adjustable & Replaceable
Impeller	24" Diameter, 4 Blades
Impeller Housing Depth	10"
Auger	1 - 16" Diameter, 3/8" x 2-1/2" Flighting
Auger Paddles	4
Drive Chain	#60 Heavy
Chute Opening at Base	12"
Chute Rotation	Sprocket Type; Manual, Electric or Hydraulic
Chute Deflector Operation	Manual, Electric or Hydraulic
Driveshaft Shear Bolt	Grade 5 - 1/4 x 20
PTO Driveline	Cat. 3 Heavy, Shear Bolt

Optional front cutting edge and inner or outer depth shoes can be purchased with all models to increase the life of the units and to prevent gouging on uneven surfaces.



Side Wear Plate



Button-style



Outer Skid Shoe


Chute Rotation available in Manual, Hydraulic, or Electric. The chute rotates so you can direct the snow right where you want it.



Manual Chute Rotator



Optional Electric Rotator



Tilt can be easily adjusted manually, or with electric or hydraulic option.

Color Options:



Optional Hydraulic Rotator

## Make quick work of winter's biggest jobs.

Land Pride's SBD35 Snow Blowers feature an adjustable, telescopic Cat. 2 and Cat. 3 to allow for easy hook up with or without a Quick Hitch. 1/4" side plates with reinforced gussets wrap on the main housing to create an exceptionally strong blower.

Dual 16" diameter augers feed the SBD35's massive 34" impeller to help the SBD35 dive into the biggest piles without bogging down on the volume. The Augers are chain driven with a shear bolt on the sprocket drive shaft to protect the gearbox and driveline from damage.




Both models have a telescoping Cat. 2 or Cat. 3 reinforced hitch for use with or without a Quick Hitch.



Hydraulically controlled chute is gear driven for smooth efficient operation.



The shear-bolt on sprocket drive shaft protects gearbox and driveline from damage.



Aggressive augers manufactured from 3/8" plate steel chew through snow and ice.

	SBD3596	SBD35108
<b>Horsepower</b>	85-125 HP	120-180 HP
<b>Hitch</b>	Cat. 2 & 3, Adjustable	
<b>Working Width (cm)</b>	96" (244)	108" (274)
<b>Weight - lb (kg)</b>	1614 (732)	1964 (891)
<b>Main Housing Material</b>	10 Ga.	3/16"
<b>Side Plate Material</b>	1/4"	
<b>Impeller</b>	34" Diameter	
<b>Impeller Housing Depth</b>	10 1/8"	12-3/8"
<b>Impeller Blades</b>	4	
<b>Auger</b>	16" Diameter	
<b>Auger Flighting</b>	3/8" Plate Steel	
<b>Auger Paddles</b>	4	
<b>Chute Opening at Base</b>	12"	15-5/8"
<b>Chute Rotation</b>	Sprocket Type; Hydraulic	
<b>Chute Deflector Operation</b>	Manual or Hydraulic	
<b>Cutting Edge</b>	1/2" x 6", Reversible & Replaceable; Heat Treated	
<b>Skid Shoes</b>	Outer-Side-Mount, Inner-Rear Mount Adjustable & Replaceable	

Color Options: 



## Move snow with hydraulic-driven SBL25.

The SBL25 is a front-mount Snow Blower designed to fit skid steers and tractors with Quick-Attach plates. It is a fully hydraulic unit – auger, impeller, chute, and deflector – and features a 24" impeller and 16" auger. The auger features 4 paddles to direct snow into the 4-blade impeller to direct the snow into the chute. Skid shoes are adjustable and replaceable.



	SBL2566	SBL2574
Horsepower	12-33 gpm	
Hitch	Universal Quick-Attach	
Working Width (cm)	66"	74"
Weight - lb (kg)	816 (370)	938 (425)
Drive and Control System	Hydraulic motors with electric over hydraulic	
Hydraulic Requirements	Low volume motor option: 12-19 gpm Medium volume motor option: 20-26 gpm High volume motor option: 27-33 gpm 30-60 Hydraulic HP	
Hydraulic Pressure Rating	2500-3500 psi	
Main Housing Material	10 Gauge	
Side Plate Material	3/16"	
Chute Opening at Base	10"	10"
Impeller Housing Depth	8"	8"
Impeller Diameter	24"	
Number of Impeller Blades	4	
Auger Diameter	16"	
Number of Auger Paddles	4	
Chute Opening at Base	10"	10"
Chute Rotation	220° Hydraulically driven sprocket	
Spout Deflector	Hydraulic operation	
Spout Deflector Cylinder	Double acting 2" x 4" x 1-1/2" rod	
Skid Shoes	Bolt-on, adjustable & replaceable	
Cutting Edge	Bolt-on, reversible, and replaceable full length cutting edge	



Color Options:  

## Add hydraulic power with ease.

The HRS is a self contained power pack to run log splitters, chippers, front-mounted snowblowers and more. Easily hook to the 3-point hitch on your tractor, hook the driveline to the tractor's PTO shaft, and you have a convenient supply of hydraulic power.



	HRS3025
Horsepower	52 Min.
Hitch	Cat. 1 & 2
Pump Capacity	Approx. 25 GPM @ 540 RPM
PTO Input Speed	540 RPM
Hydraulic Fluid Type	Mobil Fluid 424
Overload Protection	Hydraulic Relief Valve
Reservoir Capacity & Filter Type	35 Gallons, Conventional 10 Micron Filter
Overload Protection	3000 PSI Hydraulic Relief Valve
Driveline	ASAE Category 3
Pressure & Return Hose Lengths	24 Feet Each
Case Drain Port	3/4" - 16 UNF
Hydraulic Cooler	Optional

Color: 



### Optional Valve Selections

- No Valve - Use PTO to turn hydraulics on and off
- Manual Valve - Use remote valve to turn hydraulics on and off
- Solenoid Valve - Use electronic control to turn hydraulics on and off
- Add hydraulic power to your tractor to power front mounted hydraulic driven implements
- Can also be used to power independent implements such as a log splitter







## Efficient Snow Removal with Loader-Mount Blades.

The STB10 and STB15 Snow Trip Blades are designed to fit tractor loaders. The STB10 is available in 5' and 6' widths for tractors with loaders in the 25-40 HP range. The 10 Series Model has a 21" curved moldboard. The STB15 is designed for tractors 30 to 70 HP and is available in 5', 6', 7', and 8' widths. The 15 Series features a 27" curved moldboard. Both models feature dual trip springs and abrasion resistant AR400 skid shoes. Hydraulic angling options are available on both units as well and both have safety orange edge markers as standard equipment.

	STB10	STB15
Carrier Horsepower Range	25-40 HP	30-70 HP
Hitch/Mount	Quick-Attach	Quick-Attach
Widths	60", 72"	60", 72", 84", 96"
Moldboard Height	21" Curved blade	27" High curved blade
Moldboard Material	12 gauge	10 gauge
Moldboard Spring Trip	2 Spring protection	
Moldboard Trip	Can be locked for light grading	
Blade Widths	5-6 ft.	5-6-7-8 ft.
Skid Shoes Button Style Standard	AR400 Material	
Angling	Up to 30 degrees	
Optional Hydraulic Cylinder(s)	Single, Dual or dual with cushion valve	Dual or dual with cushion valve
Manual Angle Positions	2-left 1-center 2-right	
Adjustable Spring Tension	Standard	
Carrier Lift Capacity	Less than 3,500 lbs	Less than 5,000 lbs
Carrier Max Operating Weight	Less than 4,500 lbs	Less than 8,000 lbs
Max. Hydraulic Pressure Rating	3,000 psi	
Replaceable Wear Edge	1/2" x 6" Mild Steel or 1/2" x 6" Poly	
Marker Kit	Standard	



\*NOT to be used on Skid Steers


Color:



## Handle large amounts of snow in little time.

The SPL Loader-Mount Snow Pushers are available in an 05 Series that fits BX 60 or 70 Series Tractors only. The SPL05 Snow Pusher is available in a 48" and 60" model with a BX hitch. The unit is 18" high and 18" deep, features a 12 gauge moldboard, 3/16" side panels, and optional steel or poly blades.

The SPL10 Snow Pusher is available in 60", 72", and 84" with a 24" x 24" box, 10 gauge moldboard, and 1/4" sides. The SPL10 skid shoes are manufactured from abrasion resistant AR400 steel and are replaceable. Optional pull back and steel or rubber blades are also available.

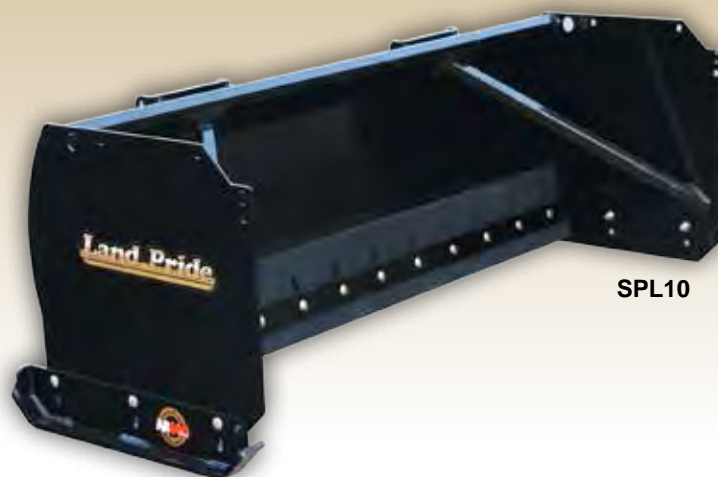


**SPL10**



**SPL05**

	SPL05	SPL10
<b>Horsepower</b>	Up to 28 HP	25-45
<b>Hitch</b>	BX Hitch	Universal Quick-Attach
<b>Working Width</b>	48", 60"	60", 72", 84"
<b>Height</b>	18"	24"
<b>Depth</b>	18"	24"
<b>Moldboard</b>	12 gauge	10 gauge
<b>Side Panels</b>	3/16"	1/4"
<b>Optional Blades-replaceable</b>	Steel: 3/8" x 4" Poly: 1/2" x 6"	Steel: 1/2" x 6" Rubber: 1" x 8"
<b>Pullback Blade</b>	Optional	Optional
<b>Skid Shoes</b>	Replaceable	AR400, Replaceable

**SPL05**  
Color: 

**SPL10**  
Color: 



## Quickly clears snow from large areas.

Handle anything Old Man Winter throws at you with Land Pride's SSP25 Series Snow Pushers. Skid shoes are designed with AR400 steel for greater wear life and both models have steel wear edges available. Get more work done quickly with Land Pride Snow Pushers.



**NEW!**

	SSP2510	SSP2512
Horsepower	50-80 HP	
Hitch	Universal Quick-Attach	
Working Width	10'	12'
Carrier Lift Capacity	Less than 5,000 lbs	
Carrier Max Operating Weight	Less than 8,000 lbs	
Moldboard Height	36"	
Moldboard Thickness	3/16"	
Side Panels w/ Supports	5/16" Plate	
Blade Depth	35"	
Replaceable Bottom Wear Edge	1-1/2" x 8" Rubber w/Slotted Holes	
Mounting Steps	Serrated, on hitch	
Skid Shoes	AR400 1/2" x 4" Reversible, Adjustable	
Option	Pull Back Kit	

Color:



The SSP25 boasts up to 5,000 lbs. of lift capacity.



A Division of Great Plains Mfg., Inc.  
1525 E. North St. • P.O. Box 5060  
Salina, Kansas 67401  
Visit our dealer locator at [landpride.com](http://landpride.com)

## Over 300 Products To Fit Your Lifestyle

All-Flex Mowers • All-Purpose Seeders • Bale Spears • Box Scrapers • Compact Drills  
Core Aerators • Crimpers • Disc Harrows • Ditchers • Drag Harrows • Drag Scrapers • Fertilizer Spreaders  
Field Cultivators • Flail Mowers • Food Plot Seeders • Grading Scrapers • Grapples • Grooming Mowers  
Hydraulic Reservoir Kits • Landscape Rakes • Moldboard Plows • No-Till Seeders • Overseeders • Pallet Forks  
Pasture Aerators • Post Hole Diggers • Powered Rakes • Primary Seeders • Quick-Hitches • Rear Blades  
Ripper Shanks • Rotary Cutters • Rotary Tillers • Scarifiers • Seed Bed Rollers • Snow Blowers • Snow Pushers  
Snow Trip Blades • Soil Pulverizers • Spike Tooth Harrows • Wood Chippers • Zero Turn Mowers